

COAST COUNTIES TRUCK AND EQUIPMENT CO.



DBA: COAST COUNTIES PETERBILT

MAIN OFFICE: 1740 N. 4TH ST. SAN JOSE CA 95106-0757
PHONE: 408-453-5510 FAX: 408-453-7637

260 DOOLITTLE DR SAN LEANDRO CA 94577
PHONE: 510-568-6933 FAX: 510-562-5564

920 ELVEE DR SALINAS CA 3902-2441
PHONE: 831-758-2441 FAX: 831-758-3374



Since 1949

Sold To: Lake County Sheriff's Office Contact: Gavin Wells 4913 Hellbush Drive Lakeport, CA 95453 Phone: 707-262-4228 Fax: 77-262-4220 E-Mail: gavin.wells@lakecountyca.gov		Ship To: Same Phone: Fax: Via:		Quote <u>Q61350398</u>	
<p><u>We are pleased to offer the following for our consideration in accordance with NJPA Contract # 081716-PMC</u></p> <p>(1) 2019 Peterbilt 337 Single Axle Tractor 12,000 front Axle & front Suspension 20,000 Rear Axle & Rear Suspension PACCAR PX-9 370/1250 Diesel Engine Allison 3000 RDS-P Automatic Transmission</p> <p>Total Peterbilt List Price \$133,991.00 29.59% NJPA Contract Discount (\$39,648.00) Total NJPA price for Peterbilt 337 \$94,343.00</p> <p><u>Sourced Goods / Open-Market Items Not Subject To NJPA Contract</u></p> <p>In Service Package #2 includes chrome hub caps, nut covers, floor mats, and 9 page work ready inspection 60 Days Flooring @ 7.75% Delivery to Lakeport Driver Training Detail</p>					
Note's		Subtotal:		97,773.64	
		Sales Tax 7.250%		7,088.59	
Authorized Signature: _____ Date: _____		Federal Excise Tax		10,661.00	
Purchase Order Number: _____		License Fees 53,000 CGVWR		2,262.00	
		California Tire Tax		10.50	
		Deposit		0.00	
All trucks to be funded within 15 calendar days of the dealers receipt of the trucks in order to avoid additional flooring charges unless previously arranged.		Total Invoice		117,795.73	
REMIT TO: PO BOX 757, SAN JOSE, CA 96106					

PURCHASE CONDITIONS

It is further understood and agreed that the order on the reverse side is subject to the following terms and conditions which have been mutually agreed upon:

1. If a date for delivery has been specified in this order, it is understood that Dealer will endeavor to make delivery to the Purchaser on or about such date without liability, whatsoever, to the Dealer, and Dealer may make delivery at the earliest practicable date as determined by Dealer. In the event that no date for delivery has been specified in this order, it is understood that Dealer may make delivery at the earliest practicable date as determined by Dealer.
2. Dealer shall not be liable for delays caused by the Manufacturer or any accidents, strikes, fires or any cause whatsoever beyond the control of the Dealer.
3. The price of the product quoted herein does not include any tax or taxes imposed by any governmental authority prior to or at the time of delivery of such product unless expressly so stated, and the Purchaser assumes and agrees to pay any taxes imposed on or incidental to the transaction herein regardless of the person having the primary tax liability.
4. If Dealer agrees to accept used equipment as a trade-in, Purchaser warrants that the trade-in is his own property and is free of any liens and encumbrances, except as disclosed herein. Dealer shall inspect the body and the mechanical condition and appraise the used equipment on the date of this offer. Purchaser warrants to deliver the trade-in on the delivery date in substantially the same condition as found on this inspection and without additional liens. Dealer reserves the right to re-inspect and re-appraise the trade-in on the delivery date and adjust the trade-in allowance accordingly.
5. If this order covers the purchase of used equipment, there are no warranties expressed or implied, representations, promises or statements in connection with the sale of the equipment covered by this order. Purchaser has had an adequate opportunity to inspect the equipment and make his own estimate as to the condition of the equipment. Used equipment is sold "as is" with absolutely no warranty or guaranty except that Dealer guarantees and warrants title to said property.
6. If this order covers new equipment, the same is given and accepted subject to the Manufacturer's warranty in effect at the time of delivery of the agreement. It is understood that no other warranties, agreements or representations of any kind whether expressed or implied, including any warranty of merchantability or fitness for a particular purpose, are made or have been authorized by Coast Counties Truck & Equipment Company with respect to this equipment unless endorsed herein and signed by the parties hereto. No adjustments, repairs or any items sold hereunder, or assistance given by the Dealer in connection with same, shall be deemed to be a waiver of any of the provisions of the aforesaid warranty.
7. The Purchaser agrees that damages arising from failure to consummate the sale contemplated by this Agreement may be difficult to measure and that a reasonable measure of damages will be the difference between the price set forth herein and the amount for which the equipment can be sold to another party, plus any costs, charges and related expenses that may be incurred by the seller to hold, store, maintain and sell the equipment.
8. In the event of litigation concerning any portion of this Agreement in which Dealer shall prevail, all Court costs and legal fees shall be paid by the Purchaser. Purchaser further agrees that venue in any action by or against Dealer shall be laid in the City of San Jose and in the County of Santa Clara which is the location of Dealer's principal office.
9. This order is not assignable by the Purchaser except with the Dealer's written consent.
10. It is understood that the Manufacturer has reserved the right to make changes in model and design in products and parts at any time without incurring any obligation to the Dealer to make corresponding changes in the product here ordered, either before or subsequent to delivery to the Purchaser and, accordingly, Dealer shall not be obligated to Purchaser in any way in the event of any such change.
11. Dealer is not responsible in any way for changes in specifications or design.
12. In the event Purchaser is a corporation, the person signing the order warrants that he has the power to bind the corporation, or, failing same, agrees to be bound in his individual capacity.
13. The acceptance of this order is subject to the completion of credit investigation and approval by the credit department of the Dealer.
14. In the event the terms of this order do not require payment in full in cash at the time of delivery, Purchaser agrees to execute and deliver a Security Agreement on a form generally used by Dealer at Dealer's option on terms satisfactory to Dealer and the handling charges, insurance costs, discount charges and any other expenses connected with sale of security interest may be added to the balance of the purchase price. It is understood and agreed that title to and right of possession of said equipment shall remain vested in Dealer until all obligations of Purchaser hereunder and payment of all other sums which may be due or are to become due from Purchaser to Dealer, whether evidenced by notes, book account, judgment, or otherwise, shall have been fully paid at which time ownership shall pass to the Purchaser. It is expressly agreed and warranted that this is a commercial sale and the equipment sold herein is to be used for commercial purposes.
15. The Dealer shall not be held liable or responsible for any costs or expenses or for any damages on account of personal injuries or injuries to property or otherwise suffered or sustained in the operation of this equipment, the subject of this order, nor for any damages alleged to result to Purchaser by reason of any delays or alleged failure of said equipment to operate.
16. The Dealer reserves the right to accept or reject this order and shall not be required to give any reason for non-acceptance.



Coast Counties Peterbilt C506
7675 Conde Lane

Lake County Sheriff's Office
4913 Helbush Drive

Windsor, California United States 95492
Phone: (707) 837-2727
Fax: (707) 837-0589
Email: ctaylor@coastcounties.com

Lakeport, California United States 95453
Phone: (707) 262-4228
Fax: (707) 262-4220
Contact Email: gavin.wells@lakecountyca.org
Prepared for: Gavin Wells

Vehicle Summary

Unit		Chassis	
Model:	Model 337	Fr Axle Load (lbs):	12000
Type:	Tractor	Rr Axle Load (lbs)	20000
Description:	MD Tractor	G.C.W. (lbs):	53000
Application		Road Conditions:	
Intended Serv.:	City Delivery	Class A (Highway)	100
Commodity:	Other Commodity	Class B (Hwy/Mtn)	0
		Class C (Off-Hwy)	0
		Class D (Off-Road)	0
Body		Maximum Grade:	6
Type:		Wheelbase (in):	155
Length (ft):	0	Overhang (in):	32.8
Height (ft):	0.0	Fr Axle to BOC (in):	72.2
Max Laden Weight (lbs):	0	Cab to Axle (in):	82.8
		Cab to EOF (in):	115.6
Trailer		Overall Comb. Length (in):	226
No. of Trailer Axles:	3		
Type:	Van	Special Req.	
Length (ft):	40	California Registry	
Height (ft):	13.5		
Kingpin Inset (in):	0		
Corner Radius (in):	0		
Restrictions			
Length (ft):	40		
Width (in):	102		
Height (ft):	13.5		

Approved by: _____ Date: _____

Note: All sales are F.O.B. designated plant of manufacture.

	Ask your dealer for a quote today, or visit our website @ www.paccarfinancial.com .
	PACCAR Financial offers innovative finance, lease and insurance programs customized to meet your needs.

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	4/10/2018 4:13:46 PM	Incomplete	Model Number:	Model 337
Effective Date:	Jan 1, 2018		Quote/DTPO/CO:	Q61350398
Prepared by:	Chris Taylor		Version Number:	36.10



Coast Counties Peterbilt C506
7675 Conde Lane

Lake County Sheriff's Office
4913 Helbush Drive

Windsor, California United States 95492
Phone: (707) 837-2727
Fax: (707) 837-0589
Email: ctaylor@coastcounties.com

Lakeport, California United States 95453
Phone: (707) 262-4228
Fax: (707) 262-4220
Contact Email: gavin.wells@lakecountycal.org
Prepared for: Gavin Wells

	Description	Weight
Base Model	Model 337	10,070
	Other Commodity	0
	City Delivery Truck or tractor which hauls freight, typically operating within a 100-mile radius, on public streets and highways and other paved surfaces. Typically includes package and freight delivery.	0
	Van	0
	California Registry Required for all vehicles that will be registered in the State of California.	0
Configuration	Not Applicable	0
	Secondary Manufacturer	
Frame & Equipment	10-5/8in Steel Rails to 285in 10.625 x 3.45 x .313 Dimension, 1,776,000 RBM; Yield Strength: 120,000 psi. Section Modulus: 14.8 cubic inches. Weight: 1.44 lbs/inch pair	-34
	Custom Wheelbase or Overhang Engineering approval may be required.	0
	155in Wheelbase For Use with Tractor Only	0
	Three-Piece Crossmembers	0
	Frame Components Bolted IPO Huck Fastened	0
	EOF Tractor Tapered with Xmb Includes Kingpin Cutout	0
	Peterbilt Rear Mudflaps and Coil Hangers 45 Degree	46
	Polyarmor Black Quarter Fenders with Peterbilt logo on flap	25
	Premier 370A Hitch (Requires A-Brace Operation) N07140 OAR502537	44
	Drop A-Brace For Tractor Taper EOF N07240 OAR502537	161

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 4/10/2018 4:13:46 PM
Effective Date: Jan 1, 2018
Prepared by: Chris Taylor

Incomplete

Model Number: Model 337
Quote/DTPO/CO: Q61350398
Version Number: 36.10



Description	Weight
Holland FW17 Fifth Wheel Top Plate	190
Rear Or Fixd Setting Centerline Bogie	0
Fifth wheel setting 0" behind bogie	
LH Fifth Wheel Release	0
7.6in - 8in Fifth Wheel Height	95
Holland Lightweight Air Slide	0
Not available with suspensions > 40k.	
24in Air Slide	216
Frame Mounted Deck Plate and Access Pkg, LH Side	41
Front Axle & Equipment	
Dana Spicer D1201IL 12,000 lb, 3.5 in. Drop	23
Axle features an integrated air disc brake (IADB) knuckle to improve braking and reduce maintenance for IADB applications. The axles are designed for applications with a gross axle weight rating (GAWR) of 12,000 pounds. IADB feature eliminates separate torque plate and fasteners. One piece forged design includes tie rod arm, torque plate and spindle. The forged knuckle adds reliability for turn angles and the unique design features improved durability and camber alignment.	
Taper Leaf Springs, Shocks 12,000 lb	0
Power Steering Sheppard HD94	0
For use with 10,000 to 13,200 lb. axle ratings.	
Power Steering Reservoir Frame Mounted	0
PHP10 Aluminum PreSet Hubs Air Disc	0
Dana Spicer Wide Track IPO Std, Front Axle	5
71in KPI IPO 69in for E1202, E1322, E1462, D2000F front axles. For improved turning radius.	
Air Disc Front Brakes	0
Complies with reduced stopping distance regulations.	
Pad Dust Shields for Air Disc Brakes; Front Axle	0
Rear Axle & Equipment	
Dana Spicer S21-170 21,000 lb	225
Laser factory axle alignment to improve handling & reduce tire wear. Magnetic rear axle oil drain plug captures & holds any metal fragments in drive axle lube to extend service life. Parking brakes on all drive axles for optimal performance. Cognis EMGARD® FE 75W-90 synthetic axle lube provides over 1% fuel economy improvement. Reduces wear & extends maintenance intervals, resulting in increased uptime. Provides improved fluid flow to protect components in extreme cold conditions & withstand the stress from high temperatures, extending component life.	
PHP10 Aluminum PreSet PLUS Hubs	0
Standard Stroke Parking Brakes	0
Drive Axle(s). Not for use on U.S. or Canada Tractors, other than Car Carriers.	

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	4/10/2018 4:13:46 PM	Incomplete	Model Number:	Model 337
Effective Date:	Jan 1, 2018		Quote/DTPO/CO:	Q61350398
Prepared by:	Chris Taylor		Version Number:	36.10



Description	Weight
X30 Brake Drums IPO STD, Drive Axle(s)	-79
Rear Brake Camshaft Reinforcement	9
Gusseted Cam Brackets, Drive Axle(s)	2
Stability System Not Selected or Not Available	0
Single Drive Axle (Model 337)	0
Anti-Lock Braking System (ABS) 4S4M ABS-6. Includes air braking system.	0
Bendix Air Cam Rear Drum Brakes 16.5x7 Includes Automatic Slack Adjusters & Outboard Mounted Brake Drums.	0
Ratio 4.78 Rear Axle	0
Peterbilt Air Trac 20,000 lb Light Weight	175
Air Springs, Internal Bumpers Air Trac / Air Leaf suspensions	0
Dash Mtd Dump Switch With Indicator Light For suspension	2

Engine & Equipment

PACCAR PX-9 370@1900 GOV@2100 1250@1400	0
Performance (2017 Emissions)	
N21320 N205 120...Standard Maximum Speed Limit [LSL]	
N21330 N207 0....Expiration Distance	
N21340 P005 120...Hard Maximum Speed Limit	
N21350 P001 75...Maximum Accelerator Pedal Vehicle Speed	
N21370 P059 75...Maximum Cruise Speed	
N21400 N203 252...Reserve Speed Function Reset Distance	
N21410 N202 0....Maximum Cycle Distance	
N21420 N206 10...Maximum Active Distance	
N21430 N201 0....Reserve Speed Limit Offset	
N21440 P015 NO...Engine Protection Shutdown	
N21450 P026 NO...Gear Down Protection	
N21460 P046 1400.Max PTO Speed	
N21470 P062 NO...Cruise Control Auto Resume	
N21480 P068 NO...Auto Engine Brake in Cruise	
N21500 N209 0....Expiration Distance	
N21510 P520 YES...Enable Idle Shutdown Park Brake Set	
N21520 P030 5....Timer Setting	
N21530 P233 YES...Enable Impending Shutdown Warning	
N21540 P234 60...Timer For Impending Shutdown Warning	
N21550 P516 35...Engine Load Threshold	
N21570 P031 NO...Idle Shutdown Manual Override	
N21590 P230 YES...Enable Hot Ambient Automatic Override	
N21610 P172 40...Low Ambient Temperature Threshold	
N21620 P173 60...Intermediate Ambient Temperature Threshold	
N21630 P171 80...High Ambient Temperature Threshold	
Engine Idle Shutdown Timer Disabled	0
Enable EIST Ambient Temp Override	0
Eff EIST NA Expiration Miles	0

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	4/10/2018 4:13:46 PM	Incomplete	Model Number:	Model 337
Effective Date:	Jan 1, 2018		Quote/DTPO/CO:	Q61350398
Prepared by:	Chris Taylor		Version Number:	36.10



Description	Weight
Effective VSL Setting 65.0 MPH or Greater (USA)	0
CARB Engine Idling Compliance PACCAR PX-7, PX-9 and MX, Cummins ISL, ISM and ISX diesel engines will include the required factory installed serialized sticker on the drivers door to identify them as meeting the NOx idling standard.	0
PACCAR 160 Amp Alternator, Brushed	0
PACCAR 12V Starter	0
2 PACCAR Premium 12V Dual Purpose Batt 1460 CCA Threaded stud type terminal. Stranded copper battery cables are double aught (00) or larger to reduce resistance.	0
Battery Jumper Terminal Mounted Under Hood LH Frame Rail. Not available with PX-7 engines.	4
Kissling Battery Disconnect Switch Mounted on battery box	3
2-Speed Fan Clutch For Frequent Start/Stops	0
18.7 CFM Air Compressor N/A X15. Furnished on engine. Teflon lined stainless steel braided compressor discharge line.	0
C-Brake By Jacobs, PX-9	90
Spin-On Fuel/Water Separator	0
No Fluid Heat Option for Fuel Filter	0
No Electric Heat Option for Fuel Filter	0
High Efficiency Cooling System Cooling module is a combination of steel and aluminum components, with aluminum connections to maximize performance and cooling capability. Silicone radiator & heater hoses enhance value, durability, & reliability. Constant tension band clamps reduce leaks. ClimaTech extended life coolant extends maintenance intervals which reduces maintenance costs. Anti-freeze effective to -30 degrees F helps protect the engine. Low coolant level sensor warns of low coolant condition to prevent engine damage. Radiator Size by Model: 587: 1330 sq in, 579/367 FEPTO 1325 sq in, 567/365/367: 1440 sq in, 384/386: 1301 sq in, 365 FEPTO: 1184 sq in, 389/367 HH: 1669 sq in, 348: 1000 sq in, 320: 1242 sq in.	0
Radial Seal, Dry Type Air Cleaner, Frontal Air Intake. Molded rubber air intake connections with lined stainless steel clamps seal to prevent contaminants in air intake.	0
Exhaust Single RH Side Of Cab DPF/SCR RH Under Cab (2017).	29
7in Dia Chrome Plated Steel Standpipe(s) IPO 5in	0
36in Ht, 5in Dia Chrome, Clear Coat Standpipe(s)	4

Transmission & Equipment

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 4/10/2018 4:13:46 PM
Effective Date: Jan 1, 2018
Prepared by: Chris Taylor

Incomplete

Model Number: Model 337
Quote/DTPO/CO: Q61350398
Version Number: 36.10



Description	Weight
Allison 3000 RDS-P Transmission, Gen 5 Rugged Duty Series. Includes Rear Transmission Support except on MX engines, TranSynd Automatic Transmission Fluid, and Water Oil Heat Exchange. Also includes features that monitor the transmission fluid, filter and clutch condition. Will display percent life remaining for the transmission fluid, filter and clutches on the shift selector. This information may be displayed using the Mode and Up and Down buttons. A wrench icon will also be included to indicate when the transmission fluid, filter or clutches need servicing. (Suited for vehicles operating on/off highway and/or requiring PTO operation) Forward Ratios: 1st-3.49, 2nd-1.86, 3rd-1.41, 4th-1.00, 5th-0.75, 6th-0.65 / Reverse Ratios: DR-(5.03)	110
1710 HD Driveline, 1 Midship Bearing	0
Allison FuelSense Not Desired	0
Auto Neutral Activates With Parking Brake	0
Allison 6-Speed Configuration, Close Ratio Gears 3000 Series Transmissions	0
Dash Mounted Push Button Shifter Available with Allison Transmissions.	0

Air & Trailer Equipment

Bendix AD-IS Air Dryer W/Heater And Coalescing Filter	0
Pull Cords All Air Tanks	0
Nylon Chassis Hose	0
Steel Painted Air Tanks All air tanks are steel with painted finish except when Code 4543330 Polish Aluminum Air Tanks is also selected (then exposed air tanks outside the frame rails will be polished aluminum). Peterbilt will determine the optimal size and location of required air tanks. Narratives requesting a specific air tank size or location will not be accepted for factory installation. See ECAT to determine number or location of air tanks installed.	0
Clear Outside Frame of All Air System Components LH BOC	0
Clear Outside Frame of All Air System Components RH BOC	0
Horizontal A&E Mounting Bar	4
Addl A&E Lines EOF, W/Diversion Valve N46140 OAR502537	0
Trailer Hand Valve With Column-Mounted Controls	11
12ft A&E Lines Coiled & Two 7-Way Plugs BOC/BOS socket	8
A&E Connections BOC/BOS with Hose Tenna	28

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	4/10/2018 4:13:46 PM	Incomplete	Model Number:	Model 337
Effective Date:	Jan 1, 2018		Quote/DTPO/CO:	Q61350398
Prepared by:	Chris Taylor		Version Number:	36.10



	Description	Weight
Tires & Wheels	FF: BR 14Ply 11R22.5 R283A Ecopia	-4
	RR: BR 14ply 11R22.5 M726ELA	60
	Code-rear Tire Qty 04	0
	FF: Accu-Lite Steel Armor 51408PK 22.5X8.25	0
	PHP10-2 hand holes	
	RR: Accu-Lite Steel Armor 51408PK 22.5X8.25	0
	PHP10-2 hand holes	
	Code-rear Rim Qty 04	0
	Accuride Black Wheels IPO White	0
Fuel Tanks	23in Aluminum 50 Gallon Fuel Tank RH BOC	-126
	Paddle handle filler cap with threadless filler neck. Top draw fuel plumbing reduces chance of introducing air into the fuel system during low fuel level conditions due to the central placement of fuel pickup tube. Wire braid fuel lines increase durability & reduce potential for leaks.	
	Location RH BOC 50 Gallon	0
	DEF Tank Mounted LH BOC	0
	Models 210, 220 and 320 mounted LH cab fender.	
	Standard DEF To Fuel Ratio 2:1 Or Greater	0
	DEF Tank Small	0
Battery Box & Bumper	Aluminum Battery Box LH Under Cab, Non-Slip Step	-55
	Includes diamond pattern block shaped cover in traditional/vocational models and a smooth finish tapered cover on aerodynamic models.	
	Rubber Battery Pad In Bottom Of (1) Battery Box	2
	Mat in box that holds batteries only	
	Heavy Duty Battery Box Step Reinforcement	2
	Aftertreatment RH U/C ALUMINUM Non-Slip Cab Entry	0
	Step. DPF/SCR for diesel engines, catalyst for natural gas engines. On Models 579 specifying chassis fairings, the box will be aerodynamic.	
	Steel Styled Aero Bumper Painted Black	0
	2 Tow pins	
Cab & Equipment	Alum Cab 110in BBC Metton Hood	0
	With bright finish crown. Includes view window RH door and convex mirror over RH door.	
	Peterbilt UltraRide Driver Seat	0
	Peterbilt UltraRide Passenger Seat	0
	Seat Skirt - All Eligible Air Seats	2

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	4/10/2018 4:13:46 PM	Incomplete	Model Number:	Model 337
Effective Date:	Jan 1, 2018		Quote/DTPO/CO:	Q61350398
Prepared by:	Chris Taylor		Version Number:	36.10



Description	Weight
Drivers Armrests - LH & RH	4
Required in Model 587 with Evolution LX seats, optional with Evolution ST and Rolltek Seats.	
Passenger Armrest - LH only	2
Required with Evolution LX seats, optional with Evolution ST Seats.	
Black Seat Color ipo Standard Color	0
Air Ride Driver	0
High Back Driver	0
Vinyl Driver	0
Air Ride Passenger	43
Low Back Passenger	0
Vinyl Passenger	0
Adjustable Steering Column - Tilt/Telescope	11
Steering Wheel with Peterbilt Logo	0
Steering Wheel with embossed Peterbilt logo over horn button.	
Interior Grey/Black	0
Includes rugged charcoal instrument panels, glare-resistant gray dash, black bezels on gauges, (2) power ports, monochromatic molded door pads with durable in-mold color, gray molded back wall, 18 inch 4-spoke soft-touch steering wheel, soft-touch steering column cover, power lift passenger window, extruded rubber floor covering, header-mounted dome light, foot well lighting, integrated "dead pedal", (4) inside entry grab handles, (2) inside sunvisors, (2) coat hooks, (2) cup holders and map bin in dash.	
Dark Window Tint ipo STD Tint - Day Cab	0
Extended Rear Window ipo Std Window-Day Cab	0
The extended rear window protrudes two inches more than the standard conventional rear cab window. Take this into consideration when determining your loadspace.	
Day Cab Rear Window	0
One Piece Curved Windshield	0
Combo Fresh Air Heater/Air Conditioner	0
With radiator mounted condenser, dedicated side window defrosters, Bi-Level Heater/Defroster Controls, 54,500 BTU/HR, and silicone heater hoses.	
Cup Holder (Floor Mounted)	4
Includes two standard-size drink holders and one extra-large jugholder, coin tray, and clipboard-size storage area.	
Peterbilt Comfort Control - Cab	6
Outside Sunvisor - Painted Composite	0
Available for High- Roof Sleepers.	
Mirrors SSTL Each Side Heated and Motorized	2
with Switch on Door. Right Click on option to See Picture in Product Portfolio.	

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed:	4/10/2018 4:13:46 PM	Incomplete	Model Number:	Model 337
Effective Date:	Jan 1, 2018		Quote/DTPO/CO:	Q61350398
Prepared by:	Chris Taylor		Version Number:	36.10



Description	Weight
(2) Convex 8 Inch SS Mirrors Center mounted under mirror bracket. If rear view mirrors are heated, the convex mirrors will be heated. Option includes dual door stops.	4
Power Package Includes power door locks and power windows.	0
(1) Air Horn 15in Painted Mounted under cab.	8
Standard Speaker Package For Cab (2) Speakers	4
ConcertClass Without CD, Includes BT Phone and Audio, AM/FM, WB, USB and MP3.	10
Plug-In Auto Reset Circuit Breaker in place of fuses in junction box.	0
Peterbilt Electric Windshield Wipers With Intermittent Feature.	0
Unibilt Cab Air Suspension Includes dual air bag suspension, leveling valve, and tracking rod.	25
Triangle Reflector Kit Shipped Loose	13
Fire Extinguisher; Cab Mounted Hazmat approved UL listed/rated ABC.	8
Backup Alarm (107dB)	3
Main Transmission Oil Temperature Gauge Located in Driver Information Display	0
Air Restriction Indicator Mounted on air cleaner, intake piping, or firewall.	0
Buzzer On Air Suspension Dump Valve Requires dash mounted dump valve (1922260)	0
Main Instrumentation Panel, Graphics Display Includes speedometer with trip odometer, tachometer with hourmeter and outside air temperature display, voltmeter, engine oil pressure, engine coolant temperature, fuel level, primary and secondary air pressure gauges. Includes standard warning light package: high water temperature, low oil pressure, and low air pressure warning lights w/audible alarms, high beam, turn signal, low fuel, parking brake, and ice warning indicators; seat belt reminder; rocker switches with long-life LED indicators; multi-function turn stalk with flash-to-pass feature (night mode flashes headlights and marker lights; day mode flashes headlights only), intermittent windshield wiper and headlamp beam control. Hydraulic braked trucks do not include air pressure gauges.	0
Headlights Composite Fender Mounted Integral Park, Turn, and Side Marker	0
(5) Marker Lights, Aero LED Light Emitting Diodes	0
(2) Peterbilt Fog Lights Recessed in bumper	6

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 4/10/2018 4:13:46 PM
Effective Date: Jan 1, 2018
Prepared by: Chris Taylor

Incomplete

Model Number: Model 337
Quote/DTPO/CO: Q61350398
Version Number: 36.10



	Description	Weight
	Daytime Running Lights (Required on Canadian units)	0
	(2) Addl Dome/Reading Lights, Ceiling Mounted	0
	LED Stop/Turn/Tail/Backup Bracket mounted LH/RH EOF	2
	Additional LED Round Turn Signal Mirror Mounted	2
	(2) Load Lights, Flush Mounted Low Outboard Loc B	4
Paint		
	Standard Paint Color Selection	0
	(1) Color Axalta Two Stage - Cab/Hood	0
	Base Coat/Clear Coat	
	N85020 A - L0006EY WHITE	
	N85400 HOOD TOP L0006EY WHITE	
	N85500 CAB ROOF L0006EY WHITE	
	N85200 FRAME N0001EA BLACK	
	N85700 BUMPER N0001EA BLACK	
	N85300 FENDER L0006EY WHITE	
Options Not Subject To Discount		
	Peterbilt Class 7 Standard Coverage 1 year/Unlimited Miles/km	0
	PACCAR PX-9 Standard Coverage 2 yrs/250,000 mi (402,336 km)/6,250 hrs	0
Miscellaneous		
	2017 EPA Emissions Engine Warranty Only	0
	Peterbilt NJPA Program Code	0
	Presentation Created Using Featured Spec For Model	0
Total Weight		11549

Prices and Specifications Subject to Change Without Notice.

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 4/10/2018 4:13:46 PM
Effective Date: Jan 1, 2018
Prepared by: Chris Taylor

Incomplete

Model Number: Model 337
Quote/DTPO/CO: Q61350398
Version Number: 36.10




Coast Counties Peterbilt C506
7675 Conde Lane

Lake County Sheriff's Office
4913 Helbush Drive

Windsor, California United States 95492
Phone: (707) 837-2727
Fax: (707) 837-0589
Email: ctaylor@coastcounties.com

Lakeport, California United States 95453
Phone: (707) 262-4228
Fax: (707) 262-4220
Contact Email: gavin.wells@lakecountyca.org
Prepared for: Gavin Wells

Horizontal Dimensions

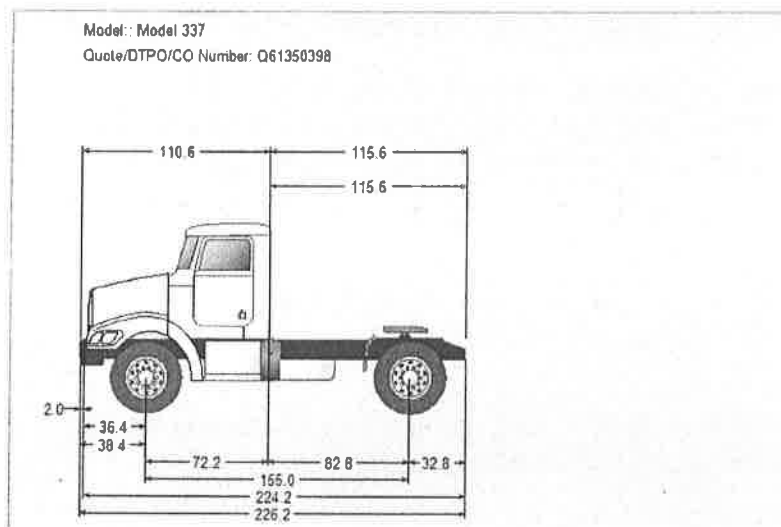

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 4/10/2018 4:14:09 PM
Effective Date: Jan 1, 2018
Prepared by: Chris Taylor

Incomplete

Model Number: Model 337
Quote/DTPO/CO: Q61350398
Version Number: 36.10




Coast Counties Peterbilt C506
7675 Conde Lane

Lake County Sheriff's Office
4913 Helbush Drive

Windsor, California United States 95492
Phone: (707) 837-2727
Fax: (707) 837-0589
Email: ctaylor@coastcounties.com

Lakeport, California United States 95453
Phone: (707) 262-4228
Fax: (707) 262-4220
Contact Email: gavin.wells@lakecountyca.org
Prepared for: Gavin Wells

Fuel Tanks

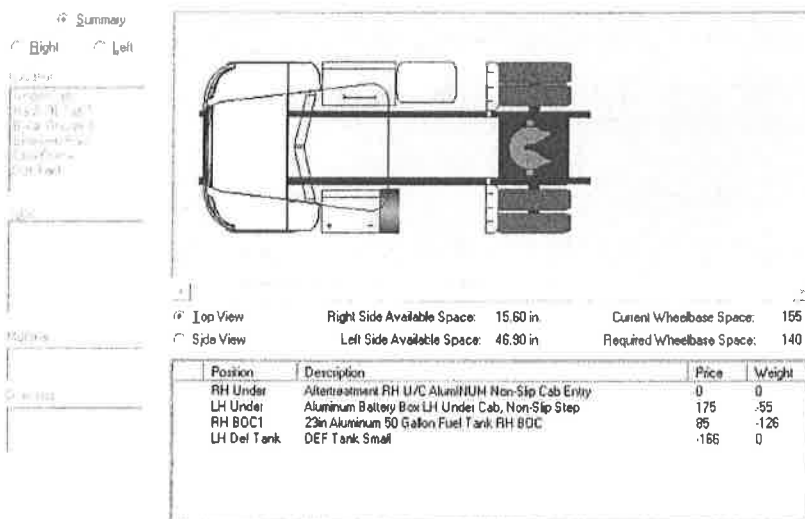

Unpublished options may require review/approval.

Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 4/10/2018 4:14:17 PM
Effective Date: Jan 1, 2018
Prepared by: Chris Taylor

Incomplete

Model Number: Model 337
Quote/DTPO/CO: Q61350398
Version Number: 36.10



Coast Counties Peterbilt C506
7675 Conde Lane

Lake County Sheriff's Office
4913 Helbush Drive

Windsor, California United States 95492
Phone: (707) 837-2727
Fax: (707) 837-0589
Email: ctaylor@coastcounties.com

Lakeport, California United States 95453
Phone: (707) 262-4228
Fax: (707) 262-4220
Contact Email: gavin.wells@lakecounttyca.org
Prepared for: Gavin Wells

Cruise Performance

Configuration: Model 337 / Tractor / Van GCW: 53000
Quote/DTPO/CO Number: Q41450211
Aerodynamic Aids: None

Engine: 2074507 PACCAR PX-9 370@1900 GOV@2100 1250@1400
Transmission: 4052110 Allison 3000 RDS-P Transmission, Gen 5
Rear Axle: 1513160 Dana Spicer S21-170 21,000 lb 4.78 Ratio
Rear Tire: 5166610 RR: BR 14ply 11R22.5 M726ELA Revs/Mile: 492

Operating Conditions: 0.7% Rolling Resistance, Engine Fan: Off

Startability:

Transmission Ratio	Maximum Starting Grade (%)
3.49	8.40
1.86	4.20

Engine RPM:	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100
Gross Torque:	1100	1200	1250	1250	1200	1143	1080	1023	972	914
Net Torque:	999	1094	1142	1143	1098	1046	988	936	890	836
Net HP:	228	271	304	327	334	339	339	339	339	334

Gear Ratios: TRN:(1)	3.49	RAX:(1)	4.78							
Speed (MPH):	8.8	9.5	10.2	11.0	11.7	12.4	13.2	13.9	14.6	15.4
Grade (%):	18.0	19.8	20.8	20.8	19.9	18.9	17.8	16.8	15.9	14.9

Gear Ratios: TRN:(2)	1.86	RAX:(1)	4.78							
Speed (MPH):	16.5	17.8	19.2	20.6	21.9	23.3	24.7	26.1	27.4	28.8
Grade (%):	9.1	10.1	10.6	10.6	10.1	9.6	9.0	8.5	8.1	7.5

Gear Ratios: TRN:(3)	1.41	RAX:(1)	4.78							
Speed (MPH):	21.7	23.5	25.3	27.1	29.0	30.8	32.6	34.4	36.2	38.0
Grade (%):	6.8	7.5	7.8	7.8	7.5	7.1	6.7	6.3	5.9	5.5

Gear Ratios: TRN:(4)	1.00	RAX:(1)	4.78							
Speed (MPH):	30.6	33.2	35.7	38.3	40.8	43.4	45.9	48.5	51.0	53.6
Grade (%):	4.6	5.1	5.3	5.3	5.1	4.8	4.5	4.2	4.0	3.7

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 4/10/2018 4:19:46 PM
Effective Date: Jan 1, 2018
Prepared by: Chris Taylor

Incomplete

Model Number: Model 337
Quote/DTPO/CO: Q41450211
Version Number: 36.10



Gear Ratios: TRN:(5) 0.75 RAX:(1) 4.78
Speed (MPH): 40.8 44.2 47.6 51.0 54.4 57.8 61.2 64.6 68.0 71.4
Grade (%): 3.3 3.6 3.8 3.8 3.7 3.4 3.2 3.0 2.8 2.6

Gear Ratios: TRN:(6) 0.65 RAX:(1) 4.78
Speed (MPH): 47.1 51.0 55.0 58.9 62.8 66.7 70.7 74.6 78.5 82.4
Grade (%): 2.7 3.1 3.2 3.2 3.1 2.9 2.7 2.5 2.4 2.2

Engine RPM:	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100
Gross Torque:	1100	1200	1250	1250	1200	1143	1080	1023	972	914
Net Torque:	999	1094	1142	1143	1098	1046	988	936	890	836
Net HP:	228	271	304	327	334	339	339	339	339	334

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in PROSPECTOR.

Printed: 4/10/2018 4:19:46 PM
Effective Date: Jan 1, 2018

Incomplete

Model Number:
Quote/DTPO/CO:

Model 337
Q41450211

