

**COUNTY OF LAKE  
Planning Commission**



**THURSDAY, JULY 23, 2026**

**9:00 AM**

**AGENDA - Final**

Commissioner Monica Rosenthal District I  
Commissioner Everardo Chavez District II  
Commissioner Batsulwin Brown District III  
Commissioner Maile Field District IV  
Commissioner Sharron Zoller District V

Director Mireya G. Turner  
Deputy County Counsel Nicole Johnson  
P.C. Clerk Yolanda Claybon

---

**GENERAL INFORMATION**

The Planning Commission meets the second and fourth Thursday of each month, at 9:00 a.m. at 255 North Forbes Street, Lakeport, California. The meeting room is wheelchair accessible. A request for a disability-related modification or accommodation necessary to participate in the Planning Commission meeting should be made in writing to the Office Assistant III at least 48 hours prior to the meeting. Any person may speak for three minutes about any subject of concern, provided that it is within the jurisdiction of the Planning Commission and is not already on today's agenda or scheduled for a future public hearing. Speakers are requested to legibly write your name on the sign in sheet at the podium and state your name for the record.

Agendas of public meetings and supporting documents are available for public inspection in the Lake County Courthouse, Community Development Department, Third Floor, 255 North Forbes Street, Lakeport, CA.

**AGENDA AVAILABLE ONLINE AT [www.lakecountycalifornia.gov](http://www.lakecountycalifornia.gov)**

Meetings of the Lake County Planning Commission will be available for participation virtually via Zoom. Live video of all Planning Commission meetings are broadcast on Lake County PEG TV (TV8), and online, at <https://countyoflake.legistar.com/Calendar.aspx>. To submit a written comment on any agenda item, please visit site above and click on the eComment feature linked to the meeting date.

Join from a PC, Mac, iPad, iPhone or Android device:

<https://lakecounty.zoom.us/j/99417602765?pwd=aEdsUWtFMVJEQWFDRHNtT3V6cStSQT09>

Passcode: 155982

Or One tap mobile:

+16699006833,,99417602765#,,, \*155982# US (San Jose)

Or join by phone:

Dial (for higher quality, dial a number based on your current location):

US: +1-669-900-6833 or +1-669-444-9171

Webinar ID: 994 1760 2765

Passcode: 155982

---

To submit a written comment on any agenda item please visit:  
<https://countyoflake.legistar.com/Calendar.aspx>  
and click on the eComment feature linked to the meeting date.

**1. 9:00 AM - Call To Order**

**2. Pledge of Allegiance**

**3. Verification of Legal Notice**

**4. Consent Agenda**

Approve minutes from April 04, 2026, Planning commission Meeting

**Memo:** [26-0749](#)

**Attachments:** [04.09.26 minutes\\_MGT\\_APPROVED](#)

**5. Public Input**

**6. Timed Items - Public Hearings**

- 6a** Consideration of the proposed Tentative Subdivision (PL-26-9), Anasu Farms Subdivision, for eight phases, one encroachment from Butts Canyon Road, 34 new parcels (30 resort residential, 1 commercial, 3 facility) and six peripheral parcels (from 7 existing parcels and 3 access parcels), located among the 16,000-acre Guenoc Valley Site with the nearest property 21423 Butts Canyon Rd, Middletown (APNs: 014-320-08, 013-022-16, 013-022-17, 013-022-20, 013-022-21, 013-022-22, 013-022-23).

**Memo:** [26-0748](#)

**Attachments:** [Staff Report](#)  
[Tentative Subdivision](#)  
[Draft Conditions of Approval](#)  
[Agency Comments](#)

**7. Non-Timed Items**

**8. Department Update**

**9. Adjournment**





# COUNTY OF LAKE

255 North Forbes Street  
Lakeport, CA 95453

## Memorandum

---

7/23/2026

**Item#:**

---

**County of Lake  
Planning Commission  
Regular Meeting Minutes  
April 9, 2026**

**Commission Members**

P Monica Rosenthal, District I  
P Everardo Chavez, Vice Chair District II  
P Batsulwin Brown, District III  
P Maile Field, District IV  
P Sharron Zoller, Chair District V

**Staff Members**

P Mireya G. Turner, Director  
A Michelle Irace, Senior Planner  
P Nicole Johnson, Deputy County Counsel  
P Yolanda Claybon, Planning Technician

---

**9:00 a.m. -Call to Order**

Pledge of Allegiance was led by Chair Sharon Zoller.

**Verification of Legal Notice(s)**

The clerk reported that the item was properly noticed.

**Consent Agenda**

There was no consent agenda.

**Citizen’s Input**

There was no one present wishing to speak.

**Timed Items- Public Hearings**

**6a 9:05 a.m. Public Works Director Lars Ewing Presentation– County Public Works Road Program**

Chair Zoller opened the public hearing and the following people spoke: Tom Lajcik, Margaux Kambara, Angela Ameral and Donna Mackiewicz.

No one else wished to speak, and Chair Zoller closed the public hearing.

**This item was informational only. No action was taken.**

**Commissioner Zoller announced a break at 10:05 a.m and reconvened at 10:15 a.m.**

**6b 9:20 a.m. Public Hearing – Consideration of Major Use Permit PL-25-354 (UP 24-06) Osprey Farm / Alfred Fontana and subsequent Mitigated Negative Declaration for approval of 89,620 sf (2.05 acres) of outdoor commercial cannabis canopy located at 7255 Boggs Lane & 7314 Adobe Creek Road, Kelseyville (APNs 007-021-21 & 007-021-16)**

Senior Planner Mary Claybon presented the staff report.

Applicant, Al Fontana and applicant’s consultant Annje Dodd, delivered a presentation.

Chair Zoller opened the public hearing and the following people spoke: Kevin Boyd, CAL FIRE chief Paul Duncan, Dave Hughes, Joy Modecimio, Brian Ricebeck, Proje White and Donna Mackiewicz.

No one else wished to speak, and Chair Zoller closed the public hearing.

Senior Planner Claybon recommended amending the conditions of approval, adding condition J.4. within the hydrology and water quality section.

**Mitigated Negative Declaration 3 Ayes, 2 Noes**

On motion of Commissioner Chavez, and 2<sup>nd</sup> by Commissioner Brown found that potential impacts associated with Major Use Permit PL-25-354 (UP 24-06) for Osprey Farm, (Al Fontana) for the property located at 7255 Boggs Lane & 7314 Adobe Creek Road, Kelseyville (APNs 007-021-21 & 007021-16) can be mitigated to 'less than significant' through the implementation of the Mitigated Negative Declaration Initial Study (PL 25-354), and adopted Initial Study (PL-25-354) with the findings listed in the staff report, dated April 9, 2026.

**Major Use Permit PL-25-354 (UP 24-06) 3 Ayes, 2 Noes**

On motion of Commissioner Chavez, and 2<sup>nd</sup> by Commissioner Brown approved the Major Use Permit PL-25-354 (UP 24-06) as amended for Osprey Farm (Al Fontana) located at 7255 Boggs Lane & 7314 Adobe Creek Road, Kelseyville (APNs 007-021-21 & 007021-16) based on the findings and subject to the conditions included in the staff report, dated April 9, 2026.

**Commissioner Zoller announced a break at 11:35 a.m. and reconvened at 11:45 a.m.**

**6c 11:45 a.m. Public Hearing – Consideration of Proposed Major Use Permit PL-25-492 (UP 23-10), Clearpath Canyon LLC/ Brian Pensack and Garrett Burdick and Mitigated Negative Declaration (IS 23-21), for the approval of 653,400 sf (15 acres) of outdoor commercial cannabis cultivation and a Type 13 distributor, Self Transport license located at 2050 and 2122 Ogulin Canyon Road, Clearlake (APNs 010-053-01 and 010-053-02)**

Associate Planner Trish Turner presented the staff report.

Applicant's consultant, Annje Dodd, delivered a presentation.

**Commissioner Zoller announced a lunch break at 12:30 p.m. and reconvened at 1:30 p.m.**

Consultant Annje Dodd continued presentation.

Chair Zoller opened the public hearing, and the following people spoke Dave Hughes, Richard Knoll, and Commissioner Everardo Chavez read a public comment from Norman Grimm.

No one else wished to speak, and Chair Zoller closed the public hearing.

Associate Planner Turner stated that the wildfire section 1 through 6 within the conditions of approval were inadvertently omitted and requested to amend the conditions of approval to include the wildfire mitigations.

**Mitigated Negative Declaration 5 Ayes, 0 Noes**

On motion of Commissioner Chavez, and 2<sup>nd</sup> by Commissioner Brown found that potential impacts associated with Major Use Permit PL-25-492 (UP 23-10) for Clearpath Canyon LLC (Brian Pensack and Garrett Burdick) located at 2050 and 2122 Ogulin Canyon Road, Clearlake (APNs 010-053-01 and 010-053-02) can be mitigated to 'less than significant' through the implementation of the Mitigated Negative Declaration (IS 23-21) and adopted Initial Study (IS 23-21) with the findings listed in the staff report, dated April 9, 2026.

**Major Use Permit PL-25-492 (UP 23-10) 5 Ayes, 0 Noes**

On motion of Commissioner Chavez, and 2<sup>nd</sup> by Commissioner Brown approved Major Use Permit PL-25-59 (UP 23-10) as amended, for Clearpath Canyon LLC (Brian Pensack and Garrett Burdick) located at 2050 and 2122 Ogulin Canyon Road, Clearlake (APNs 010-053-01 and 010-053-02) based on the findings and subject to the conditions included in the staff report, dated April 9, 2026.

**Non-Timed Items**

There were no non-timed items.

**Department Update**

Director Turner provided an update on Lake County 2050, and an update from the recent Board of Supervisors meeting regarding commercial cannabis regulations.

There being no further business, Chair Zoller adjourned at 2:38 p.m.

**Respectfully submitted,**

---

**Sharron Zoller, Chair**  
**Lake County Planning Commission**



## Memorandum

7/23/2026

Item#:6a

## Memorandum

**Date:** July 23, 2026

**To:** The Honorable Lake County Board of Supervisors

**From:** Mireya G. Turner, Community Development Department  
Michelle Irace, Senior Planner  
Max Stockton, Associate Planner

**Subject:** Consideration of the proposed Tentative Subdivision (PL-26-9), Anasu Farms Subdivision, for eight phases, one encroachment from Butts Canyon Road, 34 new parcels (30 resort residential, 1 commercial, 3 facility) and six peripheral parcels (from 7 existing parcels and 3 access parcels), located among the 16,000-acre Guenoc Valley Site with the nearest property 21423 Butts Canyon Rd, Middletown (APNs: 014-320-08, 013-022-16, 013-022-17, 013-022-20, 013-022-21, 013-022-22, 013-022-23).

**Executive Summary:**  
**Action Requested:**

The Planning Commission will consider approval of the proposed Tentative (PL-26-9), Anasu Farms Subdivision, for eight phases, one encroachment from Butts Canyon Road, 34 new parcels (30 resort residential, 1 commercial, 3 facility) and six peripheral parcels (from 7 existing parcels and 3 access parcels), located among 16,000-acre Guenoc Valley Site with the nearest property 21423 Butts Canyon Rd, Middletown (APNs: 014-320-08, 013-022-16, 013-022-17, 013-022-20, 013-022-21, 013-022-22, 013-022-23).

**Background:**

The Guenoc Valley Mixed Use Planned Development Project (Guenoc Project) was approved by the Lake County Planning Commission and the Board of Supervisors through several actions between August and September of 2025. The Guenoc Project includes the development of a master planned mixed-use resort and residential community within a portion of the Guenoc Valley Ranch property (Guenoc Valley Site or Project Site). The Guenoc Project includes a General Plan amendment to designate the 16,000-acre Guenoc Valley Site as Resort Commercial and rezone to Guenoc Valley District (GVD). At full buildout, throughout multiple phases, the Guenoc Project would allow for the development of up to 400 hotel rooms, 450 resort residential units, 1,400 residential estates, and 500

workforce co-housing units within the zoning district. Phase 1 of the Guenoc Project includes the phased subdivision (four subdivisions total) and related entitlements to allow up to 385 residential villas, 141 resort residential units, 147 hotel units, and accessory resort and commercial uses. Figure 1 provides an overview of the approved Specific Plan for the Guenoc Project.

The applicant (Kevin Case and Lotusland Investment Holdings, Inc.) proposes Anasu Farms Tentative Subdivision (PL-26-9) as the first phased subdivision proposed for development under Phase 1 of the Guenoc Project (Figure 2 provides a location map).

### **Recommended Action:**

#### **Staff recommends the Planning Commission:**

1. Find that the proposed Tentative Subdivision (PL-26-9), Anasu Farms Subdivision, was adequately analyzed under the California Environmental Quality Act within the Programmatic EIR for the Guenoc Mixed-Use Planned Development Project (SCH No. 2019049134), and no further analysis is required.
2. Find that the Tentative Subdivision PL-26-9, Anasu Farms Subdivision, for eight phases, one encroachment from Butts Canyon Road, 34 new parcels (30 resort residential, 1 commercial, 3 facility) and six peripheral parcels (from 7 existing parcels and 3 access parcels), applied for by Kevin Case Lotusland Investment Holdings, Inc. for the property located among 16,000-acre Guenoc Valley Site with the nearest property 21423 Butts Canyon Rd, Middletown (APNs: 014-320-08, 013-022-16, 013-022-17, 013-022-20, 013-022-21, 013-022-22, 013-022-23) is in conformity with the provisions of the Subdivision Map Act and Chapter 17 of the Lake County Code, and upon that basis approve said map as modified, subject to the conditions and with the findings listed in the staff report dated July 23, 2026.

### **SAMPLE MOTIONS**

1. I move that the Planning Commission find that the proposed Tentative Subdivision (PL-26-9), Anasu Farms Subdivision, was adequately analyzed under the California Environmental Quality Act within the Programmatic EIR for the Guenoc Mixed-Use Planned Development Project, and no further analysis is required.
2. I move that the Planning Commission find that the Tentative Subdivision Map (PL-26-9) applied for by Kevin Case and Lotusland Investment Holdings, Inc. on properties located at 21423 Butts Canyon Rd, Middletown (APNs: 014-320-08, 013-022-16, 013-022-17, 013-022-20, 013-022-21, 013-022-22, 013-022-23) meet the requirements of the Subdivision Map Act and Chapter 17 of the Lake County Municipal Code and that the Tentative Subdivision Map be granted based on the findings and subject to the conditions included in the staff report dated July 23, 2026.

---

7/23/2026

Item#:6a

---



COUNTY OF LAKE  
COMMUNITY DEVELOPMENT DEPARTMENT  
255 N. Forbes Street – 3<sup>rd</sup> Floor  
Lakeport, California 95453  
Planning • Building • Code Enforcement  
Phone: (707) 263-2221 • Fax: (707) 263-2225

Item 6a  
9:05 AM  
July 23, 2026

**TO:** Planning Commission

**FROM:** Mireya G. Turner, Community Development Department  
Michelle Irace, Senior Planner  
Max Stockton, Associate Planner

**DATE:** July 23, 2026

**SUBJECT:** Consideration of the proposed Tentative Subdivision (PL-26-9), Anasu Farms Subdivision, for eight phases, one encroachment from Butts Canyon Road, 34 new parcels (30 resort residential, 1 commercial, 3 facility) and six peripheral parcels (from 7 existing parcels and 3 access parcels), located among the 16,000-acre Guenoc Valley Site with the nearest property 21423 Butts Canyon Rd, Middletown (APNs: 014-320-08, 013-022-16, 013-022-17, 013-022-20, 013-022-21, 013-022-22, 013-022-23).

---

## EXECUTIVE SUMMARY

### Action Requested:

The Planning Commission will consider approval of the proposed Tentative (PL-26-9), Anasu Farms Subdivision, for eight phases, one encroachment from Butts Canyon Road, 34 new parcels (30 resort residential, 1 commercial, 3 facility) and six peripheral parcels (from 7 existing parcels and 3 access parcels), located among 16,000-acre Guenoc Valley Site with the nearest property 21423 Butts Canyon Rd, Middletown (APNs: 014-320-08, 013-022-16, 013-022-17, 013-022-20, 013-022-21, 013-022-22, 013-022-23).

### Background:

The Guenoc Valley Mixed Use Planned Development Project (Guenoc Project) was approved by the Lake County Planning Commission and the Board of Supervisors through several actions between August and September of 2025. The Guenoc Project includes the development of a master planned mixed-use resort and residential community within a portion of the Guenoc Valley Ranch property (Guenoc Valley Site or Project Site). The Guenoc Project includes a General Plan amendment to designate the 16,000-acre Guenoc Valley Site as Resort Commercial and rezone to Guenoc Valley District (GVD). At full buildout, throughout multiple phases, the Guenoc Project would allow for the development of up to 400 hotel rooms, 450 resort residential units, 1,400 residential estates, and 500 workforce co-housing units within the zoning district. Phase 1 of the Guenoc Project includes the phased subdivision (four subdivisions total) and related entitlements to allow up to 385 residential villas, 141 resort residential units, 147 hotel units, and accessory resort and commercial uses. Figure 1 provides an overview of the approved Specific Plan for the Guenoc Project.

The applicant (Kevin Case and Lotusland Investment Holdings, Inc.) proposes Anasu Farms Tentative Subdivision (PL-26-9) as the first phased subdivision proposed for development under Phase 1 of the Guenoc Project (Figure 2 provides a location map).



Figure 1 – Approved Guenoc Project Specific Plan


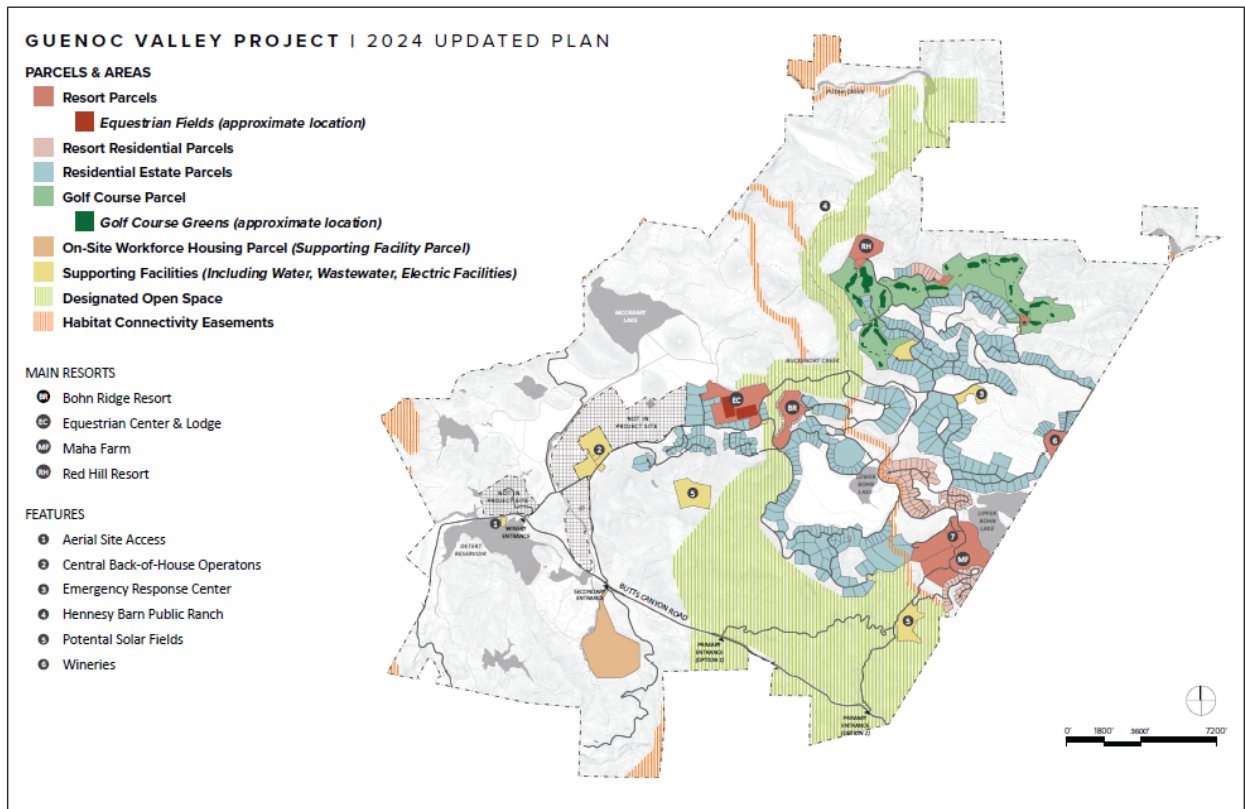


Figure 2 – Location of Proposed Anasu Farms TM

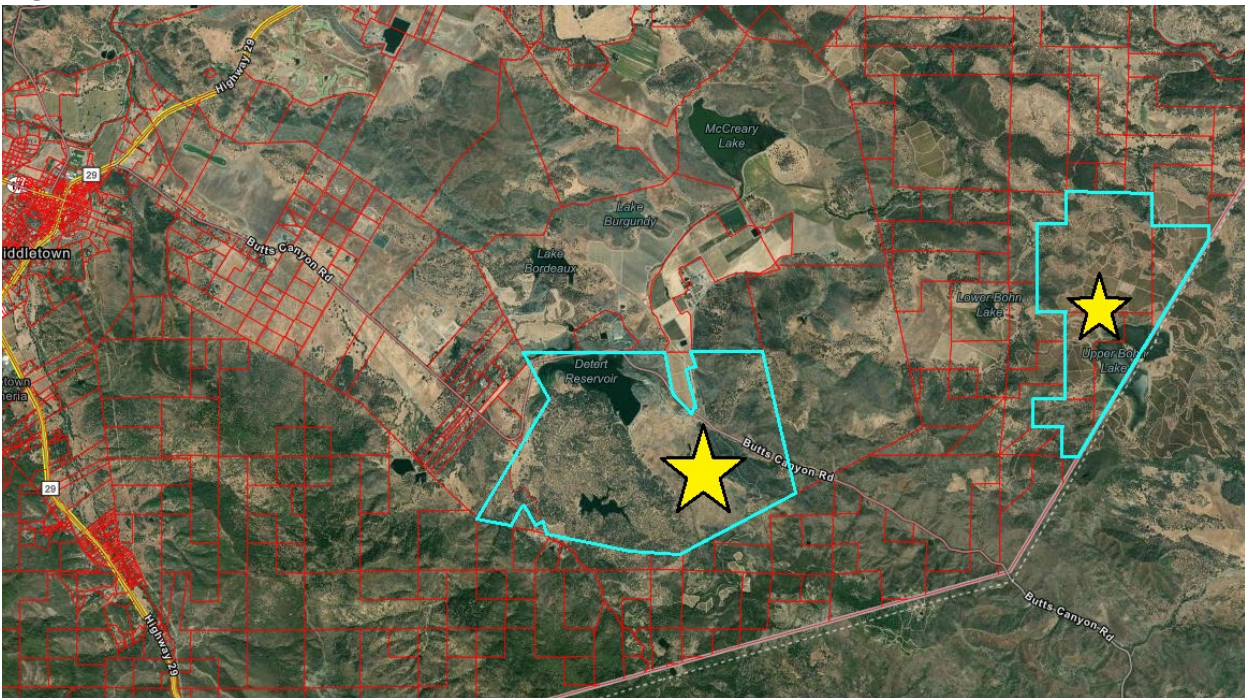


## PROJECT SUMMARY

The proposed Anasu Farms Tentative Subdivision (PL-26-9) is the first phased subdivision proposed for development under Phase 1 of the Guenoc Project, and includes the following.


- 8 phases, as shown in Figures 3 and 4 below
- 34 new parcels (30 resort residential, 1 commercial, 3 facility)
- 6 peripheral parcels<sup>1</sup> from 7 existing parcels and 3 access parcels
- Road infrastructure, including a new access road from Butts Canyon (Road 1A) and a connector road through the subdivision (Road 1C) with one ancillary street
- Water reclamation facility (WRF)
- Electrical substation
- Fire suppression tanks

**Figure 3—Ansu Farms Subdivision Map (refer to complete plan set in Attachment 1)**

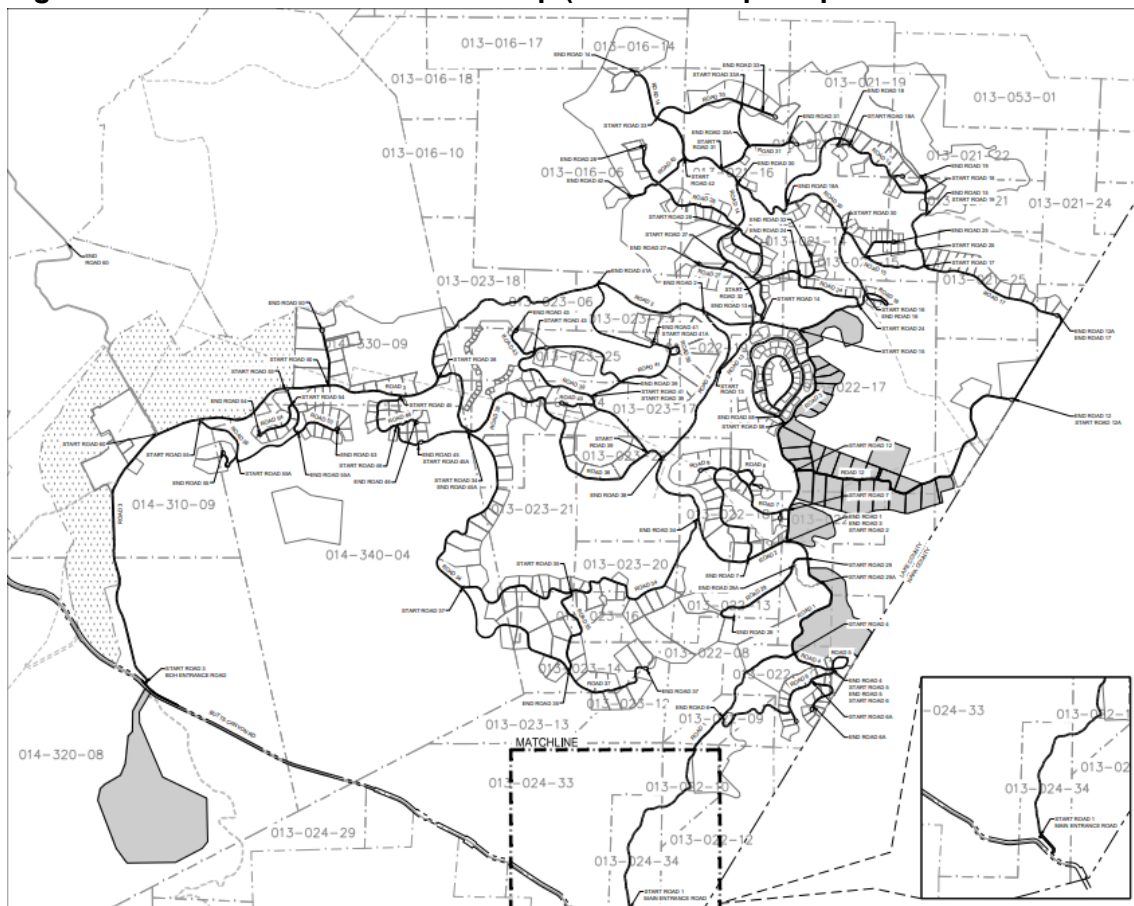

<sup>1</sup> Peripheral parcel refers to a lot or tract located on the edge or outer boundary of a subdivided area, rather than in the central or core section.

**FIGURE 4- Ansu Farms Subdivision Phased Plan**

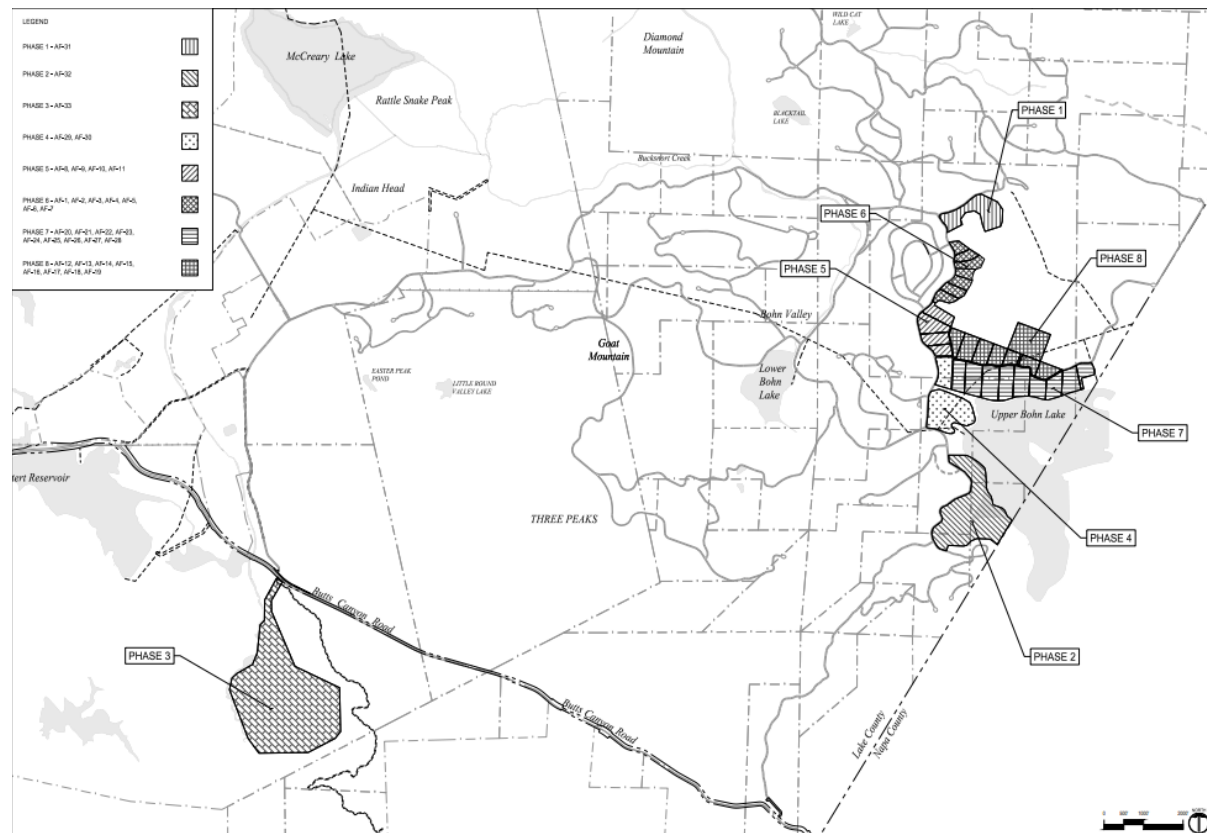

Source: Realm Engineering, 2026

## SITE CONTEXT

Location: Guenoc Valley Site with the nearest property 21423 Butts Canyon Rd, Middletown (APNs: 014-320-08, 013-022-16, 013-022-17, 013-022-20, 013-022-21, 013-022-22, 013-022-23).

- General Plan: “CR-Rc”- Resort Commercial, Resource Conservation. See Figure 5 below
- Zoning: “GVD-WW-AP-FF-OSP-SC” Guenoc Valley Zoning District- Waterway Combining-Agriculture Preserve-Floodway Fringe- Open Space Preserve- Scenic Combining District. See Figure 6 below
- Guenoc Valley Site: combined  $\pm 3,248$ -acres
- Access: Butts Canyon Road and new connector roads

The Guenoc Valley Site parcels are currently developed with over 1,000 acres of vineyards and approximately 72 miles of existing roadways, overland water pipelines and associated pumps, and accessories to move water from the five irrigation reservoirs.


The Guenoc Valley Site is bordered by rural and agricultural lands that have a mix of dry grazing lands, vineyards, and irrigated pastures. The closest edge of the Hidden Valley Lake Community is approximately one mile northwest of the Guenoc Valley Site boundary, and the Middletown




Community is approximately six miles west. Napa County borders the site to the south and east, and Yolo County is approximately five miles northeast of the closest edge of the Guenoc Valley Site boundary.

As shown in the above figures, the proposed Anasu Farms Subdivision is located within the southeastern portion of the Guenoc Valley Site.

**FIGURE 5- General Plan Map**

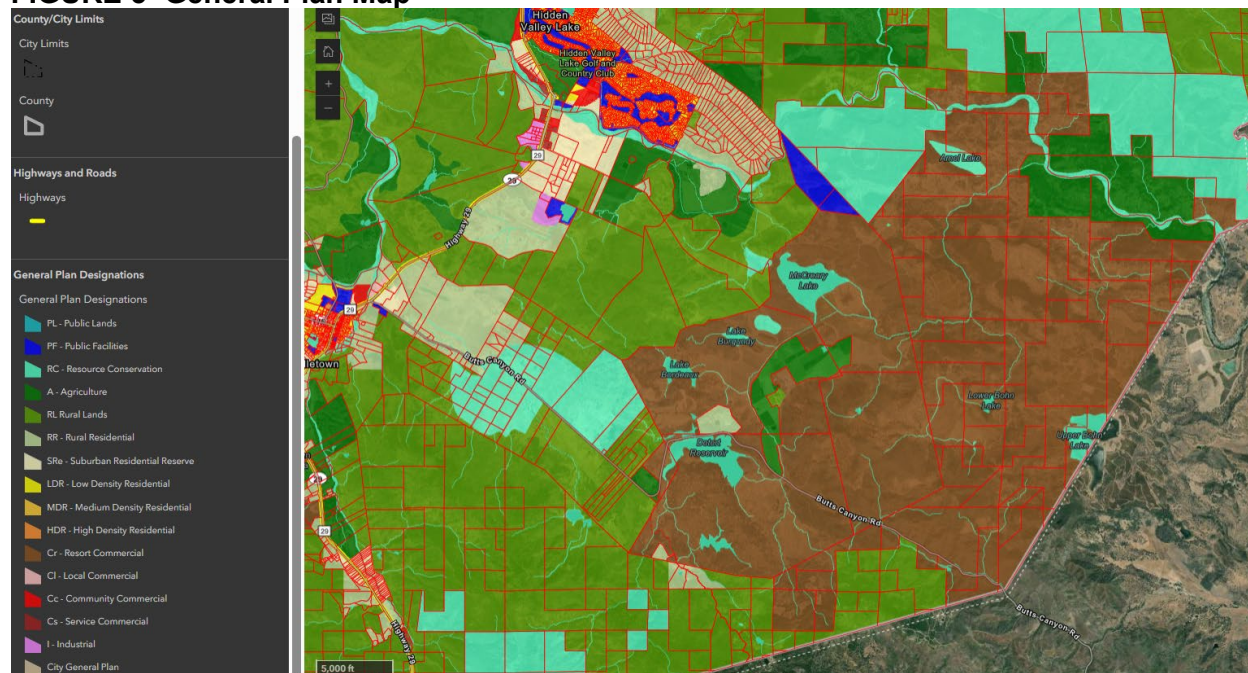

**FIGURE 6- Zoning Map**

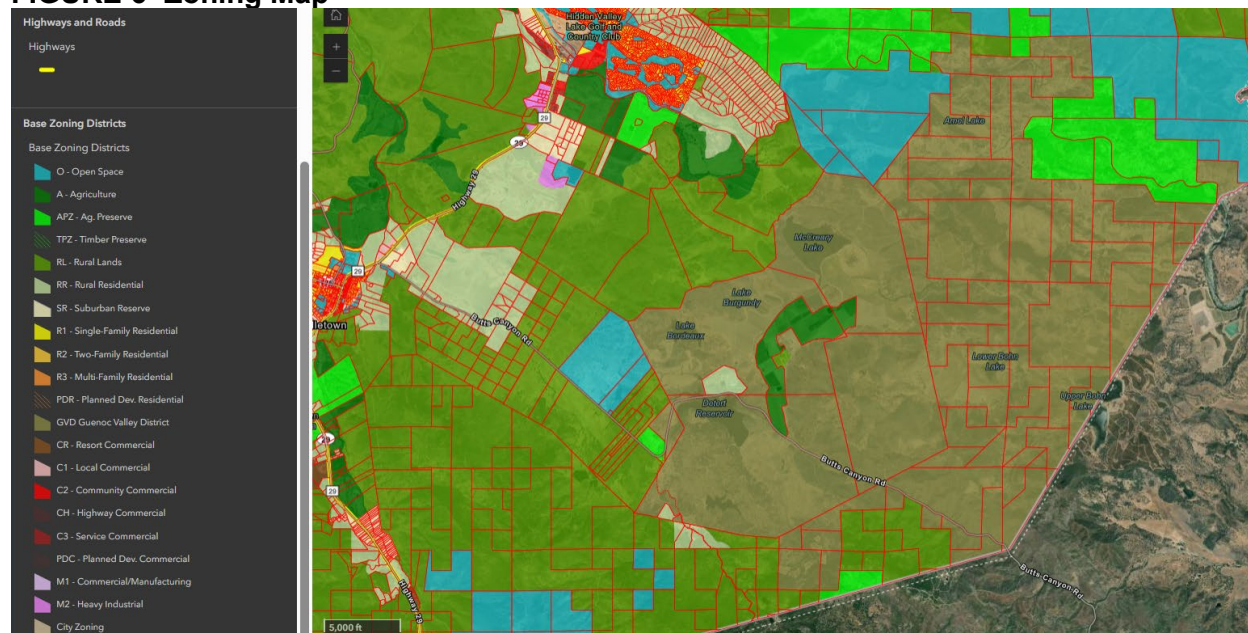

## ENVIRONMENTAL REVIEW (CEQA)

A Programmatic Environmental Impact Report (PEIR; [SCH No. 2019049134](#)) in compliance with the California Environmental Quality Act (CEQA) for the Guenoc Valley Mixed Use Planned Development Project was certified by the Lake County Planning Commission on August 8, 2025. The PEIR, which comprises the [Draft Partially Revised PEIR \(March 2025\)](#) and [Final Partially Revised PEIR \(July 2025\)](#) addresses the CEQA adequacy issues identified by the Superior Court with regard to the [2020 PEIR's](#) analysis, and analyzes the effects of the Guenoc Project (as modified) at a programmatic level and a project level. A Statement of Overriding Considerations for Significant and Unavoidable impacts identified in the PEIR (Aesthetics, Agriculture, Greenhouse Gas Emissions, Noise and Traffic) and Findings of Fact were adopted by the Planning Commission on August 8, 2025. More information related to the project history and CEQA may be found on the Guenoc Project website online at: [Guenoc Valley Mixed-Use Planned Development Project | Lake County, CA](#).

A detailed description of the Phase 1 project is included in Section 2.0 (Project Description) of the 2020 PEIR and in Section 2 (Project Modifications) of the Draft Partially Revised PEIR (2025). Phase 1 includes approval of a Use Permit for the General Plan of Development and Specific Plan of Development, and Phased Tentative Subdivision Maps (Appendix E of the Draft Partially Revised PEIR). Phase 1 includes the phased subdivision and related entitlements to allow up to 385 residential villas, 141 resort residential units, 147 hotel units, and accessory resort and commercial uses (refer to Draft Partially Revised PEIR Table 2.2-2: Phase 1 Unit Counts, Modified Project Compared to Original Project). In addition, Phase 1 includes a subdivision and rezoning of an off-site parcel (Middletown Housing Site) to accommodate 21 single family residences with optional accessory dwelling units, 29 duplex units in 15 structures, and a community clubhouse and associated infrastructure. Other off-site infrastructure improvements under Phase 1 analyzed include a proposed water supply well on an off-site parcel (Off-Site Well Site) and pipeline located adjacent to and within Butts Canyon Road, along with intersection and electrical transmission line improvements (collectively referred to as 'Off-Site Improvements'). Lastly, the analysis for the Phase 1 the Development Area also includes grading and vegetation clearing for a minimum of 50 feet of width on either side of roadways to encompass the potential fuel reduction zone as described in the Updated Wildfire Prevention Plan, as well as an analysis of the construction and operation of the utilities and roads for the aforementioned.

Impacts related Phase 1 (including the subdivisions) are analyzed within each of the CEQA resource category discussions throughout Section 4 of the Draft Partially Revised PEIR (and Section 3 of the 2020 PEIR). A summary of impacts and mitigation measures is included in Draft Partially Revised PEIR Table ES-1: Summary of Impacts and Mitigation Measures. In accordance with CEQA Guidelines Section 15168, no additional CEQA is required for the proposed Anasu Farms Subdivision, because it was fully analyzed in the PEIR under the Phase 1 analysis. All applicable Conditions of Approval and Mitigation Measures from the PEIR are incorporated into the Anasu Farms Subdivision Conditions of Approval (Attachment 2).

## GENERAL PLAN, COUNTY CODE, & ZONING CONSISTENCY

The project (Anasu Farms Subdivision) was included in the approved Guenoc Project, and specifically the Phased 1 development, including a Use Permit for the General Plan of Development, Specific Plan of Development, and Phased Tentative Subdivision Maps. As demonstrated below, the project is consistent with the General Plan, Middletown Area Plan, Lake County Municipal Code, and Guenoc Valley Zoning District (GVD).

| Policy Area                                                      | Conclusion                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>General Plan</b>                                              | <p>Consistent with Chapter 3 Land Use; Chapter 7 Health and Safety; Chapter 8 Noise; and Chapter 11 Water Resources.</p> <p>As a part of the Guenoc Project, a General Plan &amp; Zoning Ordinance Amendment was approved that created a new land use designation (and zoning district), changing the Guenoc Valley Site to Resort Commercial (CR) for the Guenoc Valley District (“GVD”). Land use consistency was analyzed in Section 3.2 (Land Use and Agriculture; pg. 3.2-26) of the 2020 PEIR. The proposed Anasu Farms Subdivision is consistent with the Commercial Resort land use designation and approved uses of the GVD.</p>                                                                                             |
| <b>Middletown Area Plan</b>                                      | <p>The Guenoc Valley Resort is described in the <a href="#">Middletown Area Plan</a> as Special Study Area Number 3 and states that the goal of the area is to have a mix of resort/commercial, residential, and agricultural uses. The Guenoc Project also amended the Middletown Area Plan Special Study Area Number 3 map to include a portion of the site that was previously not included.</p> <p>Consistency with the Middletown Area Plan was analyzed in Section 3.2 (Land Use and Agriculture; pg. 3.2-28) of the 2020 PEIR. The Guenoc Project (including the Phase 1 subdivisions, such as the proposed Anasu Farms Subdivision) were found to be in compliance with the goals and intent of the Middletown Area Plan.</p> |
| <b>Zoning:<br/>Guenoc Valley<br/>Zoning District –<br/>(GVD)</b> | <p>The <a href="#">GVD zoning district</a> was specifically created for the Guenoc Project, including the Phase 1 subdivisions and development. The GVD establishes allowed and permitted uses, as well as development standards. The <a href="#">Guenoc Valley Resort Phase 1 Design Guidelines</a> further stipulate development requirements for future development.</p> <p>As noted above in the Site Context section and shown in Figure 6, the properties included in the Anasu Farms Subdivision are zoned GVD, and contain several overlay districts.</p>                                                                                                                                                                     |



| Policy Area                                                               | Conclusion                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                           | No development is proposed at this time, but future development associated with the proposed Anasu Farms Subdivision will adhere to these regulations.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Chapter 17 –<br/>Subdivision of<br/>Lake County<br/>Municipal Code</b> | <p>All applicable portions of Section 17-6 – Tentative Map have been included in the proposed map. Per Section 17-8- Tentative Map; Completeness and Filing of the Subdivision Ordinance, the Planning Commission has the authority to determine if the subdivision is in conformity with the Subdivision Map Act and Chapter 17 of the Lake County Municipal Code.</p> <p>After approval of the Tentative Map, the developer has 24 months to submit Improvement Plans to the Department of Public Works and a Final Map for consideration by the County Surveyor, Planning Commission and Board of Supervisors (SEC 17-10 Final Map, et. Seq., of the Subdivision Ordinance).</p> <p><a href="#">Chapter 17 - SUBDIVISION REGULATION   Code of Ordinances   Lake County, CA   Municode Library</a></p> |

---

## AGENCY REVIEW & TRIBAL CONSULTATION

Extensive agency and tribal review (formal consultation under AB 52 and SB 18) were conducted for the Guenoc Project and PEIR. Specific to the proposed Tentative Map, a request for review (RFR) was sent al all agencies and departments with jurisdiction or interest over the project on March 3, 2026. Agency comments received are included in Attachment 3 and addressed through Conditions of Approval (Attachment 2). The 11 local tribal governments were also included in the notice, and no comments were received. However, the developer has an existing Tribal Monitoring Agreement with the Middletown Rancheria for the Guenoc Project (and associated future development).

---

## REQUIRED FINDINGS

Based on the whole of the record, including the Guenoc Valley Mixed-Use Planned Development Project PEIR and supporting technical reports, staff finds the Project:

1. The proposed Tentative Map is in conformance with the Subdivision Ordinance, Lake County General Plan, Middletown Area Plan, and Zoning Ordinance.
2. The proposed Tentative Map is consistent with the Subdivision Map Act.
3. A Programmatic Environmental Impact Report (PEIR; SCH No. 2019049134) in compliance with the California Environmental Quality Act (CEQA) for the Guenoc Valley Mixed Use Planned Development Project was certified by the Lake County Planning

Commission on August 8, 2025. A Statement of Overriding Considerations for the Significant and Unavoidable impacts, and Findings of Fact were also adopted. The proposed Tentative Map was fully analyzed within the PEIR and no further environmental review is required.

4. The existing and proposed services are adequate to serve the Tentative Map parcels.

Please refer to the preceding sections of this Staff Report supporting these findings.

---

## **RECOMMENDATION**

### **Staff recommends the Planning Commission:**

1. Find that the proposed Tentative Subdivision (PL-26-9), Anasu Farms Subdivision, was adequately analyzed under the California Environmental Quality Act within the Programmatic EIR for the Guenoc Mixed-Use Planned Development Project (SCH No. 2019049134), and no further analysis is required.
2. Find that the Tentative Subdivision PL-26-9, Anasu Farms Subdivision, for eight phases, one encroachment from Butts Canyon Road, 34 new parcels (30 resort residential, 1 commercial, 3 facility) and six peripheral parcels (from 7 existing parcels and 3 access parcels), applied for by Kevin Case Lotusland Investment Holdings, Inc. for the property located among 16,000-acre Guenoc Valley Site with the nearest property 21423 Butts Canyon Rd, Middletown (APNs: 014-320-08, 013-022-16, 013-022-17, 013-022-20, 013-022-21, 013-022-22, 013-022-23) is in conformity with the provisions of the Subdivision Map Act and Chapter 17 of the Lake County Code, and upon that basis approve said map as modified, subject to the conditions and with the findings listed in the staff report dated July 23, 2026.

---

## **SAMPLE MOTIONS**

1. I move that the Planning Commission find that the proposed Tentative Subdivision (PL-26-9), Anasu Farms Subdivision, was adequately analyzed under the California Environmental Quality Act within the Programmatic EIR for the Guenoc Mixed-Use Planned Development Project, and no further analysis is required.
2. I move that the Planning Commission find that the Tentative Subdivision Map (PL-26-9) applied for by Kevin Case and Lotusland Investment Holdings, Inc. on properties located at 21423 Butts Canyon Rd, Middletown (APNs: 014-320-08, 013-022-16, 013-022-17, 013-022-20, 013-022-21, 013-022-22, 013-022-23) meet the requirements of the Subdivision Map Act and Chapter 17 of the Lake County Municipal Code and that the Tentative Subdivision Map be granted based on the findings and subject to the conditions included in the staff report dated July 23, 2026.



NOTE: In compliance with SEC 18.10 of the Subdivision Ordinance, if the subdivider or other affected property owner is dissatisfied with any action of the Planning Commission with respect to the tentative map, or the nature and extent of improvements required, an appeal in writing to the Board of Supervisors may be submitted for within 15 days after such action. The appropriate forms and applicable fee must be submitted prior to 5:00 p.m. on or before the 15th day following the Planning Commission's decision on this matter.


---

**ATTACHMENTS (BY REFERENCE)**

1. Tentative Subdivision Plans
2. Draft Conditions of Approval
3. Agency Comments

# ANASU FARMS SUBDIVISION

## PHASED VESTING TENTATIVE MAP

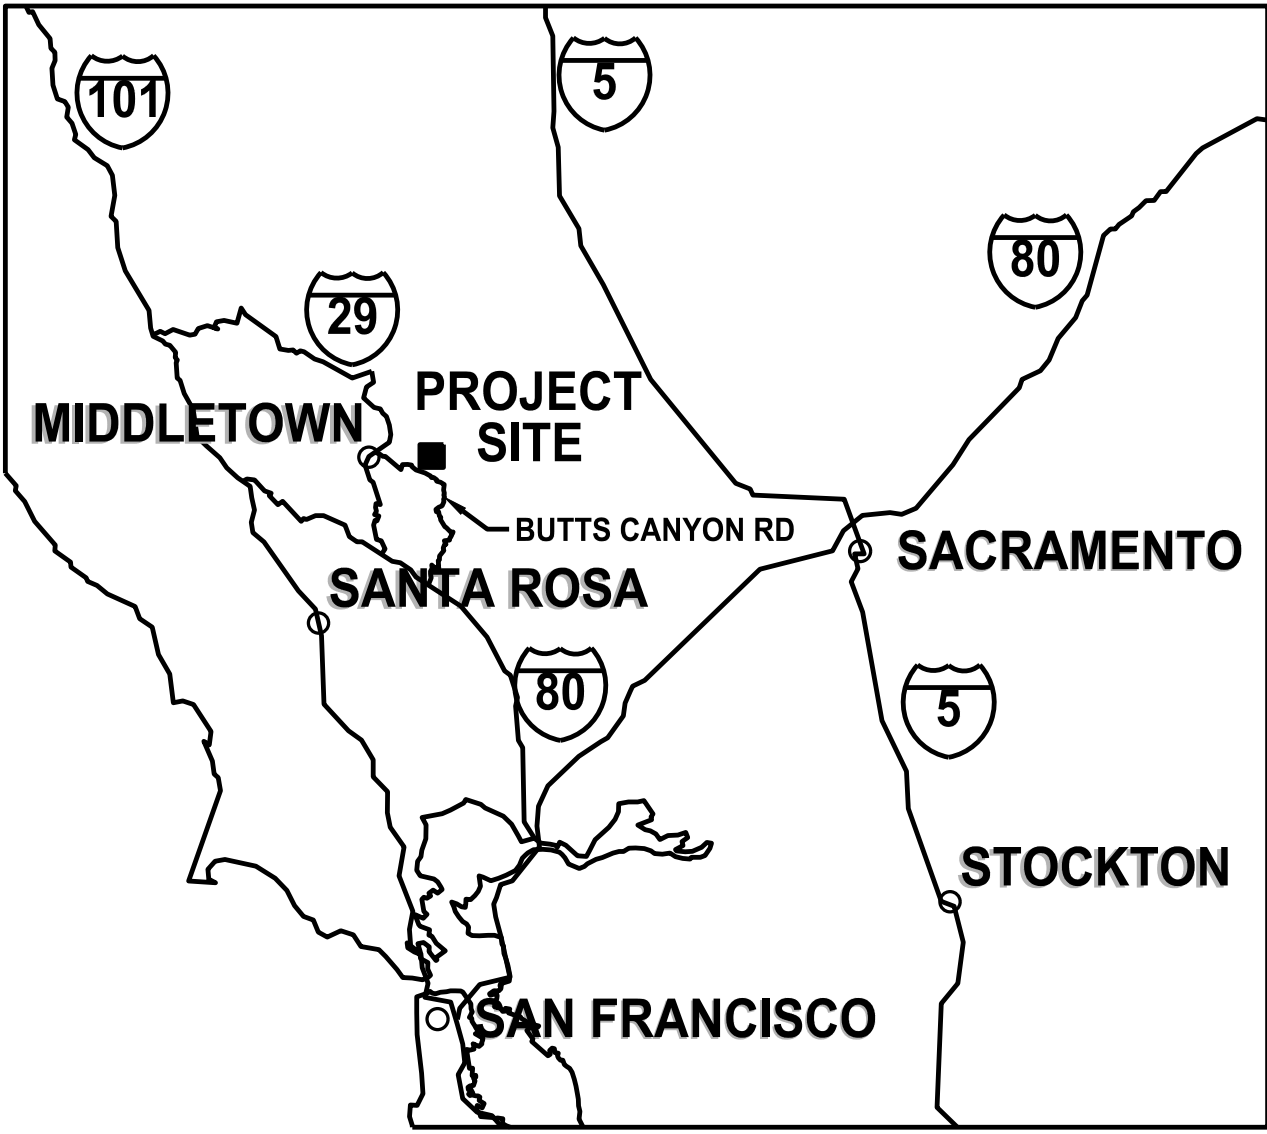

VICINITY MAP  
NOT TO SCALE

### LEGEND

- EXISTING PARCEL
- PROPOSED SUBDIVISION AF - ANASU FARMS
- PROPOSED FUTURE SUBDIVISION DG - DENNSTON GOLF ESTATES UNDER SEPARATE TENTATIVE MAP
- PROPOSED FUTURE SUBDIVISION EQ - EQUESTRIAN UNDER SEPARATE TENTATIVE MAP
- PROPOSED FUTURE SUBDIVISION BR - BOHN RIDGE UNDER SEPARATE TENTATIVE MAP
- EXISTING PARCELS OWNED BY OTHERS;  
NOT A PART (NAP) OF THIS TENTATIVE MAP

| SUBDIVISION LOT COUNTS |             |               |       |
|------------------------|-------------|---------------|-------|
| PARCEL TYPE            | ANASU FARMS | FUTURE PHASES | TOTAL |
| VILLA                  | 0           | 385           | 385   |
| RESORT RESIDENTIAL     | 30          | 111           | 141   |
| COMMERCIAL             | 1           | 11            | 12    |
| FACILITY               | 3           | 12            | 15    |
| GOLF                   | 0           | 4             | 4     |
| PERIPHERAL             | 6           | 22            | 28    |

### NOTES:


- SEE SHEET G0.01 FOR GENERAL NOTES.
- THE INTENT OF THE SUBDIVIDER IS TO PROCESS THE FINAL PARCEL MAPS OF EACH TENTATIVE MAP IN PHASES.
- SEE SHEETS G1.00 AND G1.01 FOR ANASU FARMS MASTER ROAD PLAN AND TYPICAL SECTIONS (USED FOR REFERENCE AND CONTEXT OF FULL BUILDOUT OF ANASU FARMS).
- SEE SHEETS AF1.00 THROUGH AF2.02 FOR EXISTING AND PROPOSED PARCELS RELATED TO SUBDIVISION AF.

### OWNER:

NAME: GUENOC VALLEY, LLC; BOHN VALLEY 1, LLC; BUTTS CREEK, LLC  
MANAGED BY LOTUSLAND INVESTMENT HOLDINGS, INC., A CALIFORNIA COMPANY (SEE SHEET AF1.00)  
ADDRESS: 22000 BUTTS CANYON ROAD, MIDDLETOWN, CA 95461

### TENTATIVE MAP PREPARER:

COMPANY: SHERWOOD DESIGN ENGINEERS  
ADDRESS: 2548 MISSION STREET, SAN FRANCISCO, CA 94110  
LICENSED CIVIL ENGINEER: CODY ANDERSON, P.E.  
LICENSE NUMBER: C84120  
EXPIRATION DATE: 9/30/2027

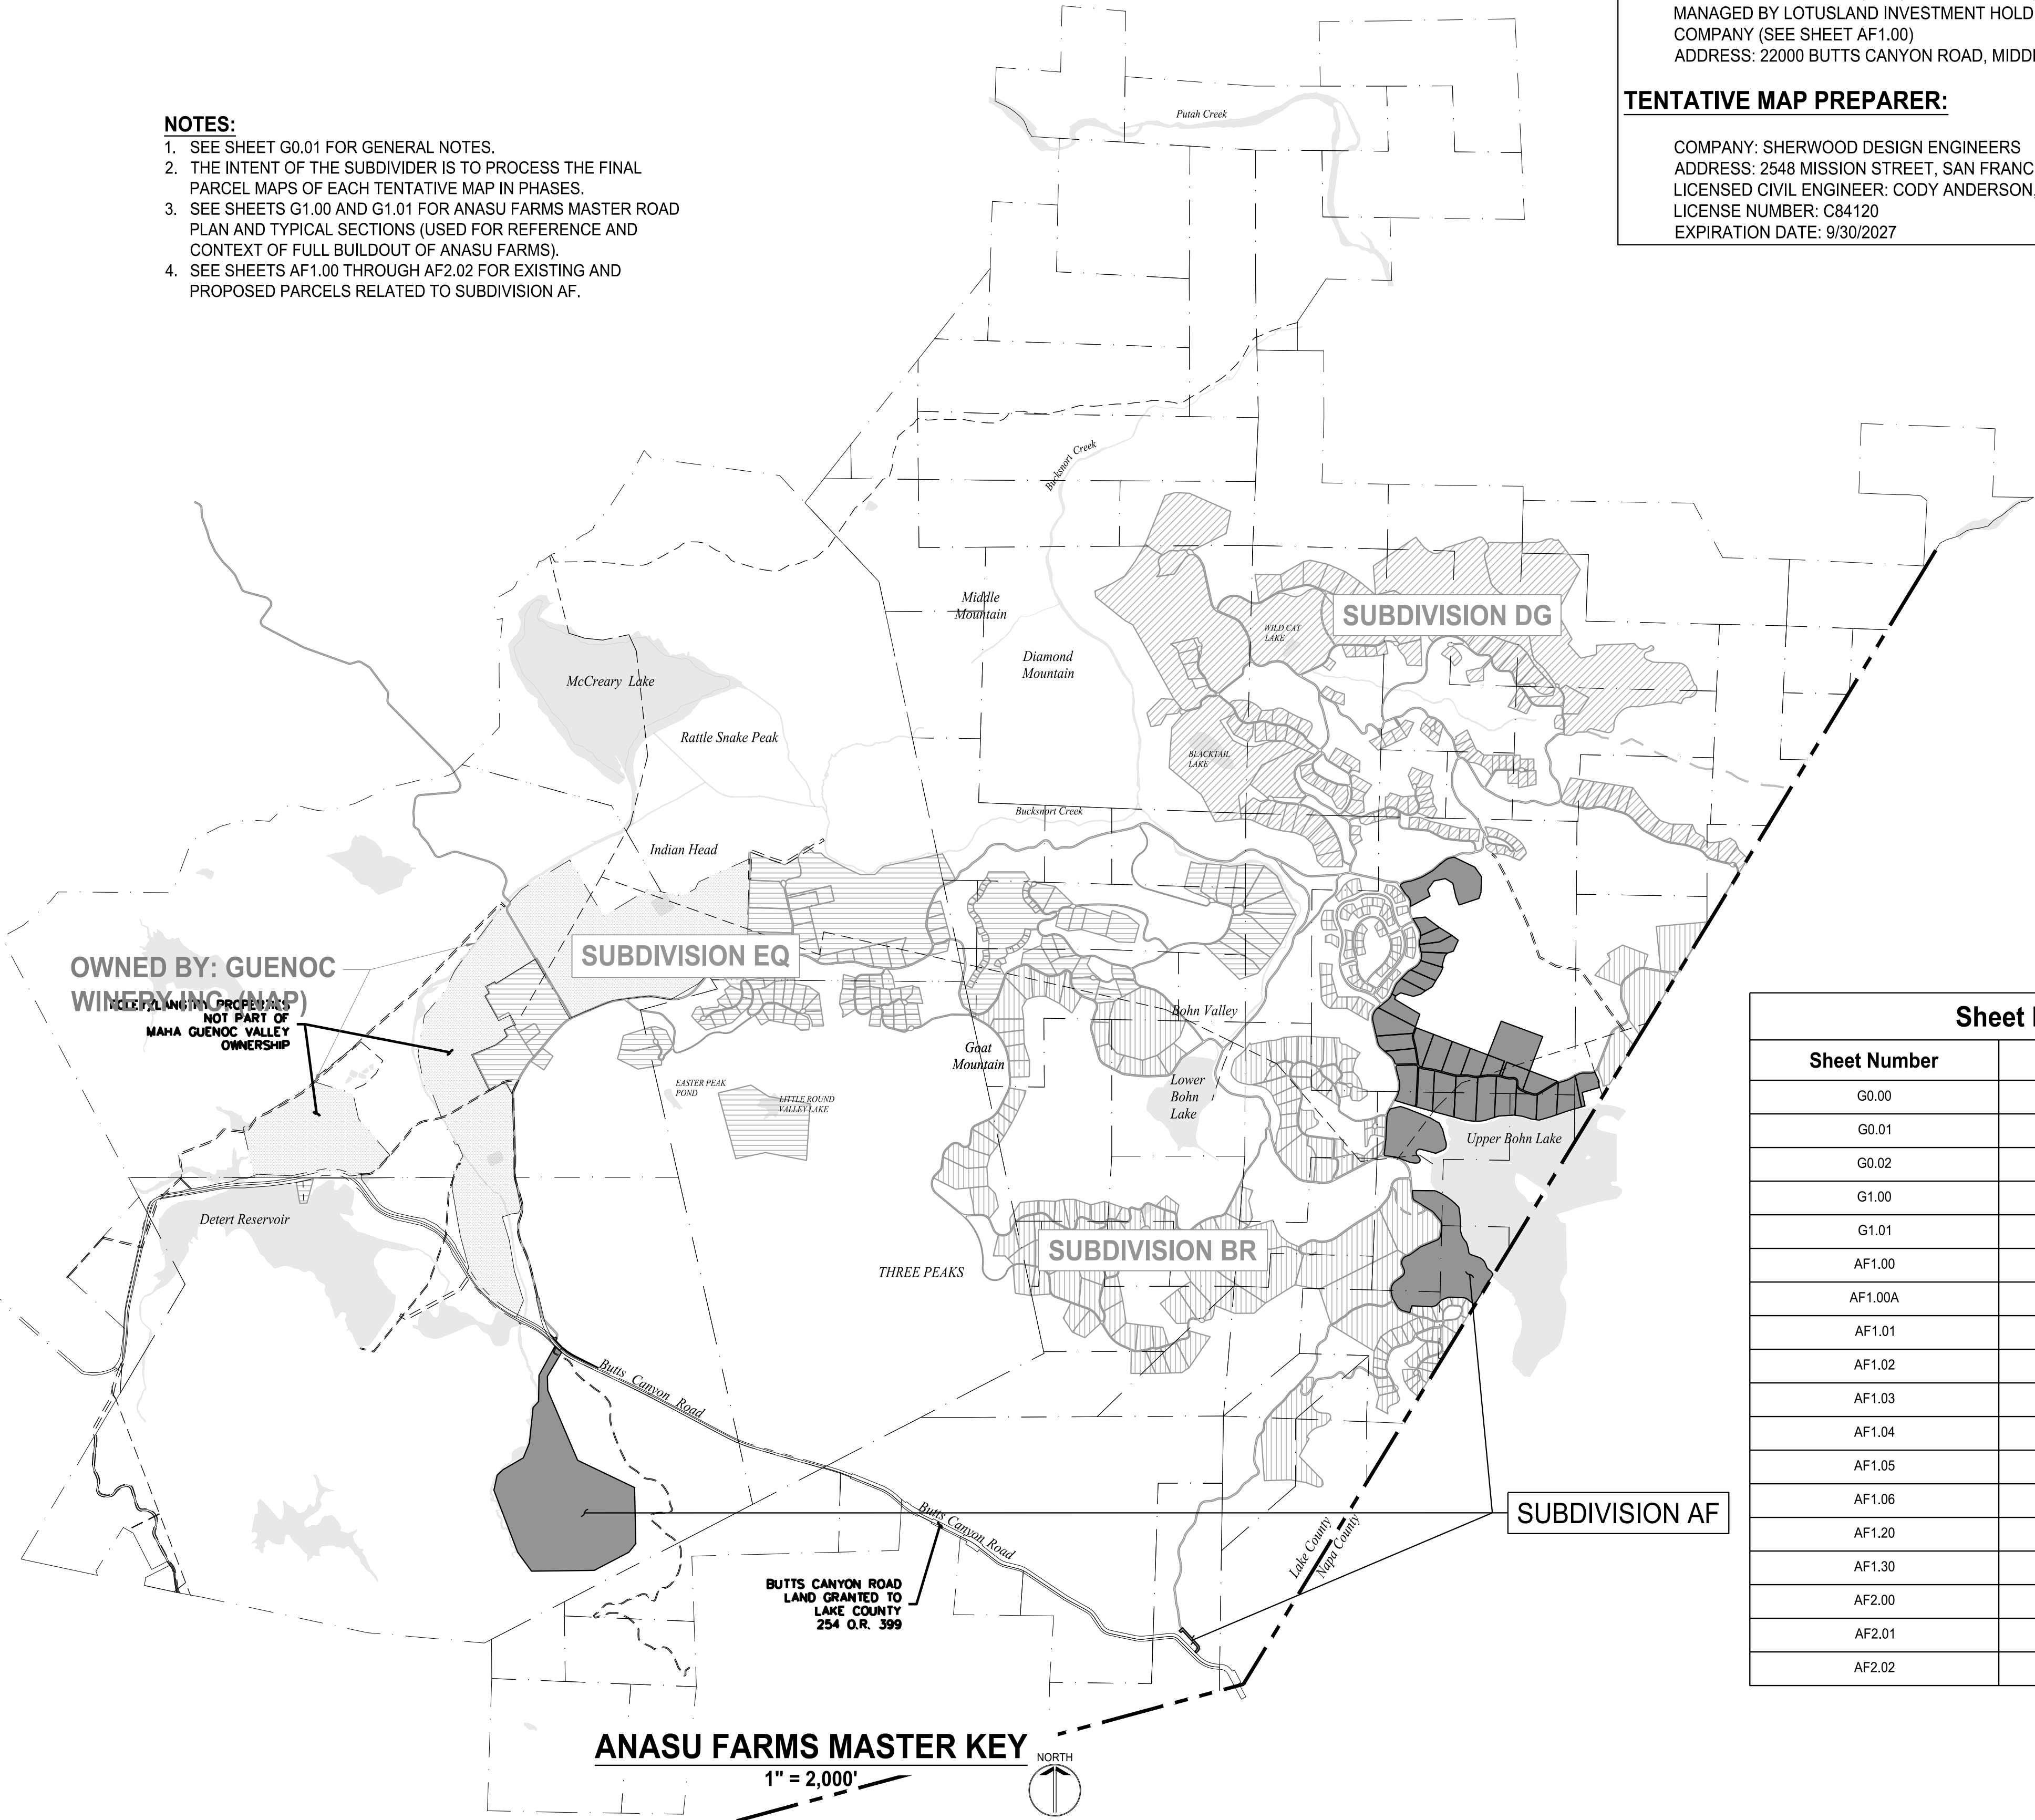

### ANASU FARMS MASTER KEY

1" = 2,000'



### Sheet List


| Sheet Number | Sheet Title                 |
|--------------|-----------------------------|
| G0.00        | GENERAL INFORMATION         |
| G0.01        | GENERAL NOTES               |
| G0.02        | DEVELOPMENT RESTRICTIONS    |
| G1.00        | MASTER ROAD PLAN            |
| G1.01        | TYPICAL ROAD SECTIONS       |
| AF1.00       | AF OVERALL SUBDIVISION PLAN |
| AF1.00A      | AF OVERALL SUBDIVISION PLAN |
| AF1.01       | AF SUBDIVISION PLAN         |
| AF1.02       | AF SUBDIVISION PLAN         |
| AF1.03       | AF SUBDIVISION PLAN         |
| AF1.04       | AF SUBDIVISION PLAN         |
| AF1.05       | AF SUBDIVISION PLAN         |
| AF1.06       | AF SUBDIVISION TABLES       |
| AF1.20       | PARCEL AVERAGE SLOPES       |
| AF1.30       | AF PHASING PLAN             |
| AF2.00       | PERIPHERAL PARCEL PLAN      |
| AF2.01       | PERIPHERAL PARCEL PLAN      |
| AF2.02       | PERIPHERAL PARCEL TABLES    |



| SCALE: 1"=2000'<br>0' 1"                                                                           |      |          |
|----------------------------------------------------------------------------------------------------|------|----------|
| Note: If the graphic scale shown not equal 1" this sheet has been modified from its original size. |      |          |
| NO                                                                                                 | DATE | ISSUANCE |
|                                                                                                    |      |          |

|                                                                                                                                                                                                          |             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| ©2025 Sherwood Design Engineers<br>The designs and concepts shown are the sole property of Sherwood Design Engineers and may not be used without the prior written consent of Sherwood Design Engineers. |             |
| PROJECT NO.                                                                                                                                                                                              | 24-193      |
| DATE                                                                                                                                                                                                     | MAY 4, 2026 |
| DRAWN                                                                                                                                                                                                    | TB.EO.SS    |
| CHECKED                                                                                                                                                                                                  | CA.SG       |

ANASU FARMS  
SUBDIVISION  
GUENOC VALLEY  
LAKE COUNTY  
CALIFORNIA



PHASED VESTING  
TENTATIVE MAP  
SUBDIVISION AF

GENERAL  
INFORMATION

G0.00



P:\2024\24-193\_MAHA\_PH1A\03\_DESIGN\01\_CAD\01\_TENT MAP\PKG1 - APP\PKG1-G0 01-GENERAL NOTES.DWG.Ellen Obenshain.5/4/2026 11:34 AM\ANSI\_Tul\_bleed\_D\_ (22.00 x\_34.00\_inches)

GENERAL NOTES:

1. REFER TO FINAL ADOPTED DEVELOPMENT AGREEMENT FOR FURTHER SUBDIVISION DETAILS, INCLUDING SEQUENCING AND EXPIRATION DETAILS.
2. THE PROPERTIES WITHIN THIS SUBDIVISION ARE PROPOSED TO BE REZONED TO A NEWLY FORMED ZONING DISTRICT, THE GUENOC VALLEY PLANNED DEVELOPMENT (ZONE GVD) WITH OPEN SPACE AND AGRICULTURAL PRESERVE OVERLAYS/COMBINING DISTRICTS. REFER TO THE RELEVANT ZONING DISTRICTS FOR DEVELOPMENT REGULATIONS.
3. REFER TO THE SPECIFIC PLAN OF DEVELOPMENT FOR ALLOWED DEVELOPMENT INCLUDING PLANNED DEVELOPMENT DETAILS, DENSITY, AND SETBACKS.
4. REFER TO THE CC&R'S FOR FUTURE HOMEOWNERSHIP ASSOCIATION DETAILS AND MAINTENANCE REQUIREMENTS.
5. REFER TO THE WATER, WASTEWATER, AND ELECTRICAL FEASIBILITY REPORTS FOR THE PRIVATE UTILITY DISTRICT DETAILS.
6. REFER TO THE DESIGN GUIDELINES FOR LOT LAYOUT, DENSITY, BUILDING MASSING, LANDSCAPE DETAILS, ROAD AND PATHWAY DESIGN, STREET LIGHTING, DIRECTIONAL SIGNAGE AND RESIDENTIAL DESIGNS.
7. REFER TO THE FIRE MANAGEMENT PLAN FOR FIRE PREVENTION GUIDELINES AND VEGETATION FUEL REDUCTION SETBACKS.
8. ALL PROPOSED ROADWAYS WITHIN PROPERTY ARE PRIVATE AND ARE TYPICALLY INDEPENDENT INDIVIDUAL PARCELS, UNLESS OTHERWISE NOTED. THERE WILL BE NO PUBLIC RIGHTS OF WAY EXCEPT ALONG THE ENTRY ROADS UP TO THE FIRST GATE.
9. ALL ROADWAY CORRIDORS SHALL INCORPORATE EASEMENTS OF 50 FEET BEYOND EITHER SIDE OF THE EDGE OF PAVEMENT FOR VEGETATION MANAGEMENT, DEPENDING ON ENVIRONMENTAL CONSTRAINTS, WHICH SHALL BE FURTHER DEFINED IN AND MANAGED BY THE CC&RS.
10. ROAD NAMES ARE REFERENCED WITH NUMBERS, PROPOSED NAMES WILL BE PROVIDED IN SUBSEQUENT SUBMITTAL PRIOR TO HEARING.

SUBDIVISION NOTES:

1. SEE PARCELS SHEETS FOR BEARING, DISTANCE, AND CURVE INFORMATION OF PARCELS.
2. PERIPHERAL PARCELS ARE PROPOSED TO BE SUBDIVIDED AND ARE INCLUDED FOR REFERENCE. SEE PERIPHERAL PARCEL SHEETS FOR BEARING, DISTANCE, AND CURVE INFORMATION.
3. ENVIRONMENTAL PRESERVATION AREAS, INCLUDING SENSITIVE BIOLOGICAL SPECIES OR CULTURAL SITES WHERE APPLICABLE, WITHIN SUBDIVIDED PARCELS MAY BE IDENTIFIED AS CONCEPTUAL ON THE TENTATIVE MAP AND THEN FINAL ON THE FINAL MAP.
4. FOR WATER SUPPLY AND WASTEWATER DISPOSAL SYSTEMS AND DISTRIBUTION, REFER TO SPECIFIC PLAN OF DEVELOPMENT AND TECHNICAL FEASIBILITY REPORTS.
5. PROPOSED PRIVATE UTILITIES WILL BE REQUIRED THROUGHOUT THE SITE, INCLUDING SEWER, WATER, ELECTRIC, AND COMMUNICATIONS. PRELIMINARY LOCATIONS OF MAJOR FACILITIES ARE SHOWN FOR REFERENCE IN TENTATIVE MAPS, HOWEVER, ADDITIONAL INFORMATION IS PROVIDED ON THE SPECIFIC PLAN OF DEVELOPMENT.

EASEMENTS:

1. EXISTING EASEMENTS ARE SHOWN IN THEIR APPROXIMATE LOCATION PER RECORD DATA AND HAVE NOT BEEN FIELD SURVEYED.
2. ALL PROPOSED PRIVATE UTILITY AND ACCESS EASEMENTS (PUE), WHICH ARE TO BE SPECIFICALLY DEFINED DURING THE FINAL MAP STAGE, SHALL INCORPORATE THE FOLLOWING ELEMENTS WITHIN A COMBINED TYPICAL EASEMENT WIDTH OF 50 FEET TOTAL:
  - a. TOTAL PAVED ROADWAY, INCLUDING SHOULDERS, FOR SHARED ACCESS (RANGES IN WIDTH FROM 22 TO 28 FEET FOR TWO-WAY ROADS AND 14 FEET FOR ONE-WAY ROADS).
  - b. RETAINING AND DRAINAGE CONVEYANCE FEATURES (UP TO 12 FEET WIDE).
  - c. UTILITY PIPING AND STRUCTURES (UP TO 10 FEET WIDE)
  - d. EXCEPTIONS MAY OCCUR FOR SPECIFIC UTILITY STRUCTURES OR DRAINAGE FEATURES REQUIRING ADDITIONAL WIDTH
3. PROPOSED DRAINAGE MANAGEMENT EASEMENTS SHALL EXTEND TO 30 FEET FROM THE TOP OF BANKS OF PERENNIAL STREAMS AND 20 FEET FROM THE TOP OF BANKS OF INTERMITTENT STREAMS.

EXISTING CONDITIONS AND NATURAL RESOURCE PRESERVATION:

1. SETBACKS FOR DRAINAGES, RARE PLANTS, WOODLANDS, AND RIPARIAN ZONES WILL BE ADDRESSED WITHIN THE SPECIFIC PLAN OF DEVELOPMENT DOCUMENTATION AND THE ENVIRONMENTAL IMPACT REPORT, UNDER SEPARATE COVER.
2. FINAL CONFIGURATION OF DEDICATED OPEN SPACE SHALL BE DEVELOPED AS PART OF THE ENVIRONMENTAL REVIEW PROCESS.
3. OAK WOODLAND PRESERVATION AREAS WITHIN PARCELS MAY BE SUBJECT TO DEED RESTRICTIONS TO LIMIT REMOVAL OF TREES. FINAL LOCATIONS WILL BE DIRECTED BY THE ENVIRONMENTAL IMPACT REPORT AND WILL ULTIMATELY BE RECORDED IN THE FINAL MAP.
4. AREAS IDENTIFIED AS "DEVELOPMENT RESTRICTION AREAS" AS CONTAINING CULTURAL RESOURCES WILL BE DEED RESTRICTED TO PROHIBIT THEIR DISTURBANCE, AND MAY BE MORE ACCURATELY SURVEYED FOR INCLUSION ON THE FINAL MAP.
5. DEDICATED HABITAT CORRIDORS WITHIN PARCELS MAY BE SUBJECT TO DEED RESTRICTIONS TO LIMIT PLACEMENT, HEIGHT AND COMPOSITION OF FENCING, VEGETATION MANAGEMENT AND DISTURBANCE OF NATURAL RESOURCES. FINAL CONFIGURATIONS WILL ULTIMATELY BE RECORDED IN THE FINAL MAP WITH THE TERMS OF SAID RESTRICTIONS TO BE INCLUDED IN THE COVENANTS, CONDITIONS AND RESTRICTIONS OF THE HOMEOWNERS' ASSOCIATIONS AND/OR OTHER REAL ESTATE PURCHASE AGREEMENTS.

PHASING NOTES:


1. FINAL PARCEL MAPS FILED WILL INDICATE SUBDIVISION CONSTRUCTION PHASING.
2. FINAL MAPS DEVELOPED FOR EACH AGREED UPON PHASE OF THE PROPOSED EVENTUAL SUBDIVISION WILL INCLUDE ALL PARCEL TYPES, INCLUDING THE ROAD PARCELS ADJACENT TO AND REQUIRED FOR EACH SUBDIVISION PHASE.



| SCALE:<br><div><div>0</div><div>1"</div></div> <div>Note: If the graphic scale does not equal 1" this sheet has been modified from its original size.</div> |      |          |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|------|----------|
| NO                                                                                                                                                          | DATE | ISSUANCE |
|                                                                                                                                                             |      |          |

|                                                                                                                                                                                                          |             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| ©2025 Sherwood Design Engineers<br>The designs and concepts shown are the sole property of Sherwood Design Engineers and may not be used without the prior written consent of Sherwood Design Engineers. |             |
| PROJECT NO.                                                                                                                                                                                              | 24-193      |
| DATE                                                                                                                                                                                                     | MAY 4, 2026 |
| DRAWN                                                                                                                                                                                                    | TB.EO.SS    |
| CHECKED                                                                                                                                                                                                  | CA.SG       |

ANASU FARMS  
SUBDIVISION  
GUENOC VALLEY  
LAKE COUNTY  
CALIFORNIA

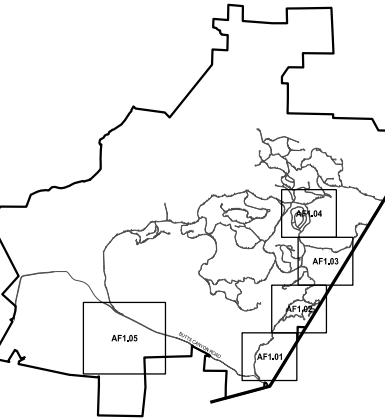

PHASED VESTING  
TENTATIVE MAP  
SUBDIVISION AF

GENERAL  
NOTES

G0.01



P:\2024\24-193\_MAHA\_PH1A\03\_DESIGN\01\_CAD\01\_TENT MAP\PKG1 - APPKG1-G0.02-DEVELOPMENT RESTRICTIONS.DWG:Ellen Obenshain:5/4/2026 11:41 AM:ANSI\_full\_bleed\_D\_(22.00\_x\_34.00\_inches)



LEGEND

|                                         |  |
|-----------------------------------------|--|
| PROPOSED PARCEL BOUNDARY                |  |
| EXISTING PARCEL BOUNDARY                |  |
| NOT A PART (NAP)                        |  |
| PRESERVED OPEN SPACE                    |  |
| BUILDING ENVELOPE (SUBDIVISION AF ONLY) |  |
| OAK WOODLAND PRESERVATION AREA          |  |
| HABITAT CONNECTIVITY EASEMENT AREA      |  |
| COUNTY LINE                             |  |
| EXISTING ROAD AND UTILITY EASEMENT      |  |
| SCENIC COMBINING DISTRICT               |  |
| WATERWAY COMBINING DISTRICT             |  |
| WETLANDS COMBINING DISTRICT             |  |
| AGRICULTURAL OVERLAY ZONE               |  |

NOTE:


1. DEDICATED HABITAT CORRIDOR, PRESERVED OPEN SPACE AND OAK WOODLAND PRESERVATION AREAS ARE SHOWN FOR ILLUSTRATIVE PURPOSES. FINAL CONFIGURATION IS SUBJECT TO CHANGE AND WILL BE INCORPORATED IN THE FINAL MAP.



| SCALE: 1"=1750'                                                                                         |      |          |
|---------------------------------------------------------------------------------------------------------|------|----------|
| Note: If the graphic scale does not equal 1"=1750' this sheet has been modified from its original size. |      |          |
| NO                                                                                                      | DATE | ISSUANCE |
|                                                                                                         |      |          |

|                                                                                                                                                                                                          |             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| ©2025 Sherwood Design Engineers<br>The designs and concepts shown are the sole property of Sherwood Design Engineers and may not be used without the prior written consent of Sherwood Design Engineers. |             |
| PROJECT NO.                                                                                                                                                                                              | 24-193      |
| DATE                                                                                                                                                                                                     | MAY 4, 2026 |
| DRAWN                                                                                                                                                                                                    | TB.EO.SS    |
| CHECKED                                                                                                                                                                                                  | CA.SG       |

**ANASU FARMS  
SUBDIVISION**  
GUENOC VALLEY  
LAKE COUNTY  
CALIFORNIA

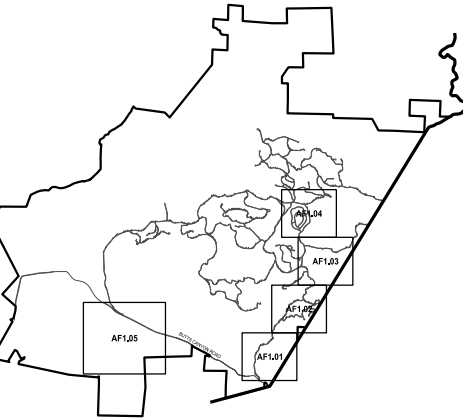

**PHASED VESTING  
TENTATIVE MAP  
SUBDIVISION AF**

**DEVELOPMENT  
RESTRICTIONS**

**G0.02**





|                                                                                                           |      |          |
|-----------------------------------------------------------------------------------------------------------|------|----------|
| SCALE: 1"=1100'                                                                                           |      |          |
| Note: If the graphic scales does not equal 1"=1100', this sheet has been modified from its original size. |      |          |
| NO                                                                                                        | DATE | ISSUANCE |
|                                                                                                           |      |          |

©2025 Sherwood Design Engineers  
The designs and concepts shown are the sole property of Sherwood Design Engineers and may not be used without the prior written consent of Sherwood Design Engineers.


PROJECT NO. 24-193

DATE MAY 4, 2026

DRAWN TB.EO.SS

CHECKED CA.GS

**ANASU FARMS  
SUBDIVISION**  
GUENOC VALLEY  
LAKE COUNTY  
CALIFORNIA

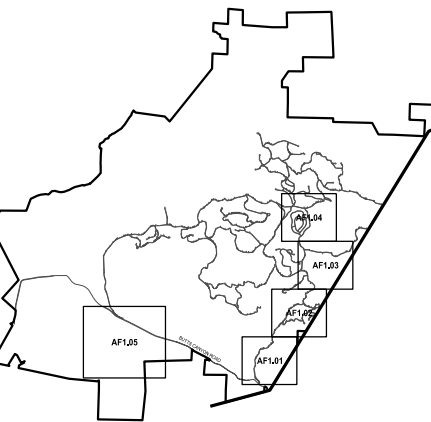


**PHASED VESTING  
TENTATIVE MAP  
SUBDIVISION AF**

**MASTER ROAD  
PLAN**

**G1.00**



| ROAD NAME | LENGTH [FT] | WIDTH [FT] | ROAD TYPE |
|-----------|-------------|------------|-----------|
| ROAD 1    | 12,960      | 26         | A         |
| ROAD 2    | 10,830      | 26         | A         |
| ROAD 3    | 32,381      | 26         | A         |
| ROAD 4    | 1,133       | 22         | B         |
| ROAD 5    | 1,109       | 14         | D         |
| ROAD 6    | 4,602       | 26         | A         |
| ROAD 6A   | 1,327       | 22         | B         |
| ROAD 7    | 5,350       | 22         | B         |
| ROAD 8    | 750         | 14         | D         |
| ROAD 9    | 415         | 22         | B         |
| ROAD 10   | not used    | not used   | not used  |
| ROAD 11   | not used    | not used   | not used  |
| ROAD 12   | 10,117      | 26         | A         |
| ROAD 12A  | 8,154       | 14         | D         |
| ROAD 13   | 1,569       | 22         | B         |
| ROAD 14   | 8,716       | 26         | A         |
| ROAD 15   | 8,503       | 26         | A         |
| ROAD 16   | 1,331       | 22         | B         |
| ROAD 17   | 4,204       | 22         | B         |
| ROAD 18   | 2,776       | 22         | B         |
| ROAD 18A  | 3,160       | 16         | C         |
| ROAD 19   | 950         | 22         | B         |
| ROAD 20   | not used    | not used   | not used  |
| ROAD 21   | not used    | not used   | not used  |
| ROAD 22   | not used    | not used   | not used  |
| ROAD 23   | not used    | not used   | not used  |
| ROAD 24   | 2,085       | 22         | B         |
| ROAD 25   | 802         | 22         | B         |
| ROAD 26   | 1,320       | 26         | A         |
| ROAD 27   | 915         | 22         | B         |
| ROAD 28   | 4,174       | 22         | B         |
| ROAD 29   | 3,227       | 26         | A         |
| ROAD 29A  | 1,055       | 16         | C         |
| ROAD 30   | 3,908       | 26         | A         |
| ROAD 31   | 1,950       | 22         | B         |
| ROAD 32   | 2,434       | 26         | A         |
| ROAD 33   | 3,090       | 22         | B         |
| ROAD 33A  | 1,025       | 16         | C         |
| ROAD 34   | 13,835      | 22         | B         |
| ROAD 35   | 2,582       | 22         | B         |
| ROAD 36   | 7,951       | 22         | B         |
| ROAD 37   | 5,034       | 22         | B         |
| ROAD 38   | 9,614       | 26         | A         |
| ROAD 39   | 6,025       | 22         | B         |
| ROAD 40   | 782         | 22         | B         |
| ROAD 41   | 2,980       | 22         | B         |
| ROAD 41A  | 2,883       | 14         | D         |
| ROAD 42   | 1,761       | 22         | B         |
| ROAD 43   | 950         | 22         | B         |
| ROAD 44   | 617         | 14         | D         |
| ROAD 45   | 4,310       | 22         | B         |
| ROAD 46   | 667         | 22         | B         |
| ROAD 48   | not used    | not used   | not used  |
| ROAD 49   | not used    | not used   | not used  |
| ROAD 50   | 9,093       | 26         | A         |
| ROAD 51   | not used    | not used   | not used  |
| ROAD 52   | 382         | 22         | B         |
| ROAD 53   | 2,501       | 22         | B         |
| ROAD 54   | 1,229       | 22         | B         |
| ROAD 55   | 2,274       | 22         | B         |
| ROAD 55A  | 1,995       | 14         | D         |
| ROAD 56   | 615         | 14         | D         |
| ROAD 57   | 1,387       | 26         | A         |
| ROAD 58   | 2,533       | 22         | B         |
| ROAD 59   | 2,825       | 22         | B         |
| ROAD 60   | 11,696      | 22         | B         |

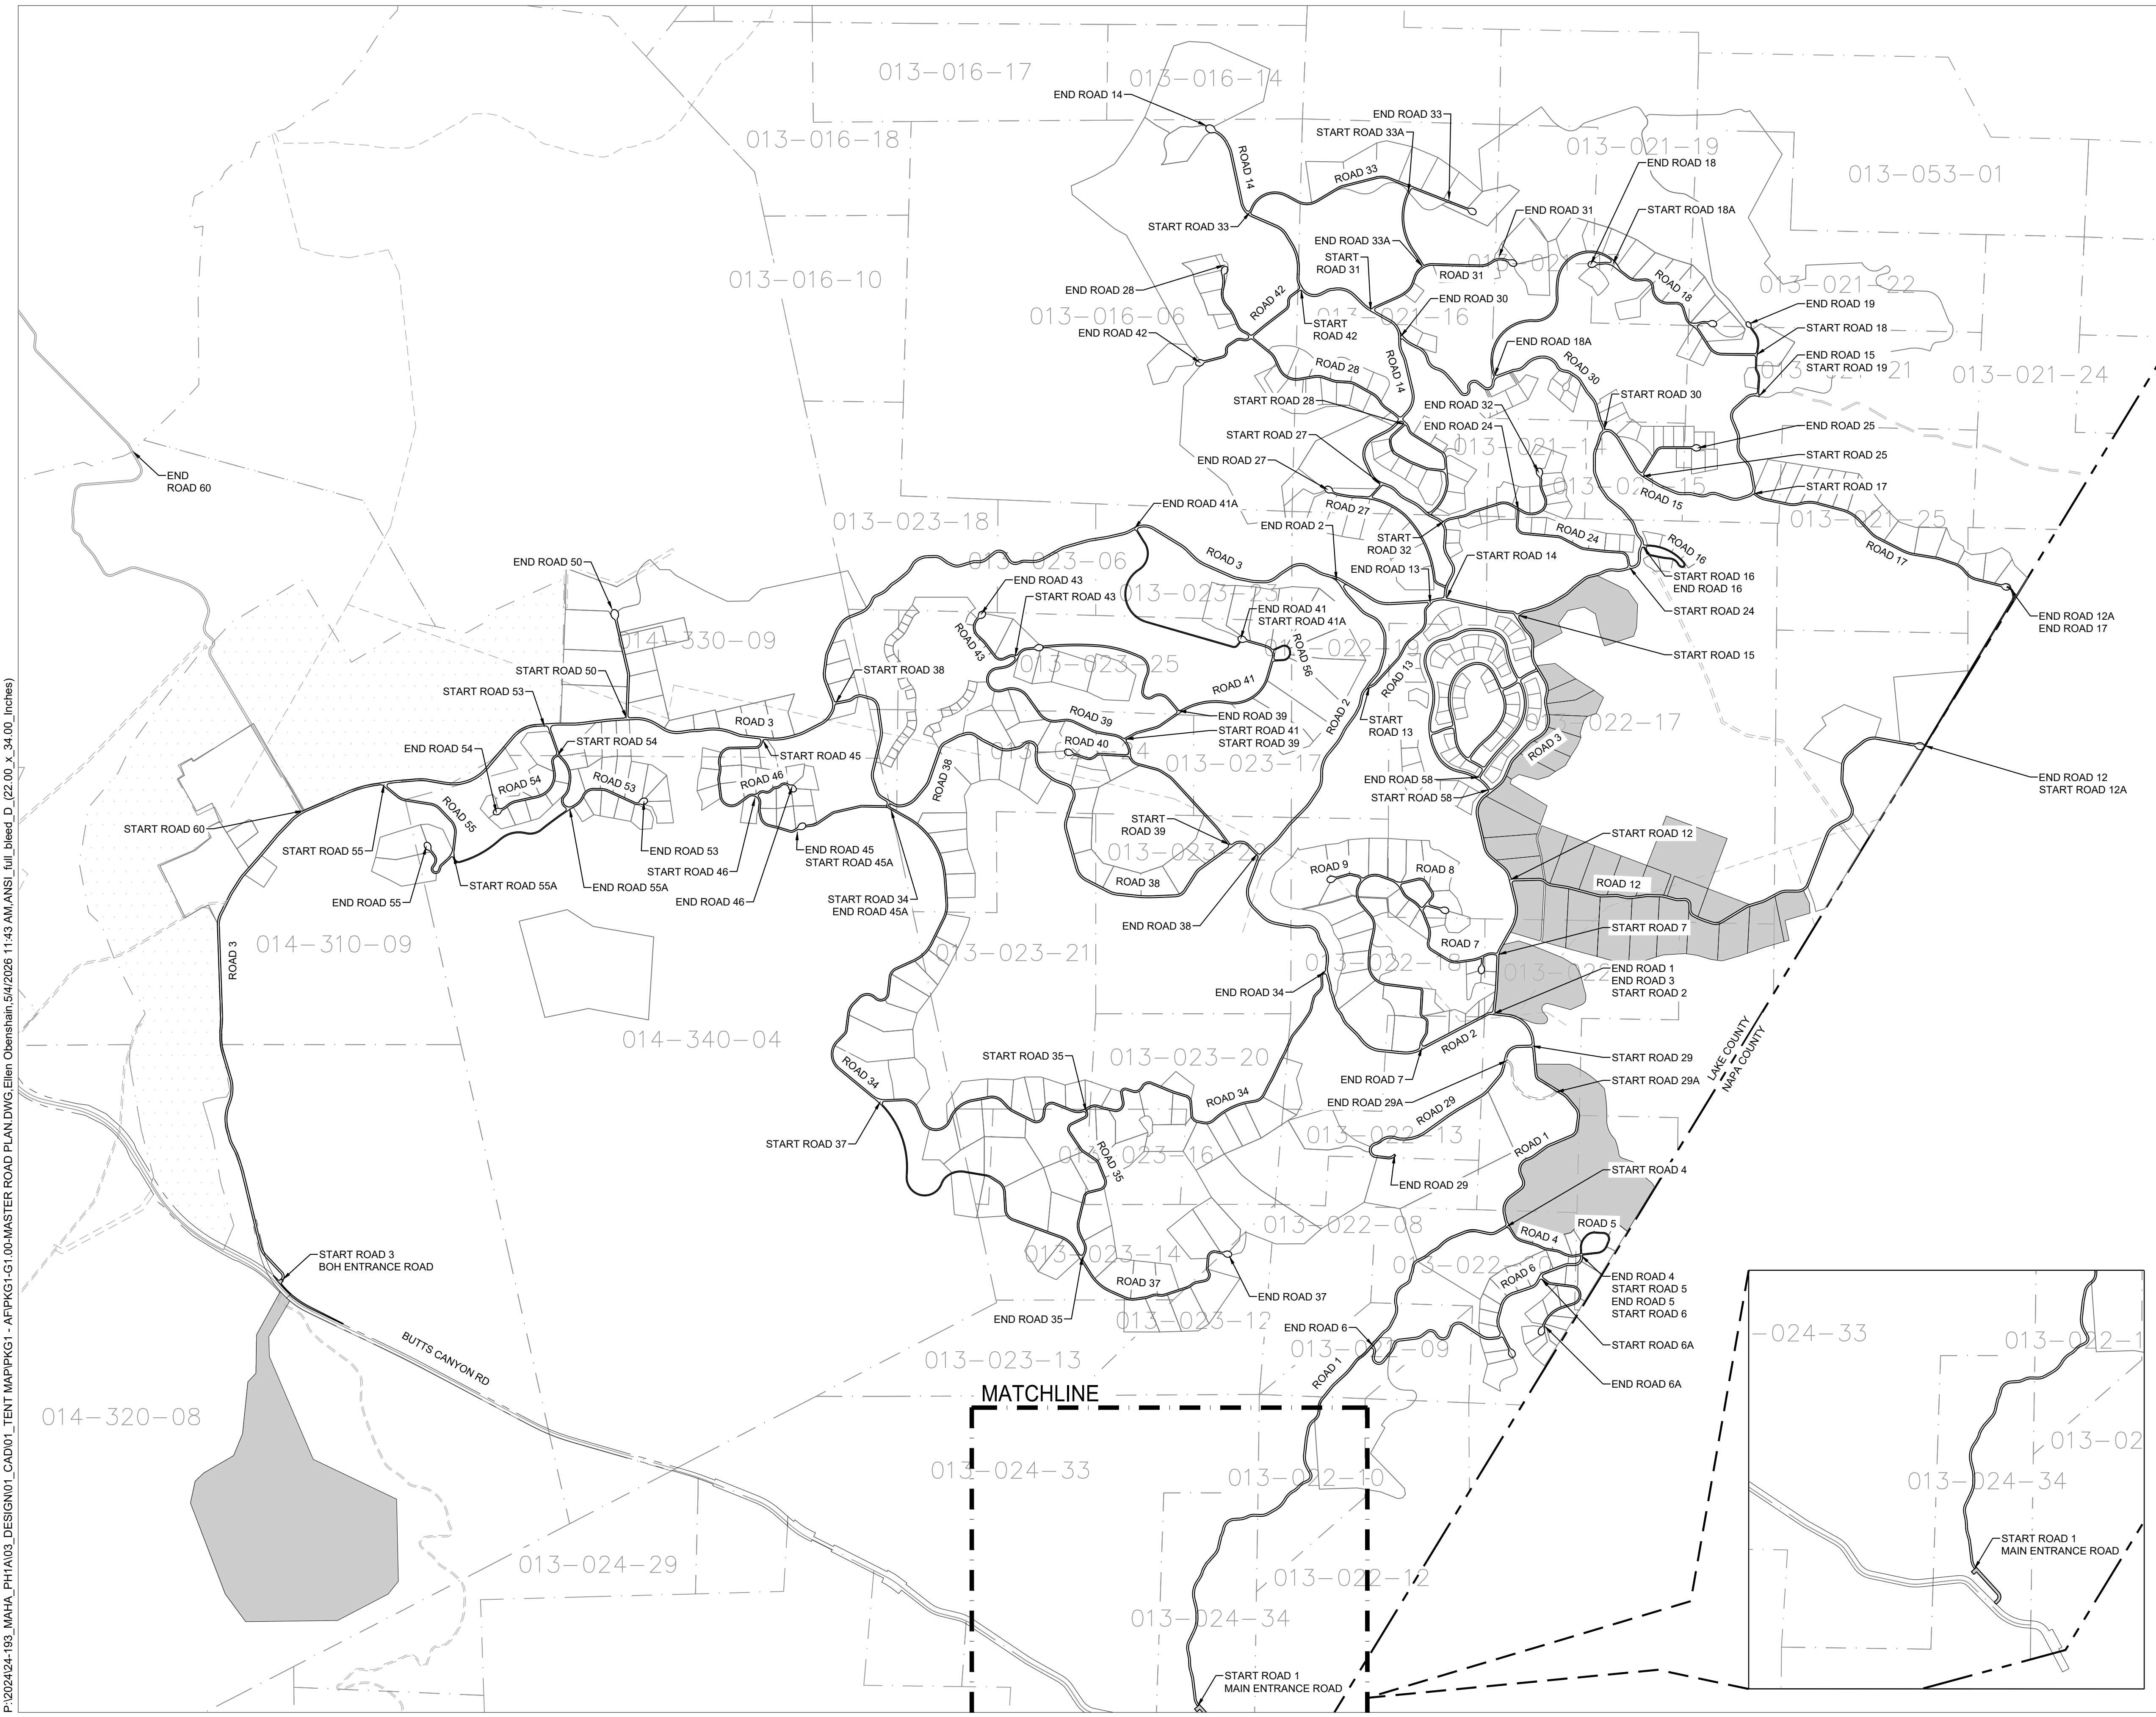





TYPICAL ROAD SECTIONS



TYPE A - CROWNED/SUPERELEVATED PRIMARY 2 LANE ROAD

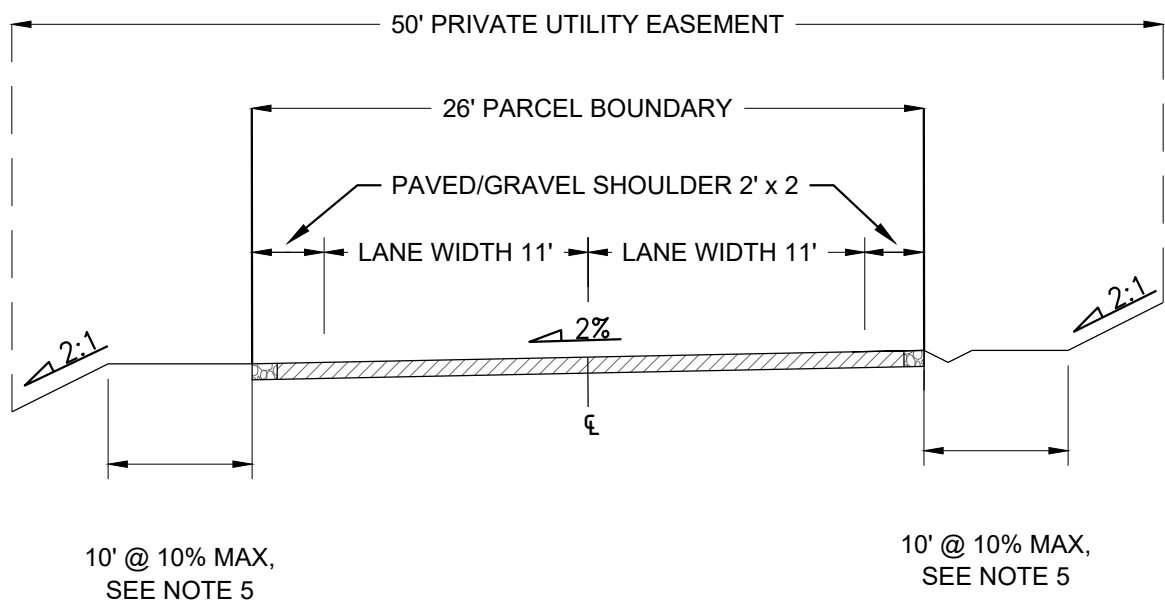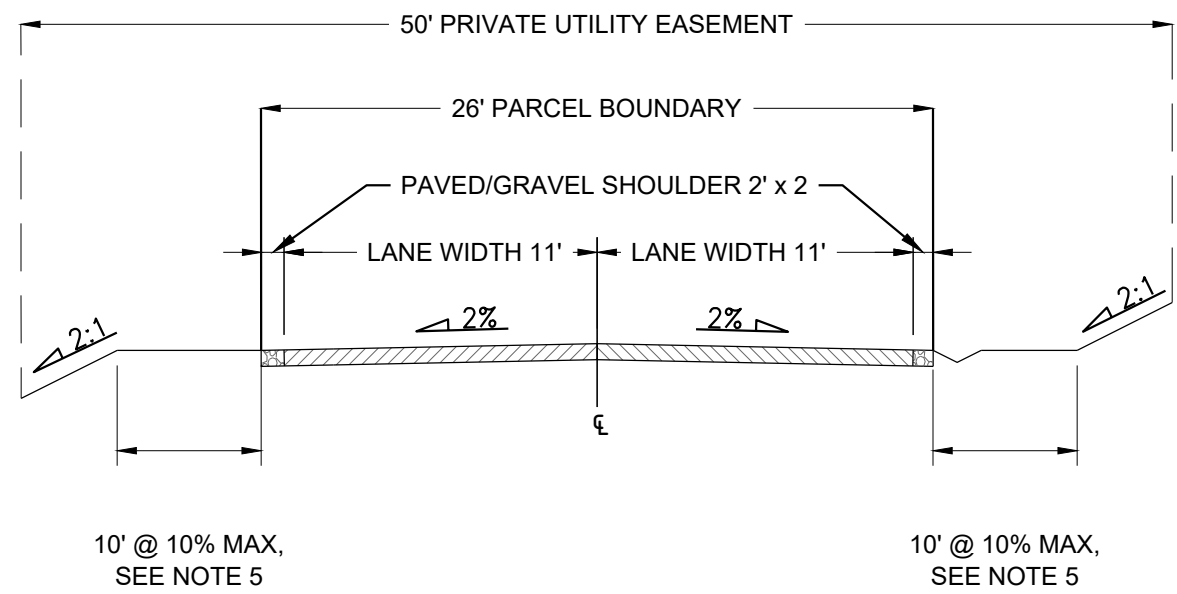


TYPE B - CROWNED/SUPERELEVATED SECONDARY 2 LANE ROAD

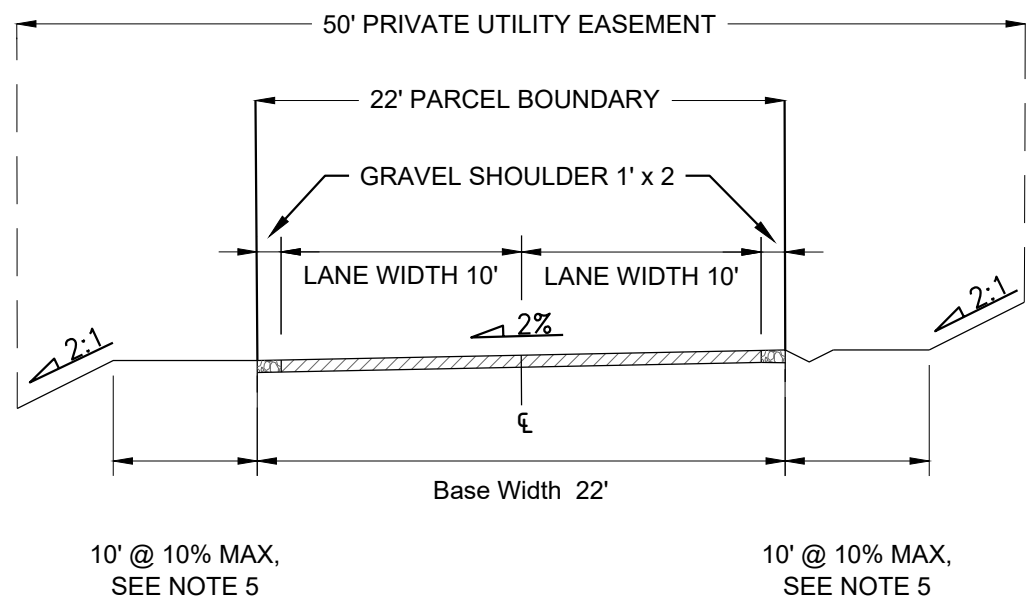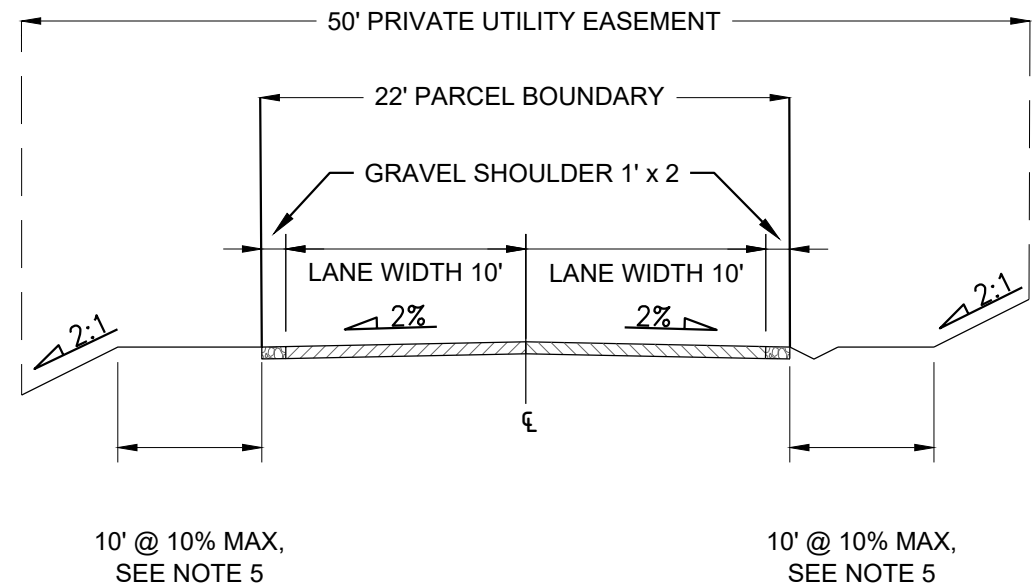

TYPE C - CROWNED/SUPERELEVATED GRAVEL ROAD

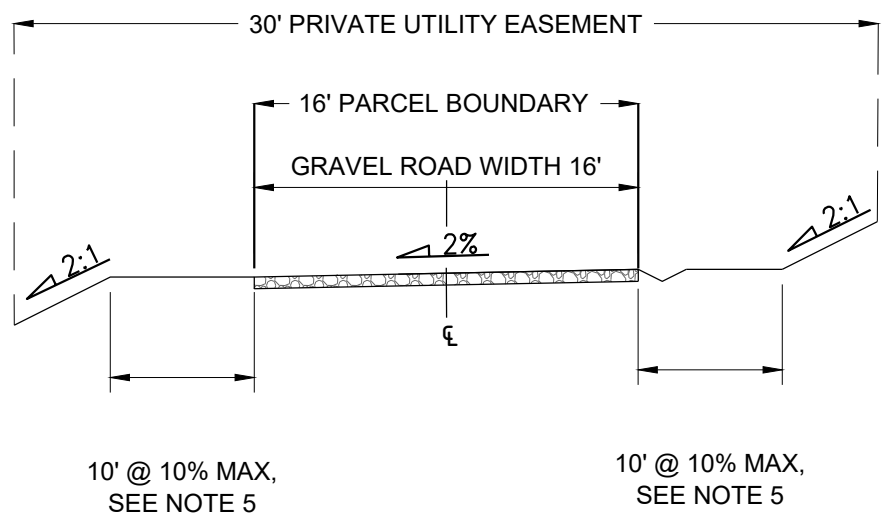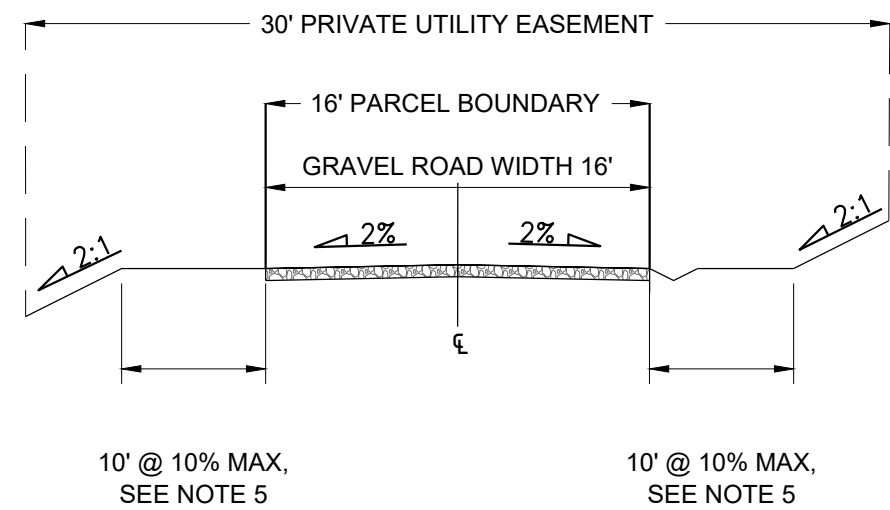

TYPE D - ONE WAY ROAD

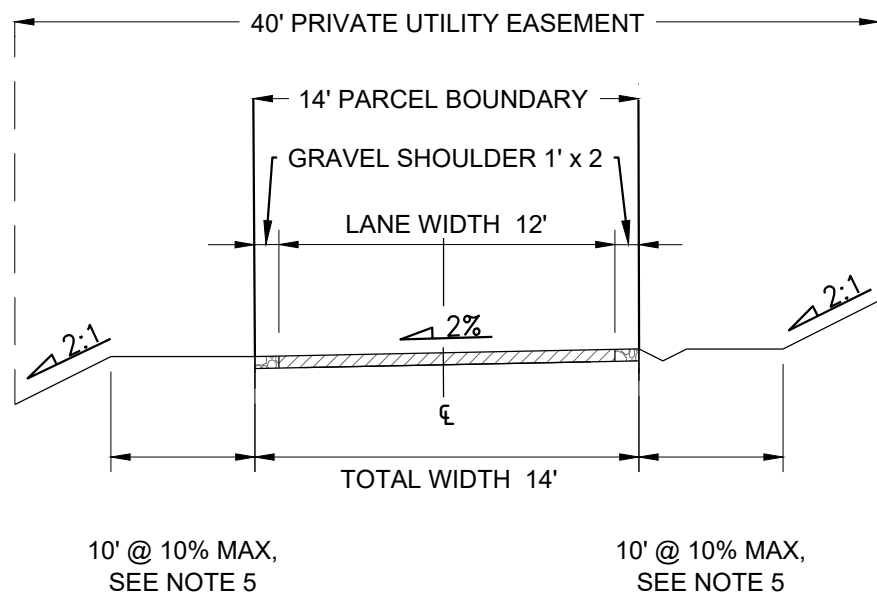

- NOTES:
- SLOPES SHOWN HEREIN REPRESENT TYPICAL OR MAXIMUM CONDITIONS AND ARE SUBJECT TO CHANGE PER PENDING DETAILED ROADWAY DESIGN.
  - EASEMENTS SHOWN HEREIN REPRESENT TYPICAL MINIMUM WIDTH AND COVERAGE SITUATIONS AND ARE SUBJECT TO INCREASING TO ACCOMMODATE SPECIFIC STRUCTURES OR FEATURES TO BE DESIGNED.
  - PLEASE REFER TO THE DESIGN GUIDELINES AS PART OF THE GVD ZONING DESIGNATION FOR ROADWAY DESIGN DETAILS.
  - IN ADDITION TO THE PUE, THERE ARE VEGETATION AND FUEL REDUCTION AREAS 50' ON EITHER SIDE OF THE EDGE OF PAVEMENT. REFER TO THE FIRE MANAGEMENT PLAN.
  - TO THE EXTENT THAT THE TOPOGRAPHY FEASIBLY PERMITS, AN AREA OF APPROXIMATELY 10 FEET ON EACH SIDE OF THE ROADWAYS WILL BE IMPROVED WITH HARDSCAPE.




| SCALE: 0 1"                                                                                       |      |          |
|---------------------------------------------------------------------------------------------------|------|----------|
| Note: If the graphic scale does not equal 1" this sheet has been modified from its original size. |      |          |
| NO                                                                                                | DATE | ISSUANCE |
|                                                                                                   |      |          |

©2025 Sherwood Design Engineers  
The designs and concepts shown are the sole property of Sherwood Design Engineers and may not be used without the prior written consent of Sherwood Design Engineers.

|                    |             |
|--------------------|-------------|
| PROJECT NO. 24-193 |             |
| DATE               | MAY 4, 2026 |
| DRAWN              | TB.EO.SS    |
| CHECKED            | CA.SG       |

ANASU FARMS  
SUBDIVISION  
GUENOC VALLEY  
LAKE COUNTY  
CALIFORNIA



PHASED VESTING  
TENTATIVE MAP  
SUBDIVISION AF

TYPICAL ROAD  
SECTIONS

G1.01



- Grant Deed #2024-005663 - Butts Creek, LLC  
APNs - 013-022-090-000, 013-022-100-000, 013-024-340-000
- Partial Reconveyance #2024-013662 - Bohn Valley 1, LLC  
APNs - 013-022-160-000, 013-022-200-000, 013-022-170-000,  
013-022-210-000, 013-022-220-000, 013-022-230-000

\* As stated in the preliminary title report dated December 3, 2025, compiled by First American Title Insurance Company.

This map illustrates the proposed Butte County Regional Landfill site and its impact on surrounding land. The landfill area is shaded in light gray. Key features include:

- Butts Canyon Rd:** A road running diagonally across the lower portion of the map.
- Parcel Identification:** Numerous parcels are labeled with codes such as 013-023-18, 013-023-06, 013-023-23, 013-023-25, 013-022-19, 013-023-24, 013-023-17, 013-023-22, 013-023-21, 013-022-18, 013-022-17, 013-022-16, 013-022-23, 013-022-22, 013-022-21, 013-022-20, 013-022-19, 013-022-18, 013-022-17, 013-022-16, 013-022-15, 013-022-14, 013-022-13, 013-022-12, 013-022-11, 013-022-10, 013-022-09, 013-022-08, 013-022-07, 013-022-06, 013-022-05, 013-022-04, 013-022-03, 013-022-02, 013-022-01, 013-021-25, 013-021-24, 013-021-23, 013-021-22, 013-021-21, 013-021-20, 013-021-19, 013-021-18, 013-021-17, 013-021-16, 013-021-15, 013-021-14, 013-021-13, 013-021-12, 013-021-11, 013-021-10, 013-021-09, 013-021-08, 013-021-07, 013-021-06, 013-021-05, 013-021-04, 013-021-03, 013-021-02, 013-021-01, 013-020-25, 013-020-24, 013-020-23, 013-020-22, 013-020-21, 013-020-20, 013-020-19, 013-020-18, 013-020-17, 013-020-16, 013-020-15, 013-020-14, 013-020-13, 013-020-12, 013-020-11, 013-020-10, 013-020-09, 013-020-08, 013-020-07, 013-020-06, 013-020-05, 013-020-04, 013-020-03, 013-020-02, 013-020-01, 013-019-25, 013-019-24, 013-019-23, 013-019-22, 013-019-21, 013-019-20, 013-019-19, 013-019-18, 013-019-17, 013-019-16, 013-019-15, 013-019-14, 013-019-13, 013-019-12, 013-019-11, 013-019-10, 013-019-09, 013-019-08, 013-019-07, 013-019-06, 013-019-05, 013-019-04, 013-019-03, 013-019-02, 013-019-01, 013-018-25, 013-018-24, 013-018-23, 013-018-22, 013-018-21, 013-018-20, 013-018-19, 013-018-18, 013-018-17, 013-018-16, 013-018-15, 013-018-14, 013-018-13, 013-018-12, 013-018-11, 013-018-10, 013-018-09, 013-018-08, 013-018-07, 013-018-06, 013-018-05, 013-018-04, 013-018-03, 013-018-02, 013-018-01, 013-017-25, 013-017-24, 013-017-23, 013-017-22, 013-017-21, 013-017-20, 013-017-19, 013-017-18, 013-017-17, 013-017-16, 013-017-15, 013-017-14, 013-017-13, 013-017-12, 013-017-11, 013-017-10, 013-017-09, 013-017-08, 013-017-07, 013-017-06, 013-017-05, 013-017-04, 013-017-03, 013-017-02, 013-017-01, 013-016-25, 013-016-24, 013-016-23, 013-016-22, 013-016-21, 013-016-20, 013-016-19, 013-016-18, 013-016-17, 013-016-16, 013-016-15, 013-016-14, 013-016-13, 013-016-12, 013-016-11, 013-016-10, 013-016-09, 013-016-08, 013-016-07, 013-016-06, 013-016-05, 013-016-04, 013-016-03, 013-016-02, 013-016-01, 013-015-25, 013-015-24, 013-015-23, 013-015-22, 013-015-21, 013-015-20, 013-015-19, 013-015-18, 013-015-17, 013-015-16, 013-015-15, 013-015-14, 013-015-13, 013-015-12, 013-015-11, 013-015-10, 013-015-09, 013-015-08, 013-015-07, 013-015-06, 013-015-05, 013-015-04, 013-015-03, 013-015-02, 013-015-01, 013-014-25, 013-014-24, 013-014-23, 013-014-22, 013-014-21, 013-014-20, 013-014-19, 013-014-18, 013-014-17, 013-014-16, 013-014-15, 013-014-14, 013-014-13, 013-014-12, 013-014-11, 013-014-10, 013-014-09, 013-014-08, 013-014-07, 013-014-06, 013-014-05, 013-014-04, 013-014-03, 013-014-02, 013-014-01, 013-013-25, 013-013-24, 013-013-23, 013-013-22, 013-013-21, 013-013-20, 013-013-19, 013-013-18, 013-013-17, 013-013-16, 013-013-15, 013-013-14, 013-013-13, 013-013-12, 013-013-11, 013-013-10, 013-013-09, 013-013-08, 013-013-07, 013-013-06, 013-013-05, 013-013-04, 013-013-03, 013-013-02, 013-013-01, 013-012-25, 013-012-24, 013-012-23, 013-012-22, 013-012-21, 013-012-20, 013-012-19, 013-012-18, 013-012-17, 013-012-16, 013-012-15, 013-012-14, 013-012-13, 013-012-12, 013-012-11, 013-012-10, 013-012-09, 013-012-08, 013-012-07, 013-012-06, 013-012-05, 013-012-04, 013-012-03, 013-012-02, 013-012-01, 013-011-25, 013-011-24, 013-011-23, 013-011-22, 013-011-21, 013-011-20, 013-011-19, 013-011-18, 013-011-17, 013-011-16, 013-011-15, 013-011-14, 013-011-13, 013-011-12, 013-011-11, 013-011-10, 013-011-09, 013-011-08, 013-011-07, 013-011-06, 013-011-05, 013-011-04, 013-011-03, 013-011-02, 013-011-01, 013-010-25, 013-010-24, 013-010-23, 013-010-22, 013-010-21, 013-010-20, 013-010-19, 013-010-18, 013-010-17, 013-010-16, 013-010-15, 013-010-14, 013-010-13, 013-010-12, 013-010-11, 013-010-10, 013-010-09, 013-010-08, 013-010-07, 013-010-06, 013-010-05, 013-010-04, 0

| PROPOSED PARCEL TYPES |    |
|-----------------------|----|
| VILLA                 | 0  |
| RESORT RESIDENTIAL    | 30 |
| COMMERCIAL            | 1  |
| FACILITY              | 3  |
| GOLF                  | 0  |
| PERIPHERAL            | 6  |


1. SEE SHEET G0.01 FOR GENERAL NOTES.
2. SEE SHEETS G1.00 AND G1.01 FOR MASTER ROAD PLAN AND TYPICAL SECTIONS (USED FOR REFERENCE AND CONTEXT OF FULL BUILDOUT).
3. SEE SHEETS AF1.01 THROUGH AF1.05 FOR DETAILED SUBDIVISION OF PROPOSED ROAD, COMMERCIAL AND RESIDENTIAL PARCELS.
4. SEE SHEETS AF2.00 THROUGH AF2.02 FOR DETAILED PERIPHERAL PARCELS.

©2025 Sherwood Design Engineers  
The designs and concepts shown are the sole property of Sherwood Design Engineers and may not be used without the prior written consent of Sherwood Design Engineers.

---

|             |             |
|-------------|-------------|
| PROJECT NO. | 24-193      |
| DATE        | MAY 4, 2026 |
| DRAWN       | TB,EO,SS    |
| CHECKED     | CA,SG       |

ANASU FARMS  
SUBDIVISION  
GUENOC VALLEY  
LAKE COUNTY  
CALIFORNIA

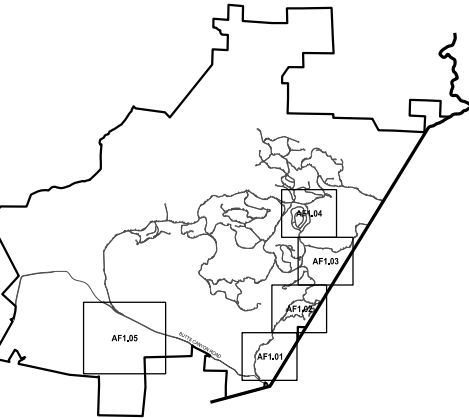

PHASED VESTING  
TENTATIVE MAP  
SUBDIVISION AF

AF OVERALL  
SUBDIVISION  
PLAN


AF1.00





P:\2024\24-193\_MAHA\_PH1A\03\_DESIGN\01\_CAD\01\_TENT MAP\PKG1 - AF1PKG1-AF1.00-OVERALL SUBDIVISION PLAN.DWG, Ellen Obenshain, 5/4/2026 12:11 PM, ANSI\_Tul\_bleed\_D (22.00 x 34.00\_inches)

EXISTING PARCELS

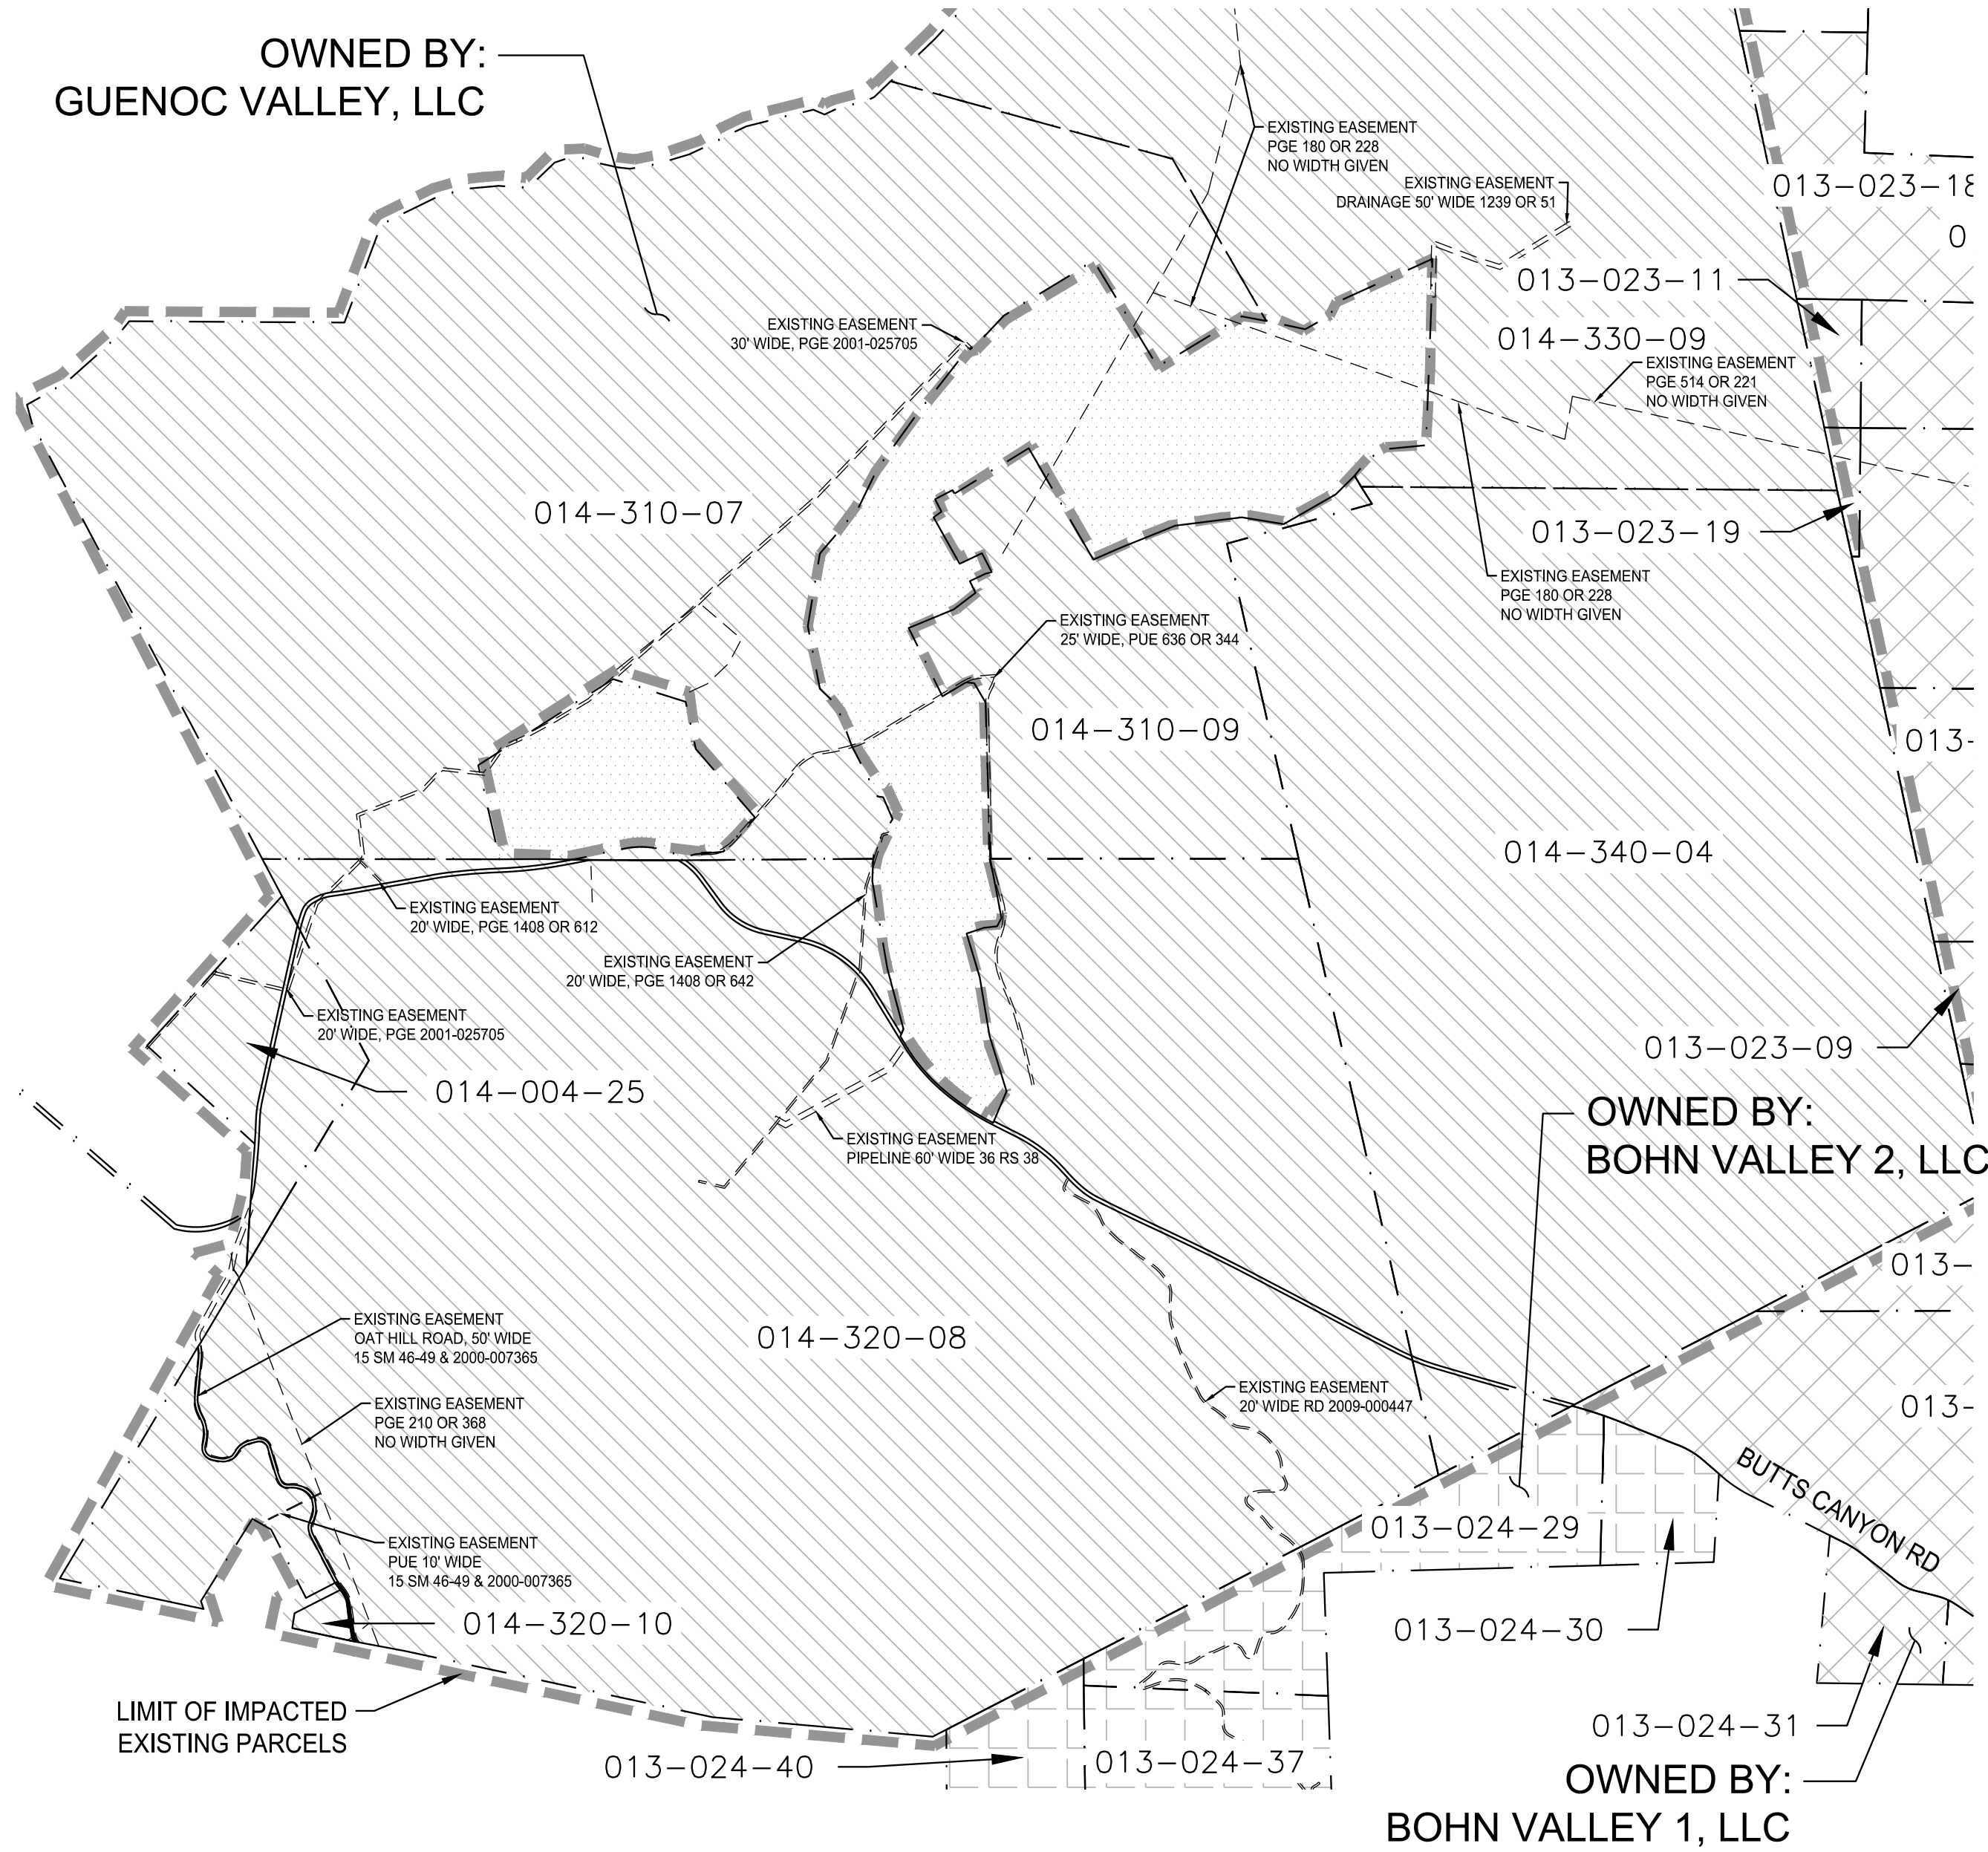


| EXISTING OWNERSHIP INFORMATION |    |          |                                                                                                                                         |                    |                 |
|--------------------------------|----|----------|-----------------------------------------------------------------------------------------------------------------------------------------|--------------------|-----------------|
| Parcel # *                     | CC | CC Doc # | APN                                                                                                                                     | Owner              | Approx. Acreage |
| 10                             |    |          | 014-004-251-000,<br>014-310-071-000,<br>014-310-091-000,<br>014-320-080-000,<br>014-320-100-000,<br>014-330-091-000,<br>014-340-041-000 | Guenoc Valley, LLC | 6,585           |

\* As stated in the preliminary title report dated December 3, 2025, compiled by First American Title Insurance Company.

- Grant Deed #2024-000447 - Guenoc Valley, LLC  
APNs - 014-004-251-000, 014-310-071-000, 014-310-091-000, 014-320-080-000, 014-320-100-000, 014-330-091-000, 014-340-041-000

PROPOSED SUBDIVISION

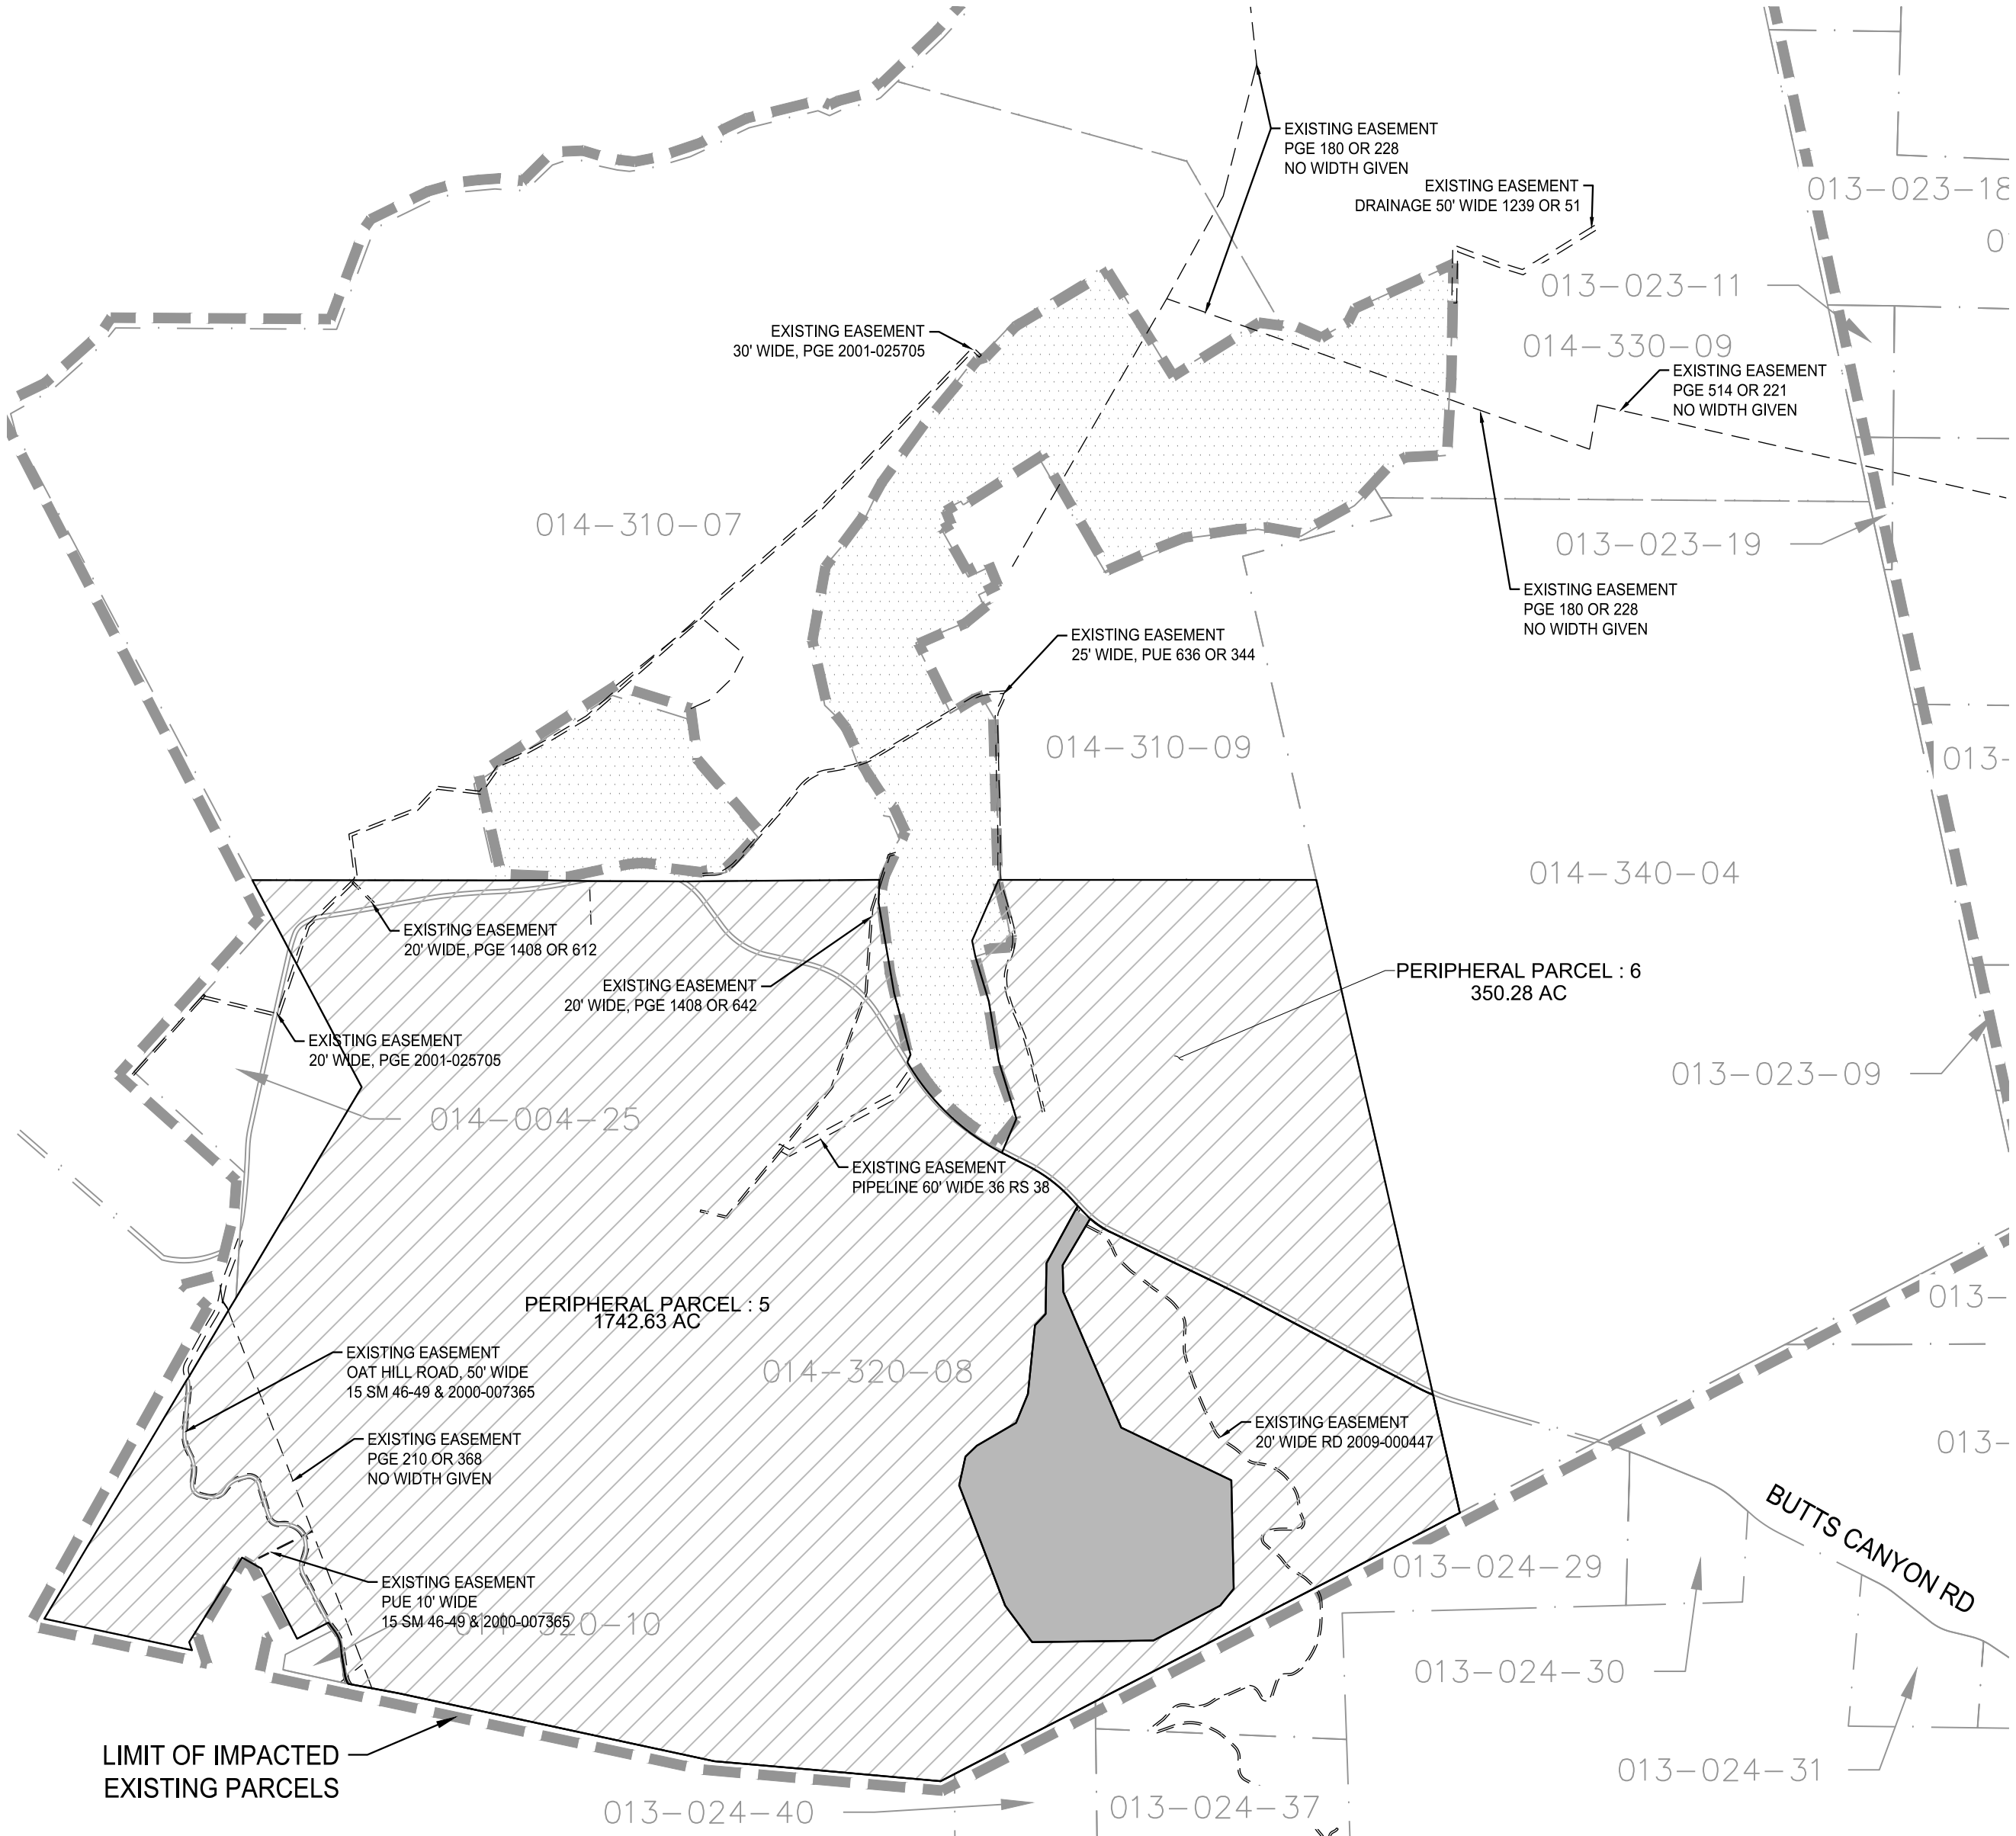

| PROPOSED PARCEL TYPES |    |
|-----------------------|----|
| VILLA                 | 0  |
| RESORT RESIDENTIAL    | 30 |
| COMMERCIAL            | 1  |
| FACILITY              | 3  |
| GOLF                  | 0  |
| PERIPHERAL            | 6  |

- NOTES:**
- SEE SHEET G0.01 FOR GENERAL NOTES.
  - SEE SHEETS G1.00 AND G1.01 FOR MASTER ROAD PLAN AND TYPICAL SECTIONS (USED FOR REFERENCE AND CONTEXT OF FULL BUILDOUT).
  - SEE SHEETS AF1.01 THROUGH AF1.05 FOR DETAILED SUBDIVISION OF PROPOSED ROAD, COMMERCIAL AND RESIDENTIAL PARCELS.
  - SEE SHEETS AF2.00 THROUGH AF2.02 FOR DETAILED PERIPHERAL PARCELS.




| SCALE: 1"=1500'<br>0<br>Note: If the graphic scale does not equal 1", this sheet has been modified from its original size. |      |          |
|----------------------------------------------------------------------------------------------------------------------------|------|----------|
| NO                                                                                                                         | DATE | ISSUANCE |
|                                                                                                                            |      |          |

©2025 Sherwood Design Engineers  
The designs and concepts shown are the sole property of Sherwood Design Engineers and may not be used without the prior written consent of Sherwood Design Engineers.

PROJECT NO. 24-193

DATE MAY 4, 2026  
DRAWN TB.EO.SS  
CHECKED CA.SG

**ANASU FARMS  
SUBDIVISION**  
GUENOC VALLEY  
LAKE COUNTY  
CALIFORNIA

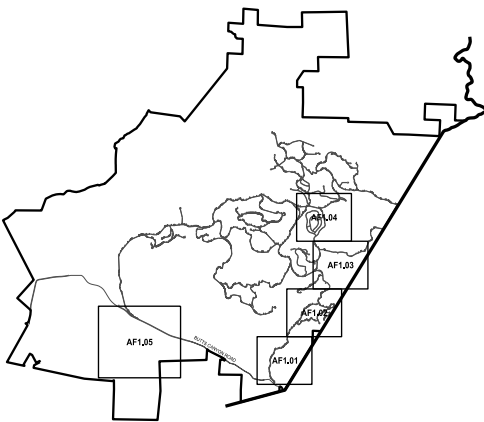

**PHASED VESTING  
TENTATIVE MAP  
SUBDIVISION AF**

**AF OVERALL  
SUBDIVISION  
PLAN**

**AF1.00A**





SCALE: 1"=200'

0  1"


Note: If this graphic scale does not equal 1", this sheet has been modified from its original size.

| NO | DATE | ISSUANCE |
|----|------|----------|
|    |      |          |

©2025 Sherwood Design Engineers  
The designs and concepts shown are the sole property of  
Sherwood Design Engineers and may not be used without  
the prior written consent of Sherwood Design Engineers.

|             |             |
|-------------|-------------|
| PROJECT NO. | 24-193      |
| DATE        | MAY 4, 2026 |
| DRAWN       | TB,EO,SS    |
| CHECKED     | CA,SG       |

ANASU FARMS  
SUBDIVISION  
GUENOC VALLEY  
LAKE COUNTY  
CALIFORNIA

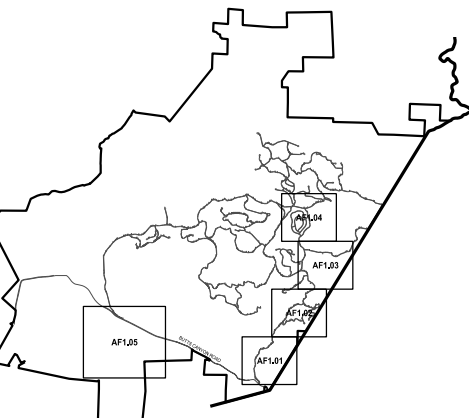


PHASED VESTING  
TENTATIVE MAP  
SUBDIVISION AF

AF  
SUBDIVISION  
PLAN

# AF1.01

| LEGEND                                            |  |                                |  |
|---------------------------------------------------|--|--------------------------------|--|
| PARCEL BOUNDARY                                   |  |                                |  |
| ROADWAY                                           |  |                                |  |
| CUL-DE-SAC                                        |  |                                |  |
| COUNTY LINE                                       |  |                                |  |
| CULVERT                                           |  | WASTE WATER TREATMENT FACILITY |  |
| BRIDGE                                            |  | WATER PUMP                     |  |
| WATER TANK                                        |  | FIRE HYDRANT                   |  |
| GROUND WATER WELL                                 |  | FIRE TANK                      |  |
| ELECTRICAL SUBSTATION                             |  | EXISTING POWER POLE            |  |
| EXISTING PG&E POLE LINE EASEMENT (NO WIDTH GIVEN) |  |                                |  |
| EASEMENT                                          |  |                                |  |
| EPHEMERAL STREAMS                                 |  |                                |  |
| ORDINARY HIGH WATER MARK                          |  |                                |  |
| INTERMITTENT TOP OF BANK                          |  |                                |  |
| PERENNIAL TOP OF BANK                             |  |                                |  |
| EXISTING PARCEL BOUNDARY                          |  |                                |  |
| EPHEMERAL STREAM SETBACK                          |  |                                |  |

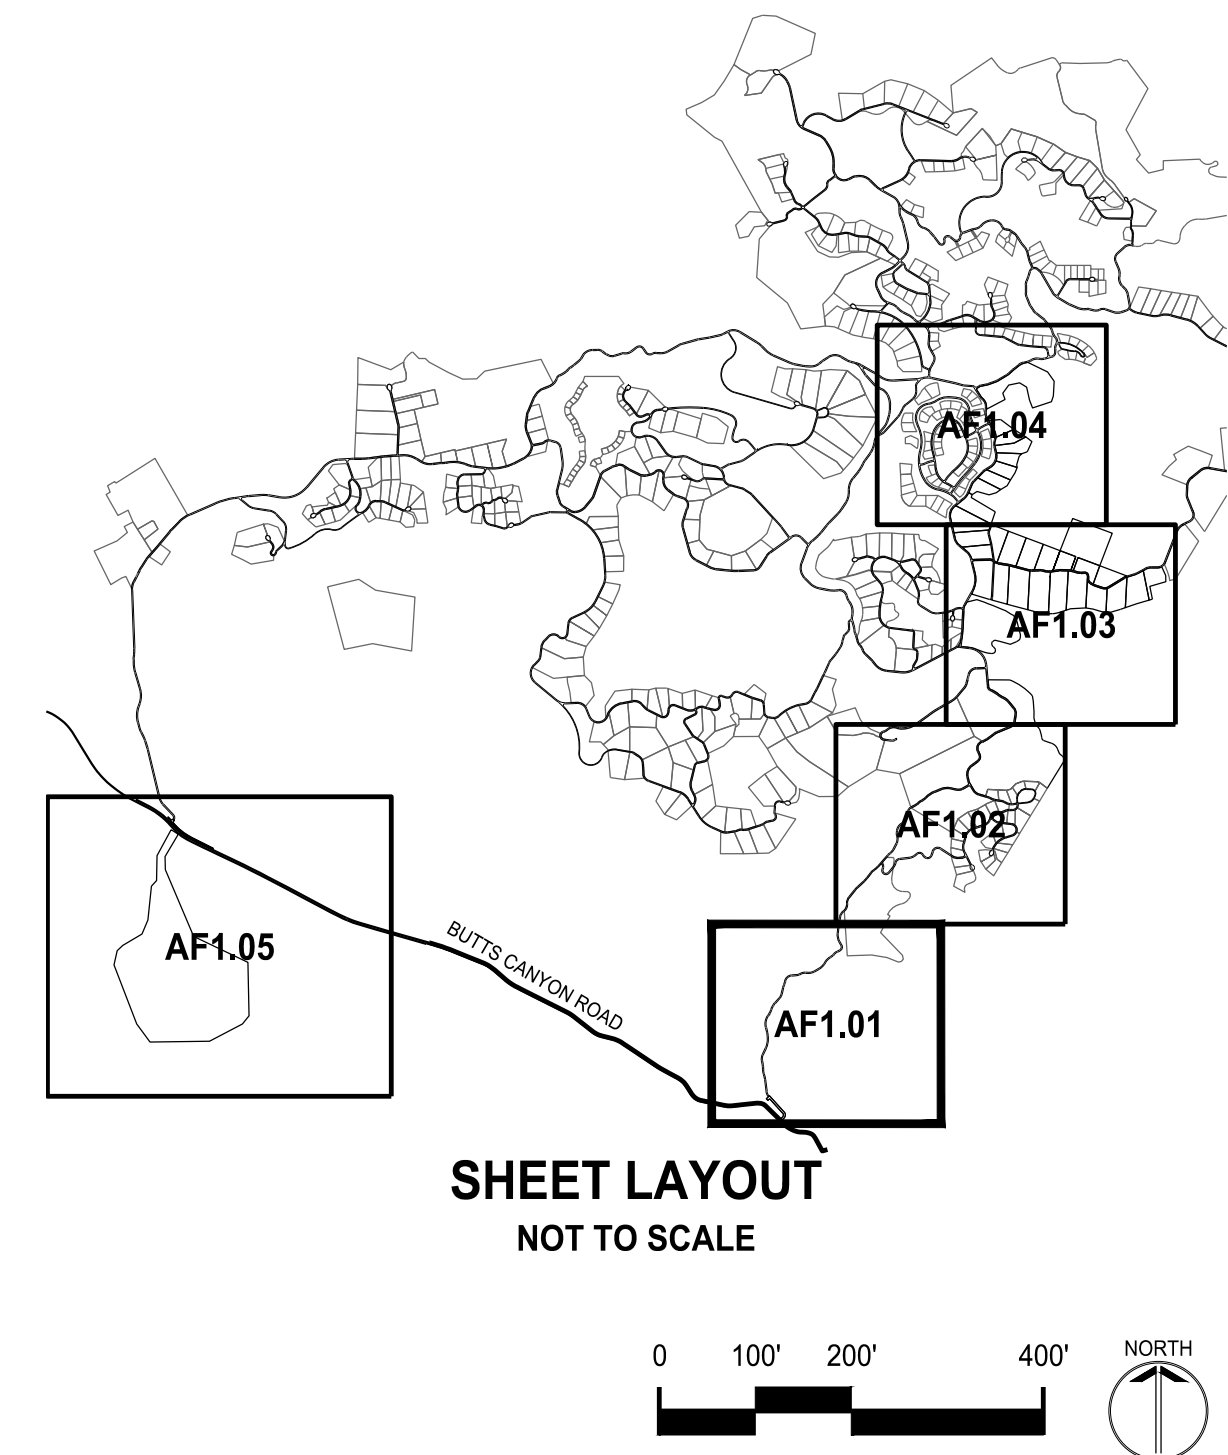

| PARCEL LINE AND CURVE TABLE |        |                  |        |
|-----------------------------|--------|------------------|--------|
| LINE#/CURVE#                | LENGTH | BEARING/DELTA    | RADIUS |
| C865                        | 136.99 | 87.21            | 90.00  |
| C866                        | 76.10  | 87.21            | 50.00  |
| L1015                       | 90.00  | N47° 41' 39.66"E |        |
| L1016                       | 50.00  | N42° 18' 20.34"W |        |
| L1017                       | 50.00  | S47° 41' 39.66"W |        |
| L1018                       | 409.68 | N42° 18' 20.34"W |        |
| L1019                       | 459.68 | S42° 18' 20.34"E |        |
| L1020                       | 51.53  | S44° 56' 03.03"W |        |
| L1021                       | 51.51  | N44° 56' 03.05"E |        |
| L1022                       | 40.00  | N45° 03' 56.97"W |        |




P:\2024\24-193\_MAHA\_PH1A\03\_DESIGN\01\_CAD\01\_TENT MAP\PKG1 - AF1\01-AF SUBDIVISION PLAN.DWG Ellen Obenshain 5/4/2026 11:34 AM ANS\full\_bleed\_D\_(22.00 x 34.00\_inches)



**LEGEND**

|                                                   |  |
|---------------------------------------------------|--|
| PARCEL BOUNDARY                                   |  |
| ROADWAY                                           |  |
| CUL-DE-SAC                                        |  |
| COUNTY LINE                                       |  |
| CULVERT                                           |  |
| BRIDGE                                            |  |
| WATER TANK                                        |  |
| GROUND WATER WELL                                 |  |
| ELECTRICAL SUBSTATION                             |  |
| EXISTING PG&E POLE LINE EASEMENT (NO WIDTH GIVEN) |  |
| EASEMENT                                          |  |
| EPHEMERAL STREAMS                                 |  |
| ORDINARY HIGH WATER MARK                          |  |
| INTERMITTENT TOP OF BANK                          |  |
| PERENNIAL TOP OF BANK                             |  |
| EXISTING PARCEL BOUNDARY                          |  |
| EPHEMERAL STREAM SETBACK                          |  |
| BUILDING ENVELOPE                                 |  |

|                                |  |
|--------------------------------|--|
| WASTE WATER TREATMENT FACILITY |  |
| WATER PUMP                     |  |
| FIRE HYDRANT                   |  |
| FIRE TANK                      |  |
| EXISTING POWER POLE            |  |

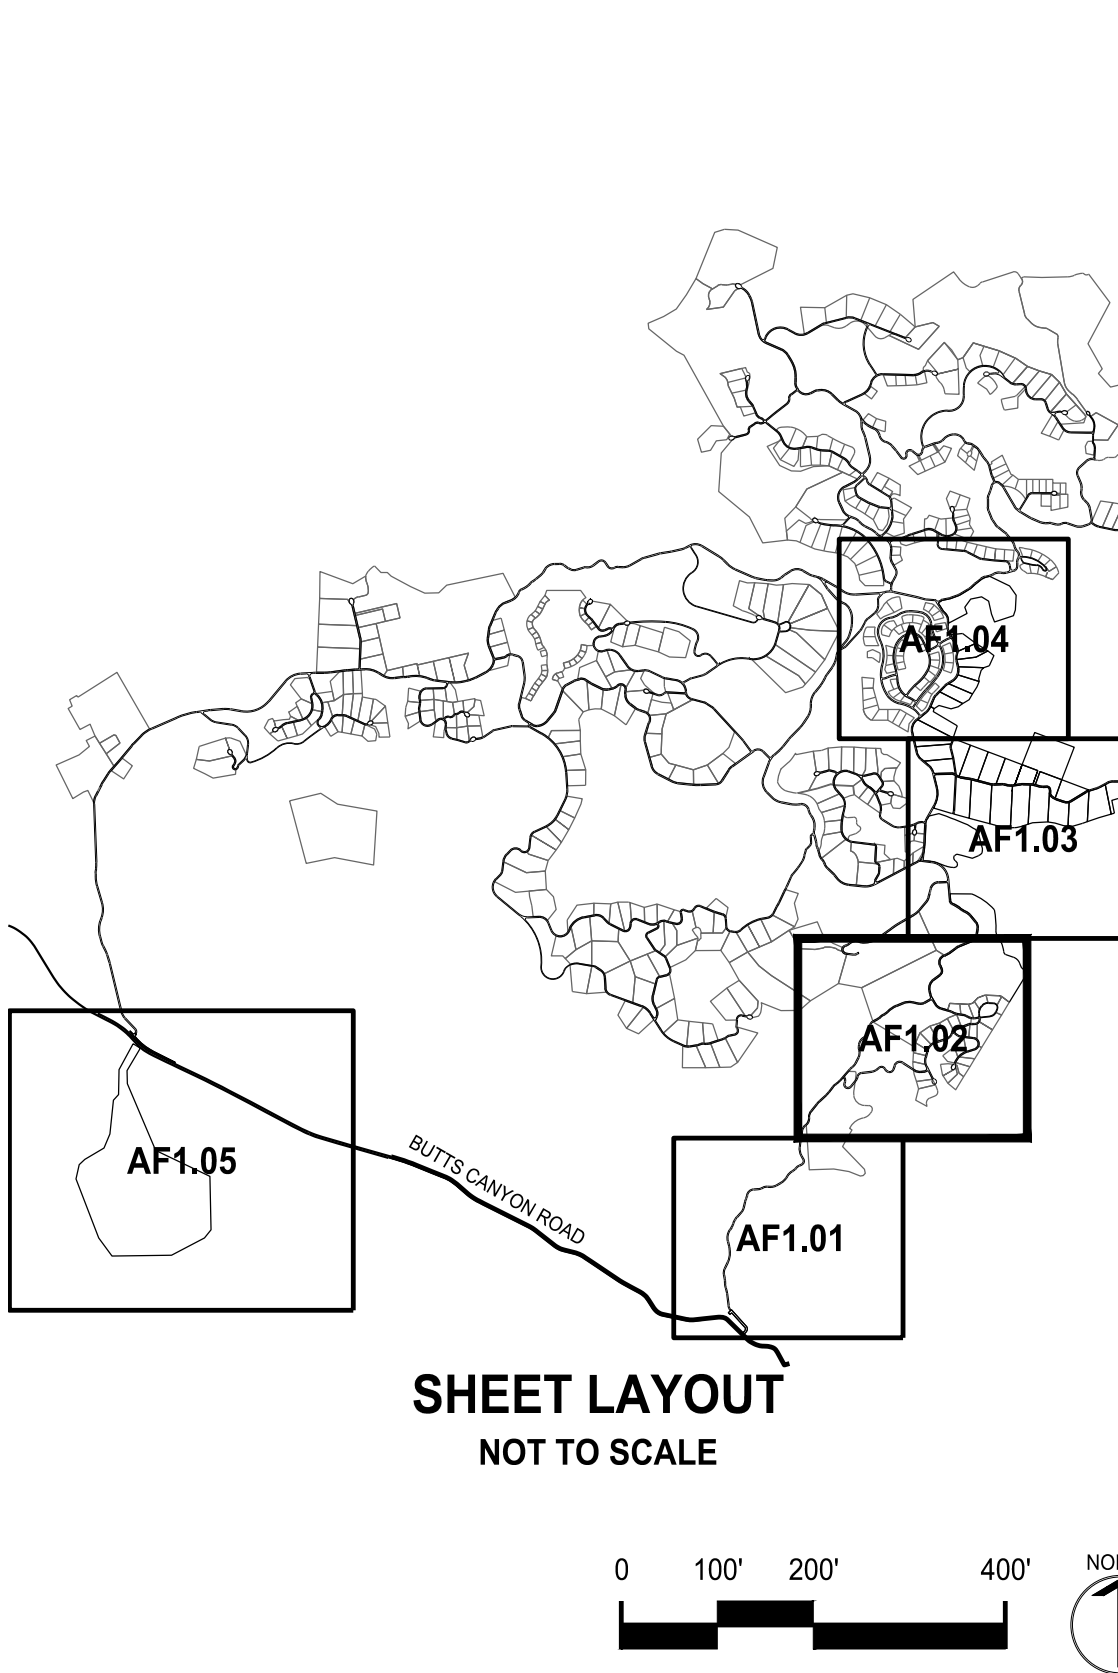


| SCALE: 1"=200'                                                                                          |      |          |
|---------------------------------------------------------------------------------------------------------|------|----------|
| Note: If the graphic scale does not equal 1"=200', this sheet has been modified from its original size. |      |          |
| NO                                                                                                      | DATE | ISSUANCE |
|                                                                                                         |      |          |

©2025 Sherwood Design Engineers  
The designs and concepts shown are the sole property of Sherwood Design Engineers and may not be used without the prior written consent of Sherwood Design Engineers.

PROJECT NO. 24-193

DATE MAY 4, 2026  
DRAWN TB.EO.SS  
CHECKED CA.SG

**ANASU FARMS  
SUBDIVISION**  
GUENOC VALLEY  
LAKE COUNTY  
CALIFORNIA

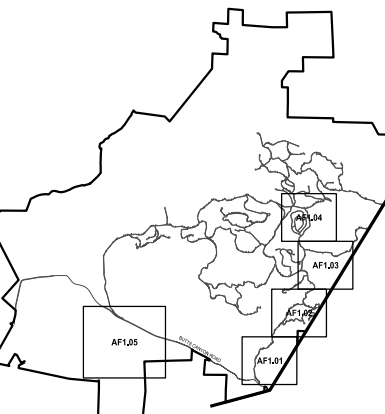

**PHASED VESTING  
TENTATIVE MAP  
SUBDIVISION AF**

**AF  
SUBDIVISION  
PLAN**

**AF1.02**





LEGEND

PARCEL BOUNDARY

ROADWAY

CUL-DE-SAC

COUNTY LINE

CULVERT

BRIDGE

WATER TANK

GROUND WATER WELL

ELECTRICAL SUBSTATION

EXISTING PG&E POLE LINE EASEMENT (NO WIDTH GIVEN)

EASEMENT

EPHEMERAL STREAMS

ORDINARY HIGH WATER MARK

INTERMITTENT TOP OF BANK

PERENNIAL TOP OF BANK

EXISTING PARCEL BOUNDARY

EPHEMERAL STREAM SETBACK

BUILDING ENVELOPE

WASTE WATER TREATMENT FACILITY

WATER PUMP

FIRE HYDRANT

FIRE TANK

EXISTING POWER POLE

WW

W

WELL

ELC

+

0 100' 200' 400'

NORTH

AF1.05

AF1.04

AF1.03

AF1.02

AF1.01

BUTTS CANYON ROAD

SHEET LAYOUT  
NOT TO SCALE

0 100' 200' 400'

NORTH

**SHERWOOD**  
DESIGN ENGINEERS  
2548 Mission Street  
San Francisco, CA 94110  
www.sherwoodengineers.com

REGISTERED PROFESSIONAL ENGINEER  
EXP. 9/30/27  
NO. 59470  
CIVIL  
STATE OF CALIFORNIA

SCALE: 1"=200'  
0  
Note: If the graphic scale does not equal 1"=200' this sheet has been modified from its original size.

| NO | DATE | ISSUANCE |
|----|------|----------|
|    |      |          |

©2025 Sherwood Design Engineers  
The designs and concepts shown are the sole property of Sherwood Design Engineers and may not be used without the prior written consent of Sherwood Design Engineers.

PROJECT NO. 24-193

DATE MAY 4, 2026

DRAWN TB.EO.SS

CHECKED CA.SG

**ANASU FARMS**  
**SUBDIVISION**  
GUENOC VALLEY  
LAKE COUNTY  
CALIFORNIA

PHASED VESTING  
TENTATIVE MAP  
SUBDIVISION AF

AF  
SUBDIVISION  
PLAN


**AF1.03**



P:\2024\24-193\_MAHA\_PH1A\03\_DESIGN\01\_CAD\01\_TENT MAP\PKG1 - AF\PKG1-AF1.01-AF SUBDIVISION PLAN.DWG Ellen Obenshain 5/4/2026 11:39 AM ANSI full\_bleed\_D\_(22.00 x 34.00\_inches)




|                                                   |  |
|---------------------------------------------------|--|
| LEGEND                                            |  |
| PARCEL BOUNDARY                                   |  |
| ROADWAY                                           |  |
| CUL-DE-SAC                                        |  |
| COUNTY LINE                                       |  |
| CULVERT                                           |  |
| BRIDGE                                            |  |
| WATER TANK                                        |  |
| GROUND WATER WELL                                 |  |
| ELECTRICAL SUBSTATION                             |  |
| EXISTING PG&E POLE LINE EASEMENT (NO WIDTH GIVEN) |  |
| EASEMENT                                          |  |
| EPHEMERAL STREAMS                                 |  |
| ORDINARY HIGH WATER MARK                          |  |
| INTERMITTENT TOP OF BANK                          |  |
| PERENNIAL TOP OF BANK                             |  |
| EXISTING PARCEL BOUNDARY                          |  |
| EPHEMERAL STREAM SETBACK                          |  |
| WASTE WATER TREATMENT FACILITY                    |  |
| WATER PUMP                                        |  |
| FIRE HYDRANT                                      |  |
| FIRE TANK                                         |  |
| EXISTING POWER POLE                               |  |

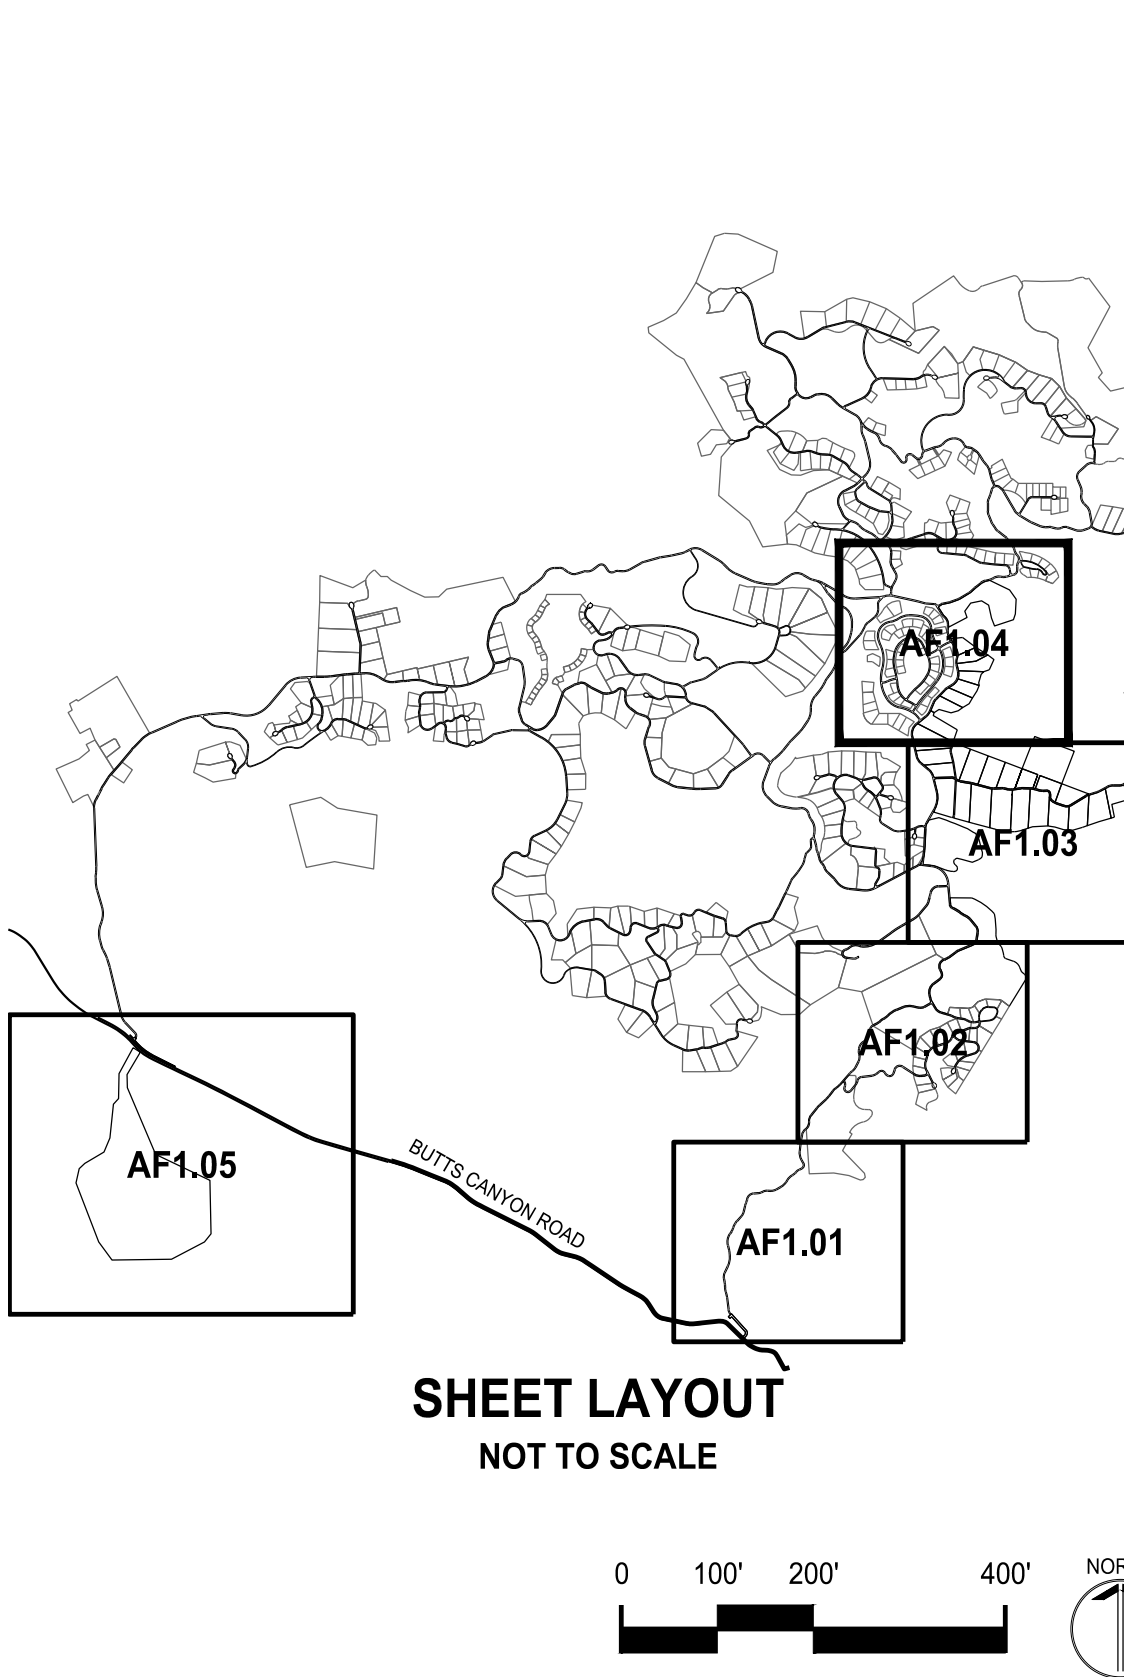

| SCALE: 1"=200'                                                                                          |      |          |
|---------------------------------------------------------------------------------------------------------|------|----------|
| Note: If the graphic scale does not equal 1"=200', this sheet has been modified from its original size. |      |          |
| NO                                                                                                      | DATE | ISSUANCE |
|                                                                                                         |      |          |

|                                                                                                                                                                                                          |             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| ©2025 Sherwood Design Engineers<br>The designs and concepts shown are the sole property of Sherwood Design Engineers and may not be used without the prior written consent of Sherwood Design Engineers. |             |
| PROJECT NO. 24-193                                                                                                                                                                                       |             |
| DATE                                                                                                                                                                                                     | MAY 4, 2026 |
| DRAWN                                                                                                                                                                                                    | TB.EO.SS    |
| CHECKED                                                                                                                                                                                                  | CA.SG       |

**ANASU FARMS  
SUBDIVISION**  
GUENOC VALLEY  
LAKE COUNTY  
CALIFORNIA


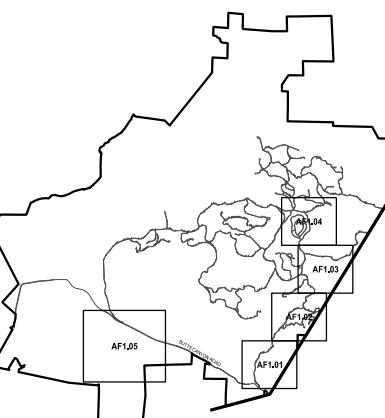


**PHASED VESTING  
TENTATIVE MAP  
SUBDIVISION AF**

**AF  
SUBDIVISION  
PLAN**

**AF1.04**



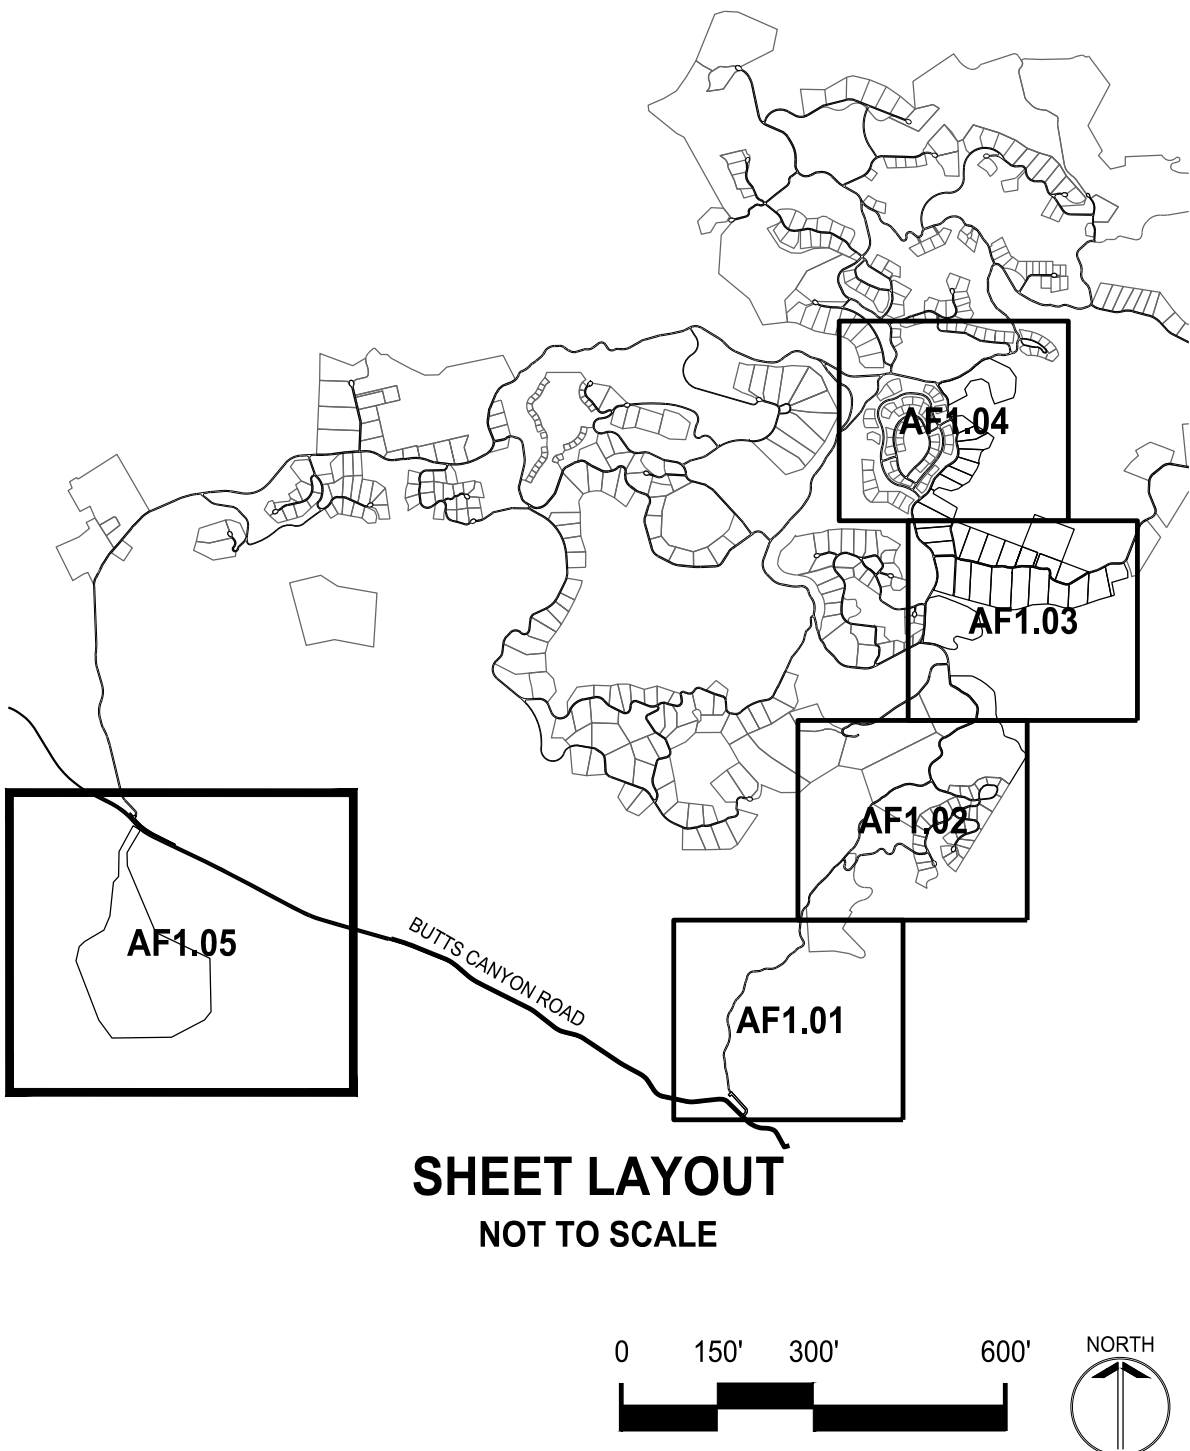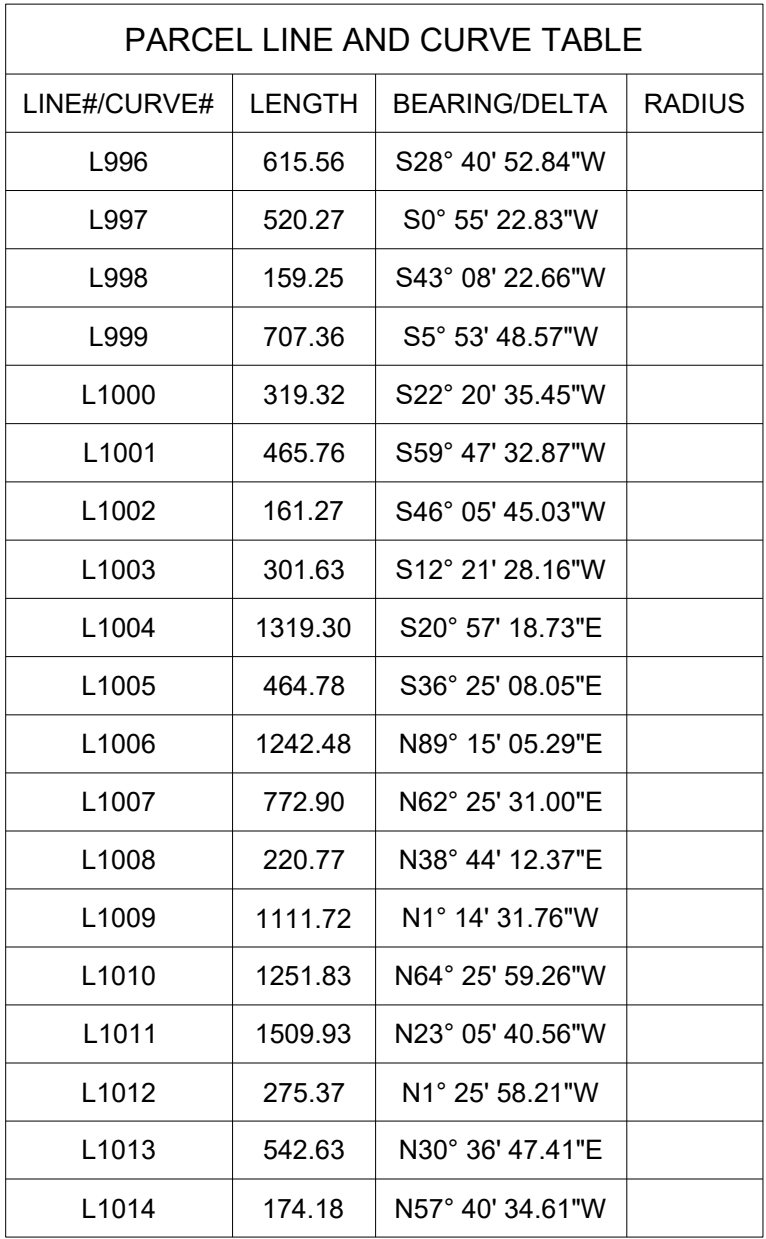

| LEGEND                                                  |  |                                |  |
|---------------------------------------------------------|--|--------------------------------|--|
| PARCEL BOUNDARY                                         |  |                                |  |
| ROADWAY                                                 |  |                                |  |
| CUL-DE-SAC                                              |  |                                |  |
| COUNTY LINE                                             |  |                                |  |
| CULVERT                                                 |  | WASTE WATER TREATMENT FACILITY |  |
| BRIDGE                                                  |  | WATER PUMP                     |  |
| WATER TANK                                              |  | FIRE HYDRANT                   |  |
| GROUND WATER WELL                                       |  | FIRE TANK                      |  |
| ELECTRICAL SUBSTATION                                   |  | EXISTING POWER POLE            |  |
| EXISTING PG&E POLE<br>LINE EASEMENT<br>(NO WIDTH GIVEN) |  |                                |  |
| EASEMENT                                                |  |                                |  |
| EPHEMERAL STREAMS                                       |  |                                |  |
| ORDINARY HIGH<br>WATER MARK                             |  |                                |  |
| INTERMITTENT<br>TOP OF BANK                             |  |                                |  |
| PERENNIAL<br>TOP OF BANK                                |  |                                |  |
| EXISTING<br>PARCEL BOUNDARY                             |  |                                |  |
| EPHEMERAL<br>STREAM SETBACK                             |  |                                |  |

SCALE: 1"=200'

0 1"

Note: If this graphic scale does not equal 1", this sheet has been modified from its original size.

| NO | DATE | ISSUANCE |
|----|------|----------|
|    |      |          |

©2025 Sherwood Design Engineers  
The designs and concepts shown are the sole property of  
Sherwood Design Engineers and may not be used without  
the prior written consent of Sherwood Design Engineers.

---

**PROJECT NO. 24-193**


---

DATE MAY 4, 2026

DRAWN TB,EO,SS

CHECKED CA,SG

ANASU FARMS  
SUBDIVISION  
GUENOC VALLEY  
LAKE COUNTY  
CALIFORNIA

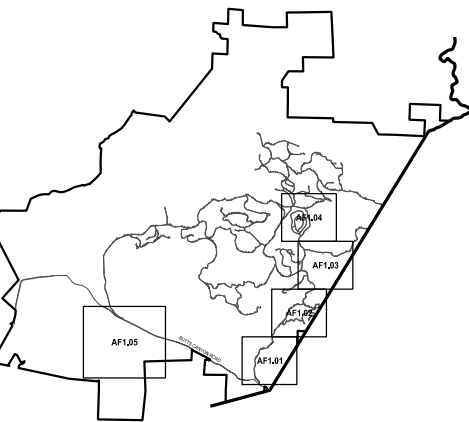

PHASED VESTING  
TENTATIVE MAP  
SUBDIVISION AF

AF  
SUBDIVISION  
PLAN

## AF1.05



P:\2024\24-193\_MAHA\_PH1A\03\_DESIGN\01\_CAD\01\_TENT MAP\PKG1 - AF101-AF SUBDIVISION PLAN.DWG, Ellen Obenshain, 5/4/2026 11:41 AM, ANS\_Jul\_Bleed\_D\_ (22.00 x 34.00 Inches)

| PARCEL LINE AND CURVE TABLE |        |                  |        |
|-----------------------------|--------|------------------|--------|
| LINE#/CURVE#                | LENGTH | BEARING/DELTA    | RADIUS |
| C908                        | 199.18 | 15.83            | 721.12 |
| C909                        | 74.33  | 68.58            | 62.10  |
| C910                        | 179.50 | 48.50            | 212.05 |
| C911                        | 91.15  | 19.93            | 262.12 |
| C912                        | 89.14  | 23.02            | 221.87 |
| C913                        | 139.65 | 42.34            | 188.98 |
| C914                        | 75.41  | 18.23            | 237.00 |
| C915                        | 245.82 | 64.91            | 217.00 |
| C916                        | 151.16 | 76.64            | 113.00 |
| C917                        | 224.77 | 94.00            | 137.00 |
| C918                        | 79.08  | 17.23            | 263.00 |
| C919                        | 57.99  | 14.02            | 237.00 |
| C920                        | 130.30 | 59.25            | 126.00 |
| L667                        | 172.38 | S70° 40' 14.79"E |        |
| L669                        | 92.79  | S21° 26' 39.35"E |        |
| L672                        | 701.05 | S31° 29' 28.81"W |        |
| L673                        | 200.62 | N52° 13' 36.70"W |        |
| L674                        | 51.44  | N73° 33' 03.61"W |        |
| L675                        | 275.95 | N87° 34' 59.07"W |        |
| L676                        | 40.07  | S85° 44' 04.74"W |        |
| L677                        | 139.82 | S68° 03' 50.94"W |        |
| L678                        | 158.10 | S44° 48' 38.40"W |        |
| L679                        | 88.31  | S75° 14' 31.65"W |        |
| L680                        | 180.70 | N87° 25' 03.00"W |        |
| L681                        | 211.46 | N87° 01' 21.61"W |        |
| L682                        | 142.99 | S17° 04' 32.66"W |        |
| L683                        | 140.72 | N74° 08' 33.47"W |        |
| L685                        | 158.23 | N30° 20' 40.82"W |        |
| L687                        | 76.68  | N11° 45' 36.34"W |        |
| L689                        | 168.19 | N53° 08' 44.48"E |        |
| L691                        | 86.16  | N23° 29' 56.16"W |        |
| L693                        | 31.30  | N70° 30' 14.79"E |        |
| L695                        | 194.19 | N53° 16' 36.95"E |        |
| L697                        | 71.58  | N67° 17' 44.98"E |        |
| L698                        | 253.59 | N67° 17' 44.98"E |        |

| PARCEL LINE AND CURVE TABLE |        |               |         |
|-----------------------------|--------|---------------|---------|
| LINE#/CURVE#                | LENGTH | BEARING/DELTA | RADIUS  |
| C905                        | 582.68 | 26.54         | 1258.09 |
| C906                        | 443.95 | 12.70         | 2003.46 |
| C907                        | 274.08 | 41.12         | 381.93  |
| C920                        | 130.30 | 59.25         | 126.00  |
| C921                        | 146.44 | 47.67         | 176.00  |
| C922                        | 83.41  | 18.74         | 255.00  |
| C923                        | 68.49  | 53.03         | 74.00   |
| C924                        | 116.63 | 16.79         | 398.00  |
| C926                        | 47.12  | 90.00         | 30.00   |
| C928                        | 67.90  | 3.89          | 1000.00 |
| C930                        | 110.30 | 26.67         | 237.00  |
| C945                        | 96.94  | 44.60         | 124.55  |
| C953                        | 113.50 | 84.63         | 76.84   |
| C956                        | 111.53 | 103.12        | 61.97   |
| C958                        | 165.23 | 22.92         | 413.08  |
| C961                        | 76.80  | 33.35         | 131.93  |
| C962                        | 152.31 | 36.82         | 237.00  |
| C963                        | 163.35 | 35.59         | 263.00  |
| C964                        | 47.12  | 77.14         | 35.00   |
| C965                        | 82.03  | 28.84         | 163.00  |
| C966                        | 2.45   | 17.51         | 8.00    |
| C967                        | 88.62  | 37.06         | 137.00  |
| C968                        | 62.61  | 102.49        | 35.00   |
| C969                        | 387.19 | 43.24         | 513.00  |
| C970                        | 9.17   | 17.51         | 30.00   |
| C971                        | 13.44  | 5.62          | 137.00  |
| C972                        | 82.44  | 28.98         | 163.00  |
| C973                        | 39.93  | 8.70          | 263.00  |
| C974                        | 189.93 | 9.55          | 1139.74 |
| C975                        | 160.03 | 7.81          | 1174.19 |
| C976                        | 94.49  | 20.58         | 263.00  |
| C977                        | 35.74  | 14.95         | 137.00  |
| C978                        | 38.50  | 8.39          | 263.00  |
| C979                        | 92.83  | 4.53          | 1174.19 |
| C980                        | 166.38 | 17.85         | 533.92  |
| C981                        | 38.31  | 9.26          | 237.00  |
| C982                        | 82.38  | 14.01         | 337.00  |
| C983                        | 52.84  | 18.57         | 163.00  |
| C984                        | 100.90 | 93.25         | 62.00   |
| C985                        | 101.73 | 35.76         | 163.00  |
| C986                        | 139.16 | 11.18         | 713.00  |
| C987                        | 119.87 | 60.78         | 113.00  |
| C988                        | 38.85  | 13.66         | 163.00  |
| C990                        | 58.37  | 14.11         | 237.00  |
| C997                        | 83.35  | 29.30         | 163.00  |
| C998                        | 118.17 | 28.57         | 237.00  |
| C999                        | 51.36  | 11.19         | 263.00  |
| C1000                       | 64.77  | 14.11         | 263.00  |
| C1001                       | 118.16 | 49.42         | 137.00  |
| C1002                       | 98.01  | 8.17          | 687.00  |
| C1003                       | 36.07  | 3.01          | 687.00  |
| C1005                       | 92.29  | 60.78         | 87.00   |
| C1007                       | 143.22 | 93.25         | 88.00   |

| PARCEL LINE AND CURVE TABLE |        |                  |        |
|-----------------------------|--------|------------------|--------|
| LINE#/CURVE#                | LENGTH | BEARING/DELTA    | RADIUS |
| C1009                       | 44.41  | 18.57            | 137.00 |
| C1014                       | 36.28  | 5.73             | 363.00 |
| C1015                       | 42.51  | 9.26             | 263.00 |
| C1016                       | 52.46  | 8.28             | 363.00 |
| C1017                       | 85.15  | 20.58            | 237.00 |
| C1018                       | 42.53  | 14.95            | 163.00 |
| C1019                       | 70.67  | 17.09            | 237.00 |
| C1020                       | 15.99  | 5.62             | 163.00 |
| C1021                       | 22.18  | 9.28             | 137.00 |
| C1022                       | 55.39  | 23.16            | 137.00 |
| C1024                       | 11.17  | 3.93             | 163.00 |
| C1027                       | 63.73  | 33.22            | 109.91 |
| L661                        | 448.99 | S89° 36' 23.94"E |        |
| L700                        | 164.56 | N8° 02' 47.51"E  |        |
| L702                        | 174.53 | N39° 37' 35.03"W |        |
| L704                        | 381.73 | N58° 22' 01.52"W |        |
| L706                        | 139.83 | N5° 20' 02.03"W  |        |
| L707                        | 152.34 | N83° 27' 39.54"W |        |
| L708                        | 265.45 | N6° 32' 33.49"E  |        |
| L709                        | 399.27 | N2° 39' 07.59"E  |        |
| L710                        | 68.25  | N29° 19' 07.50"E |        |
| L711                        | 210.92 | N76° 32' 31.75"E |        |
| L712                        | 167.11 | S71° 52' 34.84"E |        |
| L713                        | 92.06  | S67° 14' 51.42"E |        |
| L714                        | 99.30  | S68° 55' 38.95"E |        |
| L715                        | 199.20 | S67° 51' 05.73"E |        |
| L716                        | 82.50  | S67° 58' 57.99"E |        |
| L717                        | 137.88 | S58° 20' 37.78"E |        |
| L718                        | 60.01  | S63° 44' 55.60"E |        |
| L719                        | 145.93 | S27° 47' 12.87"E |        |
| L720                        | 193.07 | S14° 09' 01.97"E |        |
| L721                        | 80.28  | S15° 59' 49.54"E |        |
| L722                        | 39.88  | S3° 22' 47.35"E  |        |
| L723                        | 55.06  | S6° 50' 38.45"W  |        |
| L724                        | 138.97 | S66° 24' 30.70"W |        |
| L725                        | 225.15 | N74° 32' 13.28"W |        |
| L726                        | 88.44  | N75° 34' 35.48"W |        |
| L727                        | 14.47  | N85° 59' 22.54"W |        |
| L728                        | 17.33  | S79° 49' 02.03"W |        |
| L729                        | 24.68  | S62° 02' 55.23"W |        |
| L730                        | 20.99  | S50° 45' 57.77"W |        |
| L731                        | 60.91  | S40° 02' 55.21"E |        |
| L732                        | 10.87  | S24° 22' 40.96"E |        |
| L733                        | 43.43  | S86° 30' 49.67"W |        |
| L734                        | 180.53 | N69° 38' 33.90"W |        |
| L735                        | 728.31 | N85° 35' 37.50"E |        |
| L736                        | 135.80 | N19° 58' 54.86"E |        |
| L740                        | 297.52 | S13° 03' 40.26"E |        |
| L741                        | 600.67 | N84° 26' 19.69"E |        |
| L742                        | 213.65 | N13° 53' 44.72"W |        |
| L744                        | 15.82  | N19° 58' 54.94"E |        |
| L746                        | 123.16 | S13° 03' 40.26"E |        |
| L748                        | 81.25  | S49° 53' 01.22"E |        |

| PARCEL LINE AND CURVE TABLE |        |                  |        |
|-----------------------------|--------|------------------|--------|
| LINE#/CURVE#                | LENGTH | BEARING/DELTA    | RADIUS |
| L749                        | 327.25 | N8° 38' 48.79"W  |        |
| L751                        | 144.60 | S49° 53' 01.22"E |        |
| L754                        | 337.21 | N88° 33' 39.80"E |        |
| L756                        | 0.16   | N27° 23' 47.21"E |        |
| L757                        | 395.01 | S73° 14' 40.36"E |        |
| L758                        | 18.77  | S74° 33' 37.17"E |        |
| L759                        | 52.64  | N20° 30' 50.20"E |        |
| L761                        | 744.40 | N3° 00' 00.00"E  |        |
| L763                        | 315.95 | S88° 33' 39.80"W |        |
| L765                        | 233.49 | S13° 55' 31.35"E |        |
| L767                        | 56.39  | S29° 19' 07.50"W |        |
| L768                        | 728.16 | S3° 00' 00.00"W  |        |
| L770                        | 50.69  | S20° 30' 50.20"W |        |
| L771                        | 339.74 | S74° 33' 37.17"E |        |
| L772                        | 803.17 | N3° 00' 00.00"E  |        |
| L774                        | 226.90 | N80° 46' 43.99"W |        |
| L777                        | 98.22  | S74° 33' 37.17"E |        |
| L778                        | 342.40 | S75° 04' 39.54"E |        |
| L779                        | 807.79 | N3° 00' 00.00"E  |        |
| L781                        | 399.90 | N75° 09' 24.64"W |        |
| L783                        | 88.53  | S75° 04' 39.54"E |        |
| L786                        | 866.95 | N3° 00' 00.00"E  |        |
| L787                        | 1.01   | S82° 07' 18.56"W |        |
| L789                        | 95.27  | N77° 17' 37.20"W |        |
| L791                        | 170.58 | S87° 45' 29.33"W |        |
| L796                        | 122.90 | N72° 38' 14.86"E |        |
| L797                        | 815.77 | N3° 00' 00.00"E  |        |
| L798                        | 153.21 | N88° 37' 01.68"W |        |
| L800                        | 179.57 | S82° 07' 18.56"W |        |
| L801                        | 3.33   | S88° 37' 01.68"E |        |
| L803                        | 129.97 | S74° 36' 42.18"E |        |
| L805                        | 71.47  | N86° 48' 49.94"E |        |
| L807                        | 49.80  | S0° 03' 37.40"W  |        |
| L808                        | 611.13 | S3° 00' 00.00"W  |        |
| L809                        | 14.83  | N81° 35' 41.75"W |        |
| L810                        | 304.21 | S86° 31' 39.47"W |        |
| L811                        | 42.78  | S73° 10' 23.74"W |        |
| L812                        | 52.85  | S72° 38' 14.86"W |        |
| L815                        | 150.07 | S81° 35' 41.75"E |        |
| L816                        | 186.45 | S73° 02' 30.47"E |        |
| L817                        | 92.30  | S82° 06' 48.39"E |        |
| L818                        | 492.49 | N3° 00' 00.00"E  |        |
| L820                        | 114.04 | N71° 54' 08.39"W |        |
| L822                        | 21.29  | N60° 43' 11.89"W |        |
| L824                        | 6.74   | N0° 03' 37.40"E  |        |
| L825                        | 379.75 | N58° 40' 55.70"E |        |
| L826                        | 0.24   | N72° 47' 32.69"E |        |
| L828                        | 109.69 | S70° 53' 31.35"W |        |
| L829                        | 249.79 | S73° 58' 42.28"W |        |
| L830                        | 62.45  | N82° 06' 48.39"W |        |
| L832                        | 626.87 | S11° 25' 58.40"E |        |
| L833                        | 70.22  | N74° 04' 22.35"E |        |
| L834                        | 273.12 | N11° 51' 50.98"W |        |

| PARCEL LINE AND CURVE TABLE |        |                  |        |
|-----------------------------|--------|------------------|--------|
| LINE#/CURVE#                | LENGTH | BEARING/DELTA    | RADIUS |
| L835                        | 349.93 | N73° 38' 12.07"E |        |
| L836                        | 130.25 | N1° 34' 04.19"W  |        |
| L837                        | 193.50 | N24° 56' 27.16"W |        |
| L839                        | 141.80 | N89° 49' 42.32"W |        |
| L841                        | 58.17  | S61° 36' 10.67"W |        |
| L842                        | 178.80 | N72° 47' 32.69"E |        |
| L844                        | 137.19 | N61° 36' 10.67"E |        |
| L846                        | 262.49 | S74° 04' 22.35"W |        |
| L847                        | 258.01 | S70° 52' 24.17"W |        |
| L848                        | 633.86 | N3° 00' 00.00"E  |        |
| L849                        | 4.64   | S72° 47' 32.69"W |        |
| L851                        | 379.75 | S58° 40' 55.70"W |        |
| L853                        | 114.04 | N71° 54' 08.39"W |        |
| L855                        | 403.88 | N19° 53' 48.14"E |        |
| L856                        | 602.32 | S69° 13' 15.02"E |        |
| L857                        | 21.29  | N60° 43' 11.89"W |        |
| L858                        | 56.54  | N0° 03' 37.40"E  |        |
| L859                        | 71.47  | S86° 48' 49.94"W |        |
| L860                        | 115.88 | N74° 36' 42.18"W |        |
| L861                        | 289.69 | N19° 57' 53.10"E |        |
| L862                        | 484.78 | S69° 15' 32.28"E |        |
| L866                        | 726.57 | N20° 48' 26.03"E |        |
| L867                        | 876.93 | N69° 37' 38.97"W |        |
| L868                        | 720.39 | S21° 26' 14.62"W |        |
| L869                        | 350.04 | S69° 15' 33.19"E |        |
| L872                        | 14.09  | S74° 36' 42.18"E |        |
| L873                        | 296.78 | N19° 57' 53.10"E |        |
| L875                        | 440.01 | S19° 53' 48.13"W |        |
| L876                        | 125.90 | N82° 07' 18.56"E |        |
| L878                        | 156.54 | S88° 37' 01.68"E |        |
| L880                        | 54.67  | S82° 07' 18.56"W |        |
| L882                        | 95.27  | N77° 17' 37.20"W |        |
| L884                        | 116.62 | S87° 45' 29.33"W |        |
| L885                        | 563.28 | N19° 53' 48.16"E |        |
| L886                        | 372.76 | S69° 13' 15.02"E |        |
| L887                        | 440.01 | S19° 53' 48.13"W |        |
| L888                        | 563.28 | N19° 53' 48.16"E |        |
| L889                        | 381.79 | N69° 13' 15.02"W |        |
| L890                        | 629.33 | S19° 53' 48.16"W |        |
| L891                        | 264.35 | S75° 09' 24.64"E |        |
| L893                        | 53.96  | N87° 45' 29.33"E |        |
| L894                        | 135.54 | N75° 09' 24.64"W |        |
| L896                        | 226.90 | N80° 46' 43.99"W |        |
| L898                        | 693.92 | N19° 53' 48.16"E |        |
| L899                        | 395.90 | S69° 13' 15.02"E |        |
| L900                        | 629.33 | S19° 53' 48.16"W |        |
| L901                        | 3.07   | N48° 20' 20.69"W |        |
| L902                        | 347.73 | N8° 38' 48.79"W  |        |
| L903                        | 214.46 | N13° 53' 44.71"W |        |
| L904                        | 140.58 | N19° 58' 54.84"E |        |
| L905                        | 369.13 | S69° 13' 15.02"E |        |

| PARCEL LINE AND CURVE TABLE |        |                  |        |
|-----------------------------|--------|------------------|--------|
| LINE#/CURVE#                | LENGTH | BEARING/DELTA    | RADIUS |
| C960                        | 295.39 | 64.35            | 263.00 |
| C1031                       | 129.21 | 28.15            | 263.00 |
| C1032                       | 85.85  | 21.11            | 233.00 |
| C1033                       | 59.06  | 14.52            | 233.00 |
| C1034                       | 178.38 | 37.85            | 270.00 |
| C1035                       | 157.09 | 33.33            | 270.00 |
| C1036                       | 20.79  | 5.03             | 237.00 |
| C1037                       | 63.05  | 13.73            | 263.00 |
| C1038                       | 97.88  | 23.66            | 237.00 |
| C1039                       | 152.44 | 33.21            | 263.00 |
| C1040                       | 180.20 | 48.47            | 213.00 |
| C1041                       | 50.78  | 13.66            | 213.00 |
| C1042                       | 54.98  | 90.00            | 35.00  |
| C1043                       | 23.11  | 21.01            | 63.00  |
| C1044                       | 24.72  | 8.69             | 163.00 |
| C1045                       | 47.40  | 11.13            | 244.00 |
| C1046                       | 47.68  | 11.20            | 244.00 |
| C1047                       | 14.92  | 3.92             | 218.00 |
| C1048                       | 96.95  | 25.48            | 218.00 |
| L738                        | 14.06  | S51° 17' 24.19"W |        |
| L907                        | 26.07  | S23° 08' 32.67"W |        |
| L909                        | 23.81  | S51° 17' 24.19"W |        |
| L910                        | 829.16 | S62° 44' 46.78"E |        |
| L911                        | 266.66 | N19° 12' 04.30"E |        |
| L912                        | 581.48 | N59° 10' 02.02"W |        |
| L913                        | 63.37  | N14° 51' 33.10"E |        |
| L915                        | 172.61 | N23° 08' 30.45"E |        |
| L917                        | 105.24 | N44° 15' 10.44"E |        |
| L918                        | 533.56 | S62° 50' 48.14"E |        |
| L919                        | 113.85 | S54° 33' 53.98"W |        |
| L920                        | 155.42 | S73° 10' 06.05"W |        |
| L921                        | 260.12 | N74° 23' 14.56"W |        |
| L922                        | 120.93 | S58° 10' 58.05"W |        |
| L923                        | 81.03  | N57° 49' 36.00"W |        |
| L924                        | 0.00   | N57° 49' 36.17"W |        |
| L925                        | 167.92 | N44° 15' 10.44"E |        |
| L928                        | 538.16 | S66° 44' 43.75"E |        |
| L929                        | 137.41 | S29° 47' 00.22"W |        |
| L930                        | 157.45 | S59° 02' 10.48"W |        |
| L933                        | 176.84 | N32° 52' 52.91"E |        |
| L934                        | 121.47 | N22° 45' 53.88"E |        |



P:\2024\24-193\_MAHA\_PH1A\03\_DESIGN\01\_CAD\01\_TENT MAP\PKG1 - AF\PKG1-AF1.20-AVG SLOPES.DWG Ellen Oberstain 5/4/2026 11:37 AM\ANSI\_full\_bleed\_D\_(22.00\_x\_34.00\_inches)

| AVERAGE CROSS SLOPE TABLE |               |            |                |
|---------------------------|---------------|------------|----------------|
| PARCEL NAME               | AREA (SQ.FT.) | AREA (AC.) | MEAN SLOPE (%) |
| AF-1                      | 99,704        | 2.29       | 10.0%          |
| AF-2                      | 122,802       | 2.82       | 16.8%          |
| AF-3                      | 161,482       | 3.71       | 8.9%           |
| AF-4                      | 105,291       | 2.42       | 8.6%           |
| AF-5                      | 131,518       | 3.02       | 11.4%          |
| AF-6                      | 140,176       | 3.22       | 9.6%           |
| AF-7                      | 129,032       | 2.96       | 7.5%           |
| AF-8                      | 218,176       | 5.01       | 12.8%          |
| AF-9                      | 292,874       | 6.72       | 18.4%          |
| AF-10                     | 208,841       | 4.79       | 14.3%          |
| AF-11                     | 143,630       | 3.30       | 12.4%          |
| AF-12                     | 171,830       | 3.94       | 14.8%          |
| AF-13                     | 260,425       | 5.98       | 21.7%          |
| AF-14                     | 231,455       | 5.31       | 9.1%           |
| AF-15                     | 187,423       | 4.30       | 11.7%          |
| AF-16                     | 125,637       | 2.88       | 14.6%          |
| AF-17                     | 622,820       | 14.30      | 7.2%           |
| AF-18                     | 143,146       | 3.29       | 21.2%          |
| AF-19                     | 173,378       | 3.98       | 6.7%           |
| AF-20                     | 164,049       | 3.77       | 38.1%          |
| AF-21                     | 261,983       | 6.01       | 34.2%          |
| AF-22                     | 231,236       | 5.31       | 15.9%          |
| AF-23                     | 208,883       | 4.80       | 20.8%          |
| AF-24                     | 303,943       | 6.98       | 16.7%          |
| AF-25                     | 316,537       | 7.27       | 15.3%          |
| AF-26                     | 369,101       | 8.47       | 17.5%          |
| AF-27                     | 346,669       | 7.96       | 15.2%          |
| AF-28                     | 248,803       | 5.71       | 11.7%          |
| AF-29                     | 288,137       | 6.61       | 21.7%          |
| AF-30                     | 971,707       | 22.31      | 13.5%          |
| AF-31                     | 773,536       | 17.76      | 9.4%           |
| AF-32                     | 2,428,964     | 55.76      | 15.9%          |
| AF-33                     | 6,044,076     | 138.75     | 11.5%          |



SCALE: 0 1"

Note: If the graphic scale does not equal 1" this sheet has been modified from its original size.

| NO | DATE | ISSUANCE |
|----|------|----------|
|    |      |          |

©2025 Sherwood Design Engineers  
The designs and concepts shown are the sole property of Sherwood Design Engineers and may not be used without the prior written consent of Sherwood Design Engineers.


PROJECT NO. 24-193

DATE MAY 4, 2026

DRAWN TB.EO.SS

CHECKED CA.SG

ANASU FARMS  
SUBDIVISION  
GUENOC VALLEY  
LAKE COUNTY  
CALIFORNIA

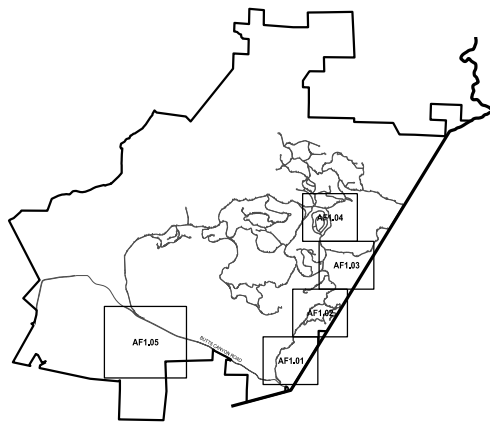


PHASED VESTING  
TENTATIVE MAP  
SUBDIVISION AF

PARCEL  
AVERAGE  
SLOPES

AF1.20



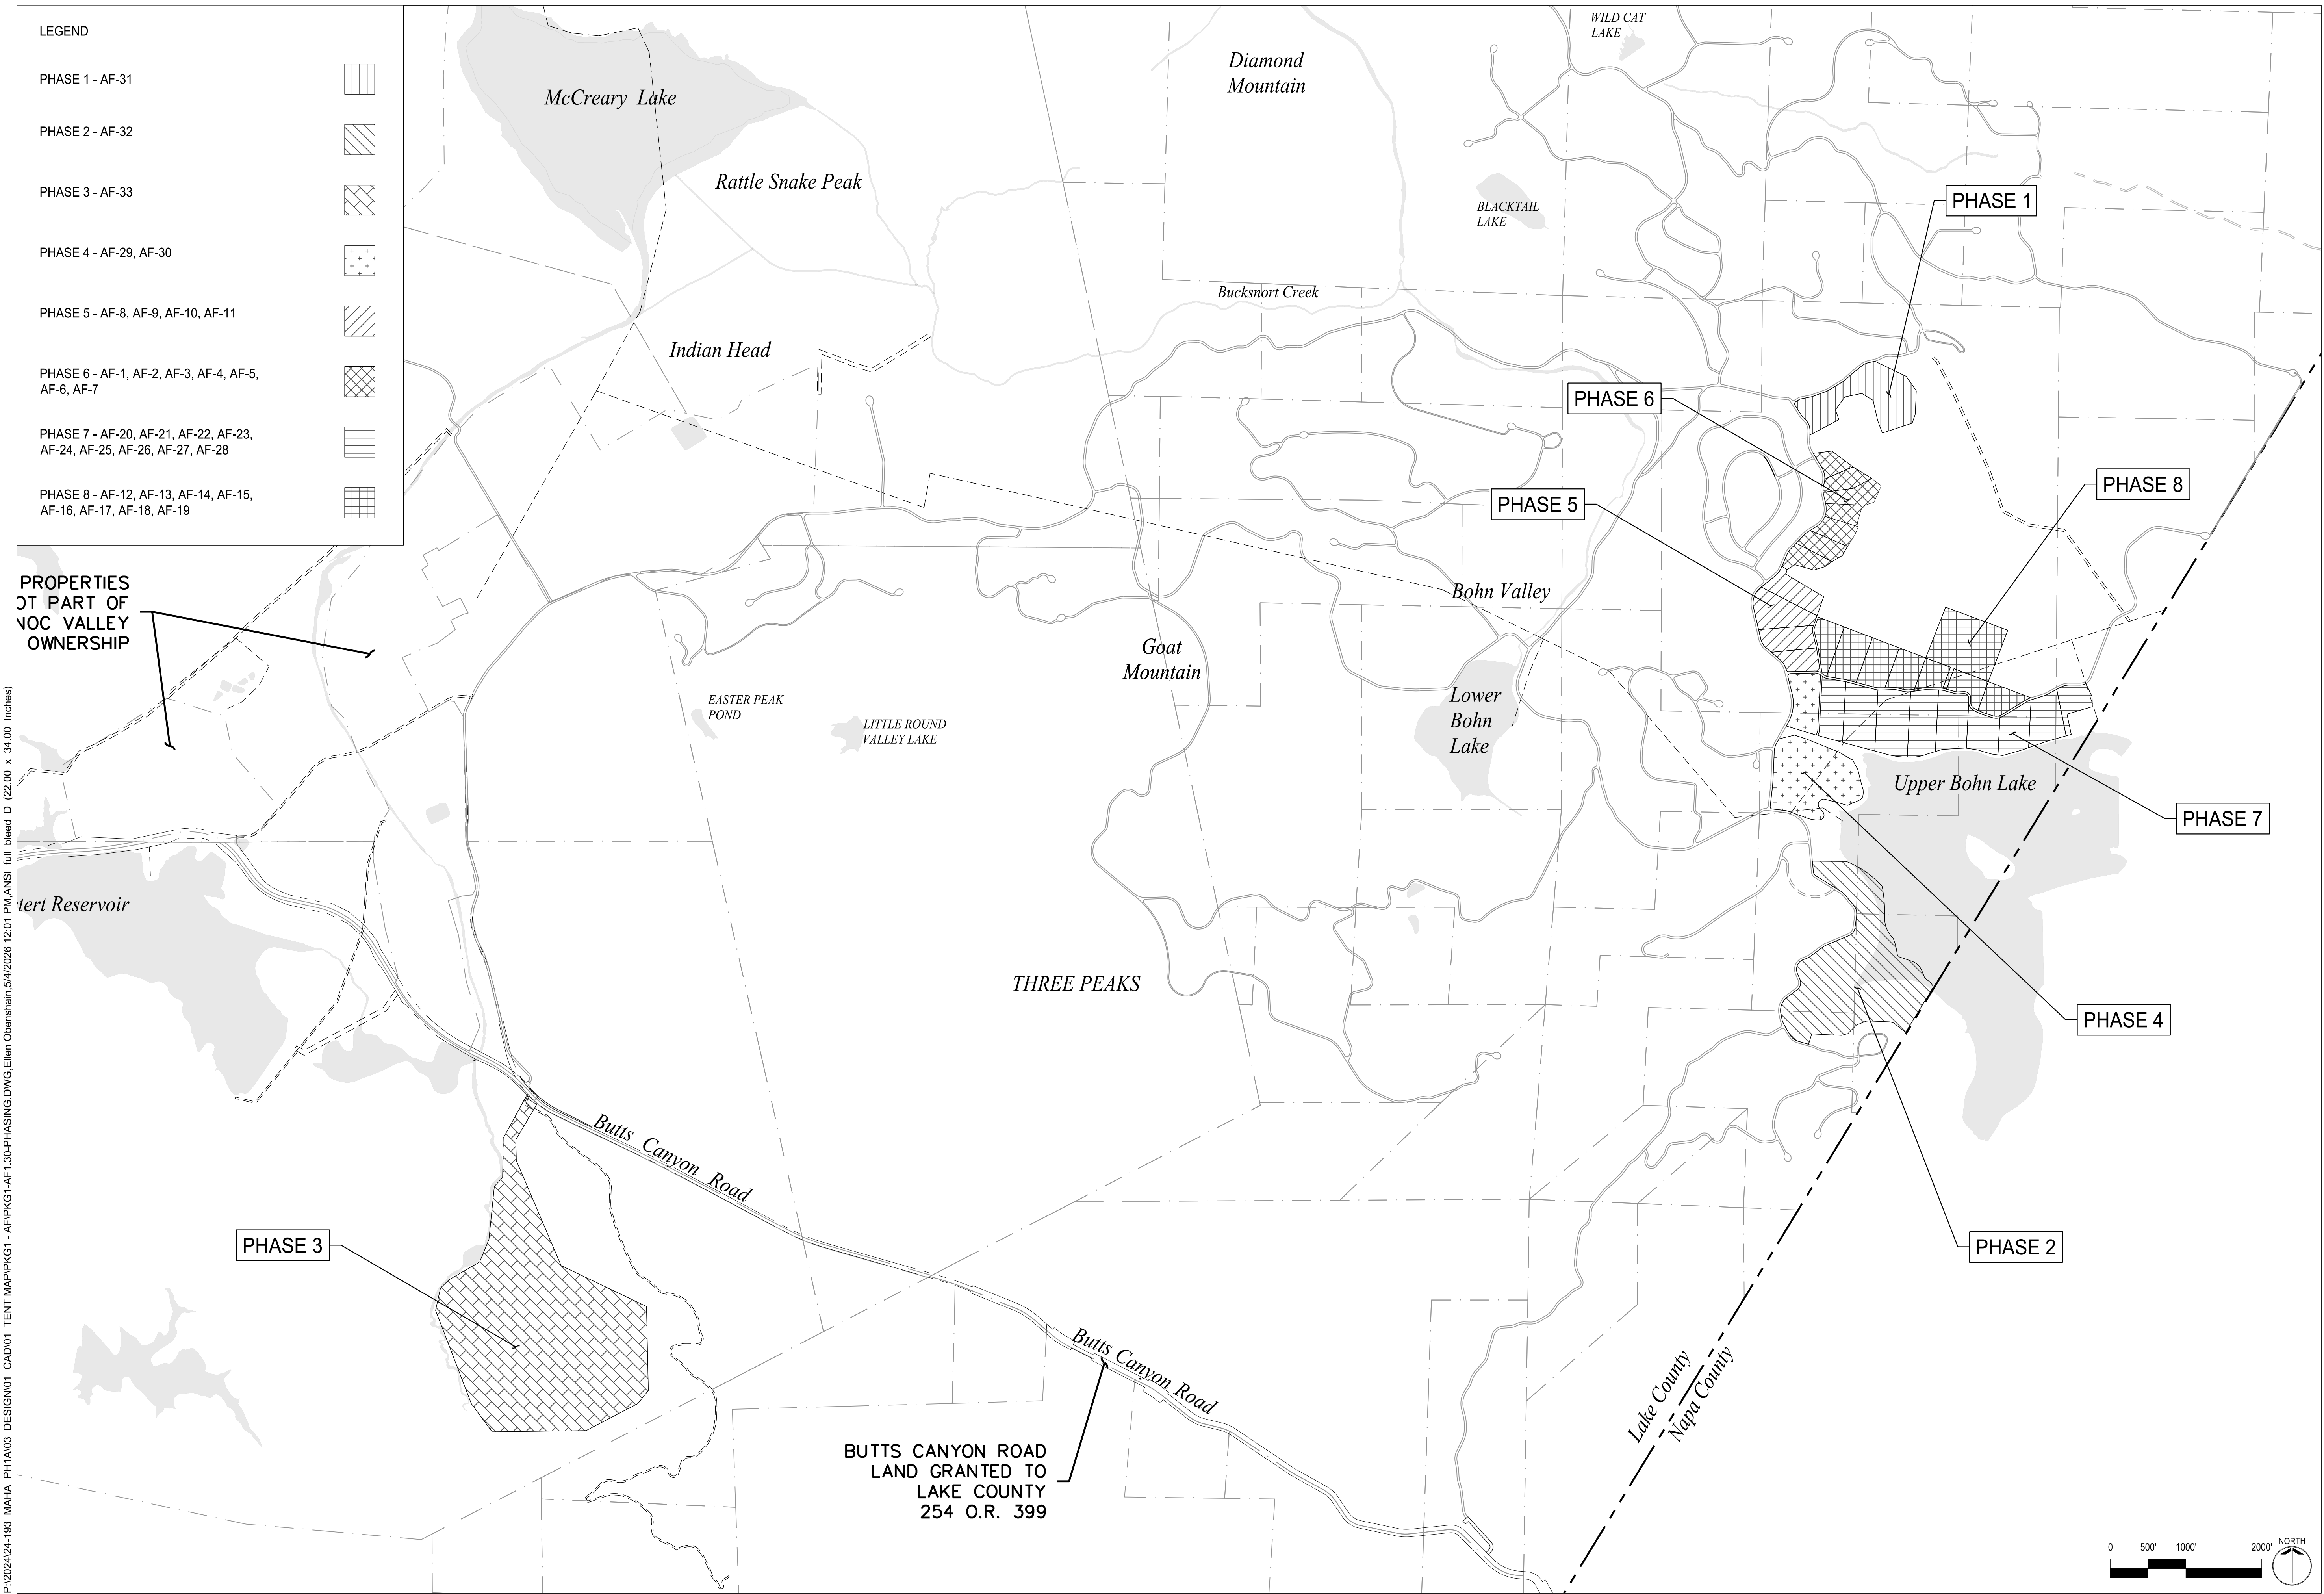

LEGEND

PHASE 1 - AF-31

PHASE 2 - AF-32

PHASE 3 - AF-33

PHASE 4 - AF-29, AF-30

PHASE 5 - AF-8, AF-9, AF-10, AF-11

PHASE 6 - AF-1, AF-2, AF-3, AF-4, AF-5, AF-6, AF-7

PHASE 7 - AF-20, AF-21, AF-22, AF-23, AF-24, AF-25, AF-26, AF-27, AF-28

PHASE 8 - AF-12, AF-13, AF-14, AF-15, AF-16, AF-17, AF-18, AF-19



SCALE: 1"=2000'  
0  
Note: If the graphic scale does not equal 1" this sheet has been modified from its original size.

| NO | DATE | ISSUANCE |
|----|------|----------|
|    |      |          |

©2025 Sherwood Design Engineers  
The designs and concepts shown are the sole property of Sherwood Design Engineers and may not be used without the prior written consent of Sherwood Design Engineers.


PROJECT NO. 24-193

DATE MAY 4, 2026

DRAWN TB.EO.SS

CHECKED CA.GS


ANASU FARMS  
SUBDIVISION  
GUENOC VALLEY  
LAKE COUNTY  
CALIFORNIA

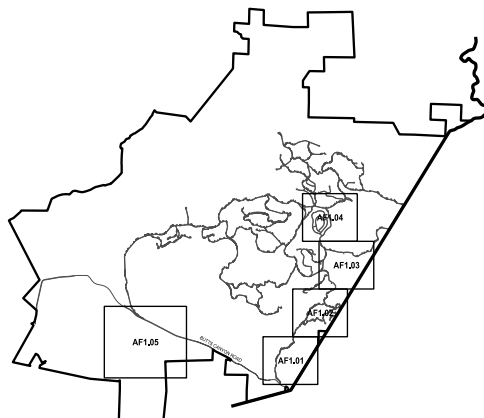

PHASED VESTING  
TENTATIVE MAP  
SUBDIVISION AF

AF PHASING  
PLAN


AF1.30



P:\2024\24-193\_MAHA\_PH1A\03\_DESIGN\01\_CAD\01\_TENT MAP\PKG1 - AF1PKG1-AF1.30-PHASING.DWG Ellen Obenshain:5/4/2026 12:01 PM\ANSI Full Bleed\_D (22.00\_x\_34.00\_inches)



P:\2024\104-193\_MAHA\_PH1A\03\_DESIGN\01\_CAD\01\_TENT MAP\PKG1 - AF2\00-PERIPHERAL PARCELS.DWG:Ellen Obenshain 5/4/2026 11:39 AM ANSI\_full\_bleed\_D (22.00 x 34.00 inches)

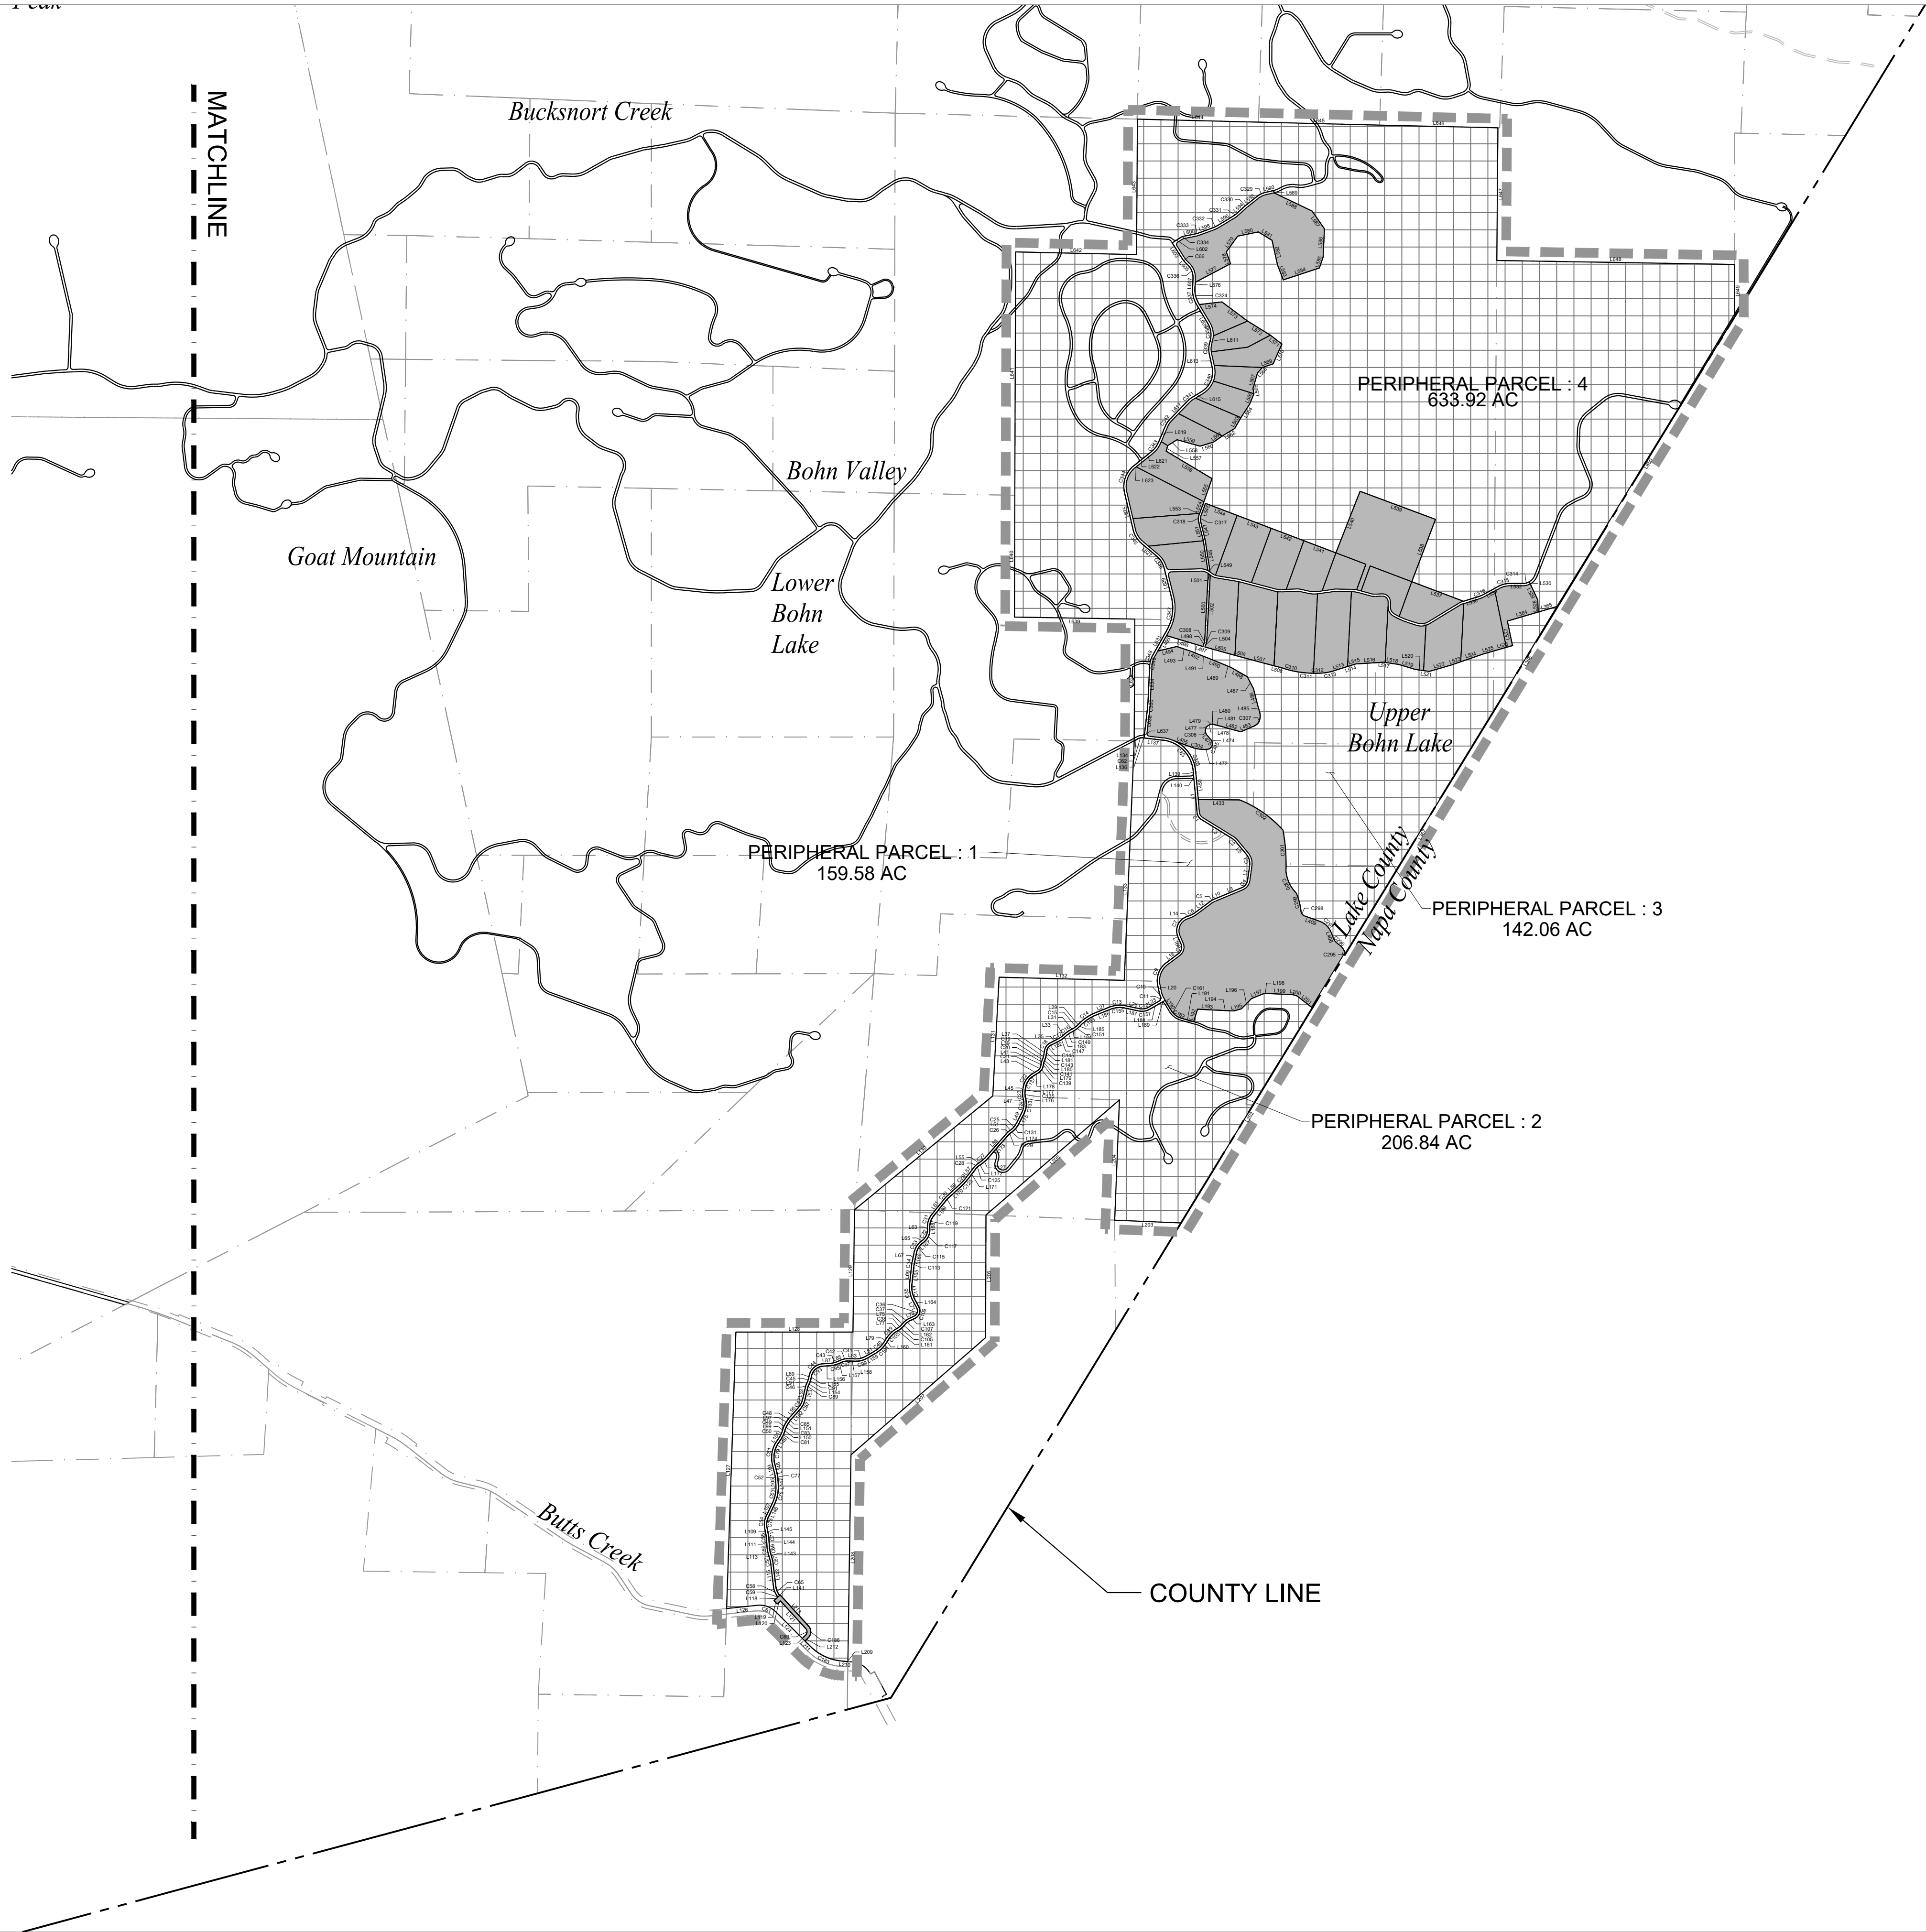

LEGEND

PARCEL BOUNDARY

ROADWAY

CUL-DE-SAC

COUNTY LINE

PERIPHERAL PARCELS

DEVELOPMENT PARCELS

IMPACTED PARCELS



SCALE: 1"=1000'

Note: If the graphic scale does not equal 1", this sheet has been modified from its original size.

| NO | DATE | ISSUANCE |
|----|------|----------|
|    |      |          |
|    |      |          |

©2025 Sherwood Design Engineers  
The designs and concepts shown are the sole property of Sherwood Design Engineers and may not be used without the prior written consent of Sherwood Design Engineers.


PROJECT NO. 24-193

DATE MAY 4, 2026

DRAWN TB.EO.SS

CHECKED CA.SG

ANASU FARMS  
SUBDIVISION  
GUENOC VALLEY  
LAKE COUNTY  
CALIFORNIA

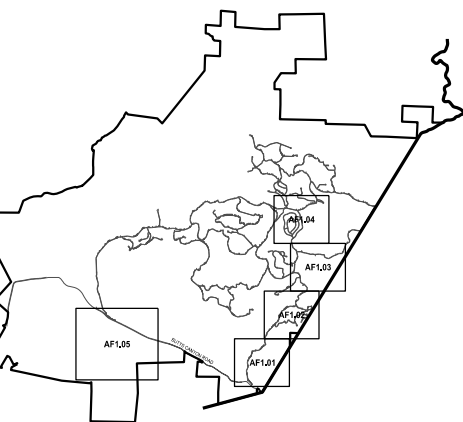

PHASED VESTING  
TENTATIVE MAP  
SUBDIVISION AF


PERIPHERAL  
PARCEL PLAN

AF2.00

0 500' 1000' 2000' NORTH



P:\2024\124-193\_MAHA\_PH1A\03\_DESIGN\01\_CAD\01\_TENT MAP\PKG1 - AF2\00-PERIPHERAL PARCELS.DWG:Ellen Orenshain 5/4/2026 11:35 AM ANSI\_full\_bleed\_D (22.00 x 34.00 inches)

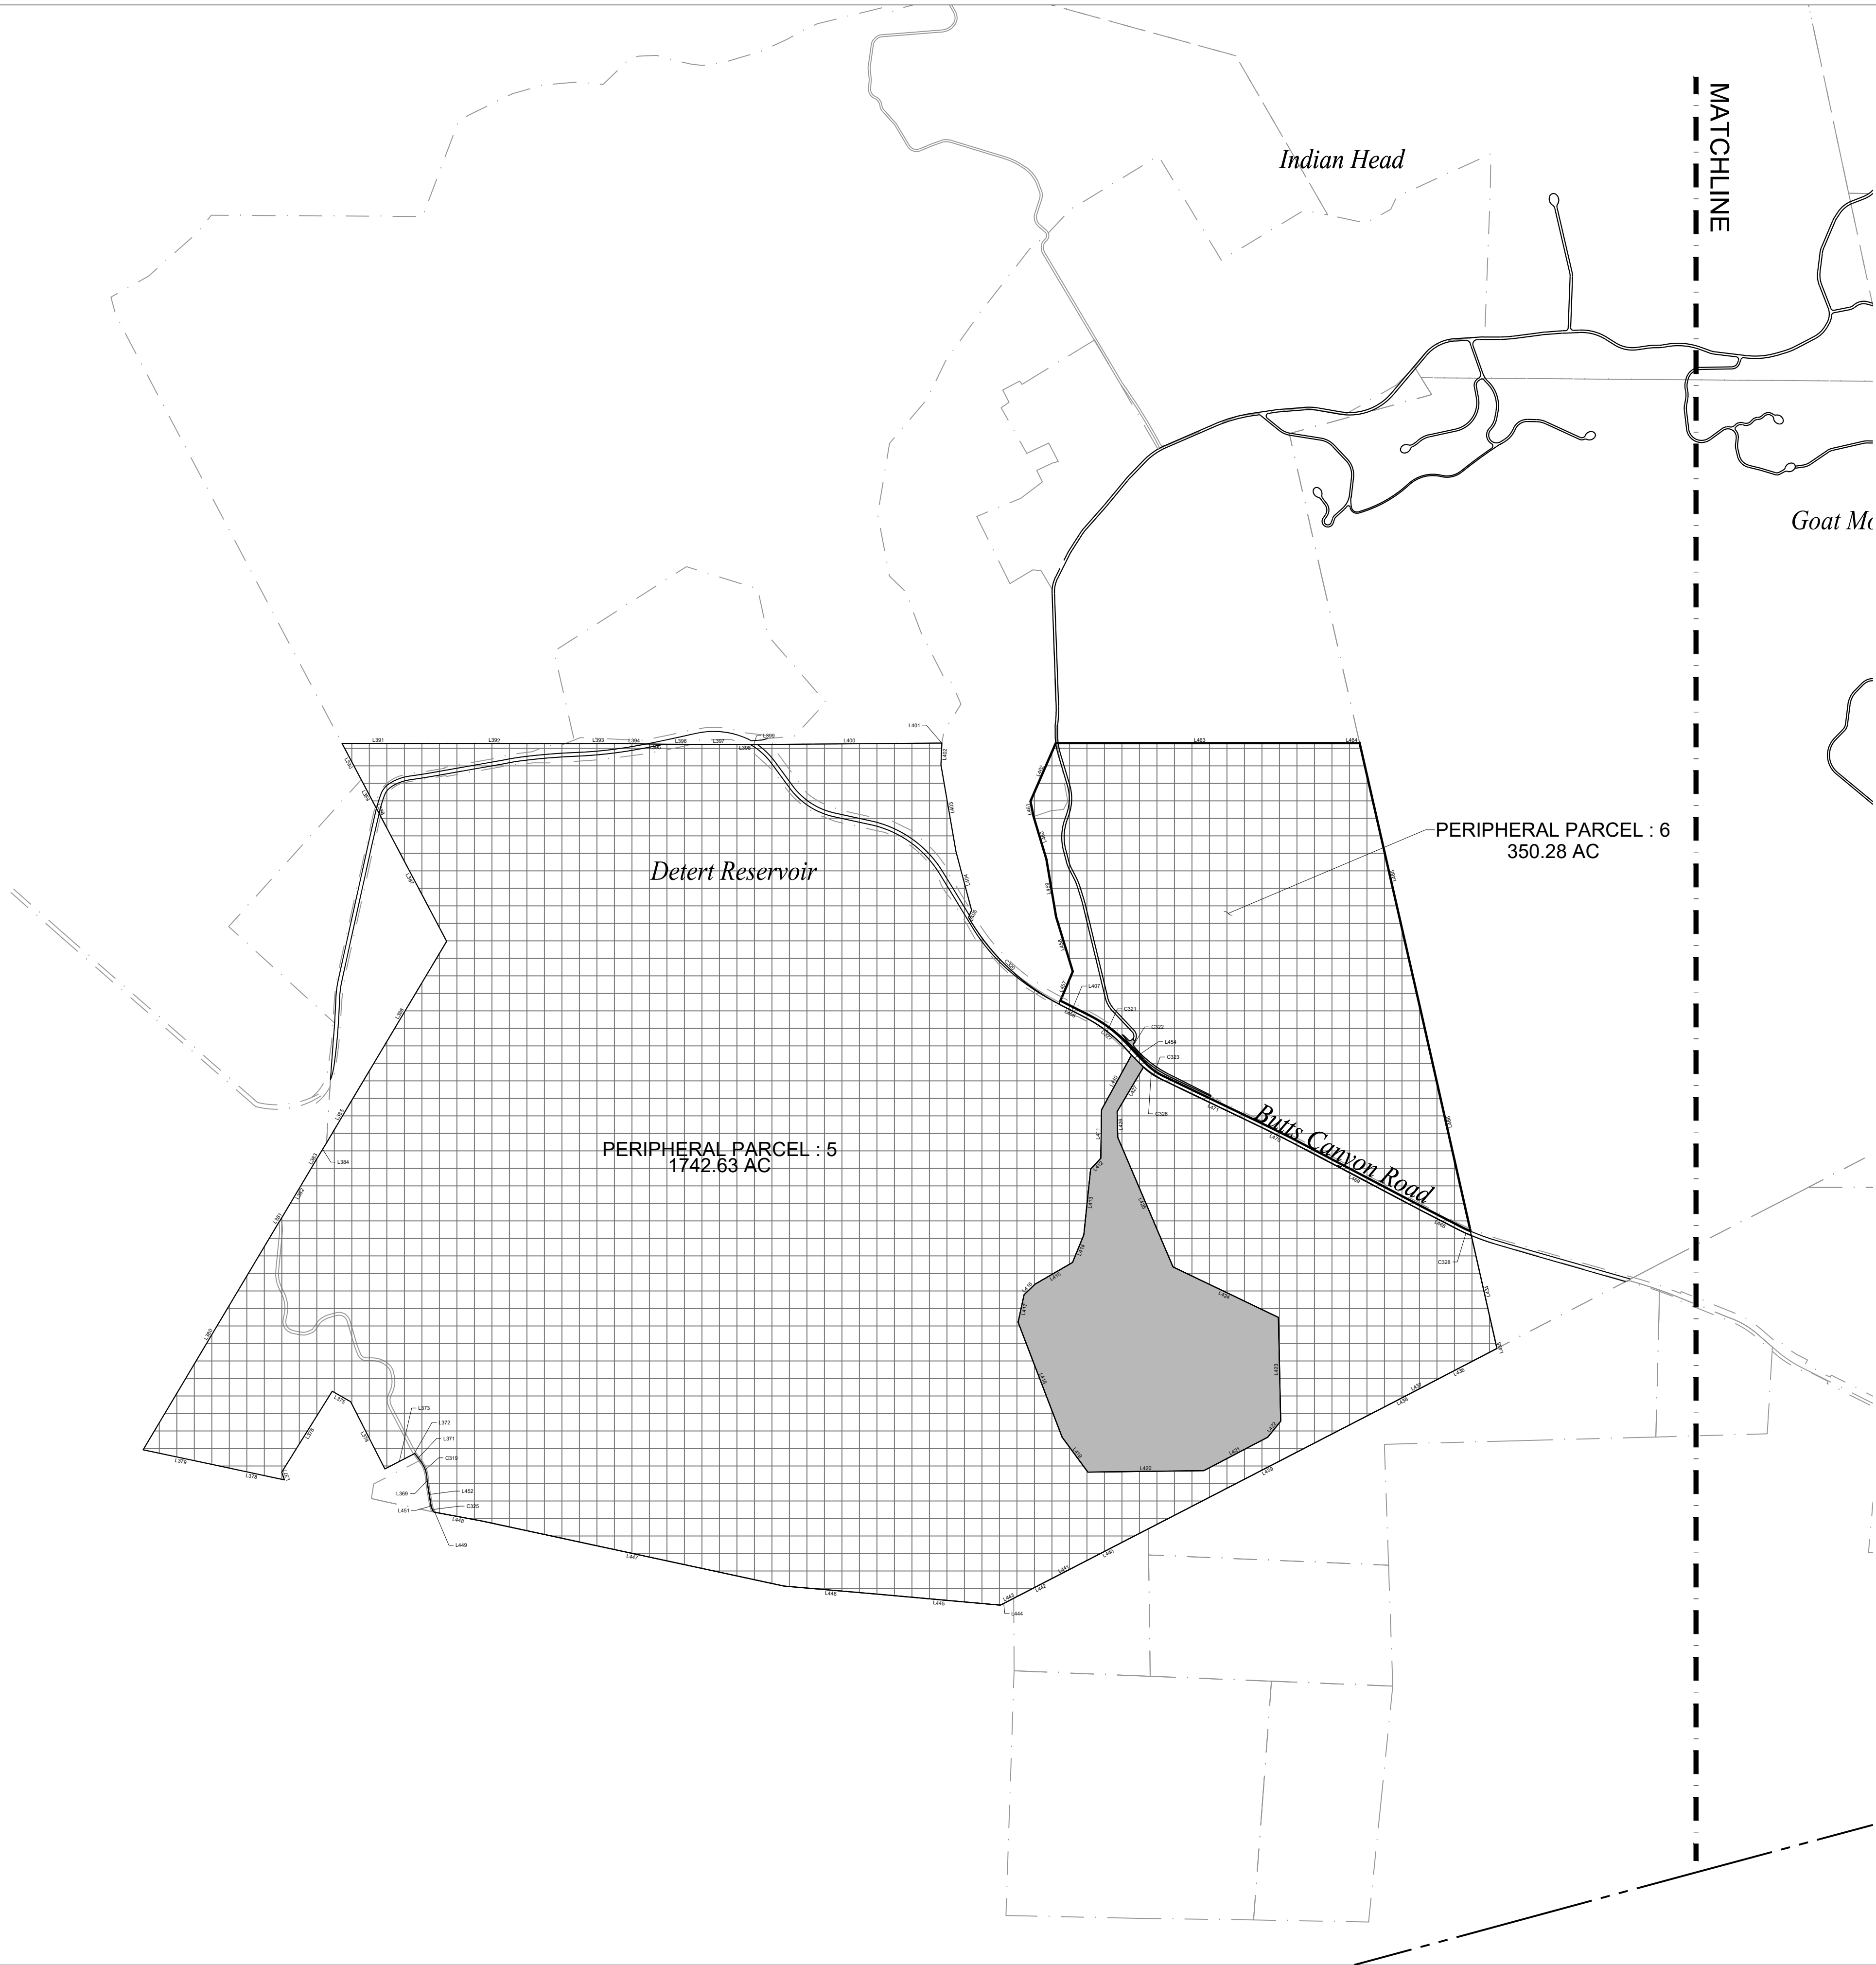

**LEGEND**

PARCEL BOUNDARY

ROADWAY

CUL-DE-SAC

COUNTY LINE

PERIPHERAL PARCELS

DEVELOPMENT PARCELS

IMPACTED PARCELS



SCALE: 1"=1000'

Note: If the graphic scale does not equal 1", this sheet has been modified from its original size.

| NO | DATE | ISSUANCE |
|----|------|----------|
|    |      |          |
|    |      |          |

©2025 Sherwood Design Engineers  
The designs and concepts shown are the sole property of Sherwood Design Engineers and may not be used without the prior written consent of Sherwood Design Engineers.


PROJECT NO. 24-193

DATE MAY 4, 2026

DRAWN TB.EO.SS

CHECKED CA.SG


**ANASU FARMS  
SUBDIVISION**  
GUENOC VALLEY  
LAKE COUNTY  
CALIFORNIA



**PHASED VESTING  
TENTATIVE MAP  
SUBDIVISION AF**

**PERIPHERAL  
PARCEL PLAN**

**AF2.01**





| Parcel Line and Curve Table |        |               |        |
|-----------------------------|--------|---------------|--------|
| Line #/Curve #              | Length | Bearing/Delta | Radius |
| C1                          | 92.56  | 53.03         | 100.00 |
| C2                          | 74.90  | 18.74         | 229.00 |
| C3                          | 124.81 | 47.67         | 150.00 |
| C4                          | 103.41 | 59.25         | 100.00 |
| C5                          | 64.35  | 14.02         | 263.00 |
| C6                          | 71.26  | 17.23         | 237.00 |
| C7                          | 267.43 | 94.00         | 163.00 |
| C8                          | 116.38 | 76.64         | 87.00  |
| C9                          | 275.28 | 64.91         | 243.00 |
| C10                         | 54.83  | 11.94         | 263.00 |
| C11                         | 51.14  | 83.71         | 35.00  |
| C12                         | 92.95  | 41.93         | 127.00 |
| C13                         | 184.03 | 33.69         | 313.00 |
| C14                         | 225.24 | 25.16         | 513.00 |
| C15                         | 57.44  | 17.60         | 187.00 |
| C16                         | 80.92  | 11.23         | 413.00 |
| C17                         | 44.38  | 13.60         | 187.00 |
| C18                         | 106.21 | 53.85         | 113.00 |
| C19                         | 49.81  | 12.04         | 237.00 |
| C20                         | 31.13  | 10.94         | 163.00 |
| C21                         | 59.80  | 47.58         | 72.00  |
| C22                         | 188.62 | 50.74         | 213.00 |
| C23                         | 80.65  | 21.69         | 213.00 |
| C24                         | 134.83 | 41.31         | 187.00 |
| C25                         | 91.89  | 28.16         | 187.00 |
| C26                         | 50.75  | 13.65         | 213.00 |
| C27                         | 103.29 | 15.29         | 387.00 |
| C28                         | 71.48  | 19.23         | 213.00 |
| C29                         | 85.34  | 10.04         | 487.00 |
| C30                         | 75.91  | 8.48          | 513.00 |
| C31                         | 151.07 | 40.64         | 213.00 |
| C32                         | 126.85 | 53.05         | 137.00 |
| C33                         | 147.78 | 39.75         | 213.00 |
| C34                         | 28.96  | 5.30          | 313.00 |
| C35                         | 190.11 | 34.80         | 313.00 |
| C36                         | 100.55 | 92.92         | 62.00  |
| C37                         | 80.90  | 21.76         | 213.00 |
| C38                         | 54.29  | 16.63         | 187.00 |
| C39                         | 147.49 | 27.00         | 313.00 |
| C40                         | 139.02 | 27.75         | 287.00 |
| C41                         | 103.98 | 31.86         | 187.00 |
| C42                         | 93.35  | 25.11         | 213.00 |
| C43                         | 63.66  | 19.50         | 187.00 |
| C44                         | 212.84 | 74.82         | 163.00 |
| C45                         | 51.86  | 12.54         | 237.00 |
| C46                         | 40.67  | 10.94         | 213.00 |
| C47                         | 93.65  | 28.69         | 187.00 |
| C48                         | 49.94  | 9.14          | 313.00 |
| C49                         | 79.10  | 17.23         | 263.00 |
| C50                         | 72.95  | 17.64         | 237.00 |
| C51                         | 256.08 | 46.88         | 313.00 |
| C52                         | 79.88  | 11.83         | 387.00 |
| C53                         | 186.00 | 27.54         | 387.00 |
| C54                         | 135.89 | 36.55         | 213.00 |
| C55                         | 26.28  | 8.05          | 187.00 |
| C56                         | 92.92  | 12.89         | 413.00 |
| C57                         | 45.23  | 9.03          | 287.00 |
| C58                         | 121.79 | 32.76         | 213.00 |
| C59                         | 1.21   | 0.33          | 213.00 |
| C60                         | 76.11  | 87.21         | 50.00  |
| C61                         | 221.85 | 50.85         | 249.97 |
| C62                         | 59.67  | 34.19         | 100.00 |
| C63                         | 507.23 | 78.12         | 372.00 |
| C65                         | 106.93 | 32.76         | 187.00 |
| C66                         | 56.97  | 13.66         | 239.00 |
| C67                         | 49.33  | 9.03          | 313.00 |
| C69                         | 87.07  | 12.89         | 387.00 |
| C73                         | 119.30 | 36.55         | 187.00 |
| C75                         | 198.50 | 27.54         | 413.00 |

| Parcel Line and Curve Table |        |               |         |
|-----------------------------|--------|---------------|---------|
| Line #/Curve #              | Length | Bearing/Delta | Radius  |
| C77                         | 85.25  | 11.83         | 413.00  |
| C79                         | 234.81 | 46.88         | 287.00  |
| C81                         | 80.95  | 17.64         | 263.00  |
| C83                         | 71.28  | 17.23         | 237.00  |
| C85                         | 45.79  | 9.14          | 287.00  |
| C87                         | 106.67 | 28.69         | 213.00  |
| C89                         | 35.70  | 10.94         | 187.00  |
| C91                         | 57.55  | 12.54         | 263.00  |
| C93                         | 178.89 | 74.82         | 137.00  |
| C95                         | 72.51  | 19.50         | 213.00  |
| C97                         | 81.96  | 25.11         | 187.00  |
| C99                         | 118.43 | 31.86         | 213.00  |
| C101                        | 151.62 | 27.75         | 313.00  |
| C103                        | 135.24 | 27.00         | 287.00  |
| C105                        | 61.84  | 16.63         | 213.00  |
| C107                        | 71.02  | 21.76         | 187.00  |
| C109                        | 142.72 | 92.92         | 88.00   |
| C111                        | 174.31 | 34.80         | 287.00  |
| C113                        | 26.55  | 5.30          | 287.00  |
| C115                        | 129.74 | 39.75         | 187.00  |
| C117                        | 150.93 | 53.05         | 163.00  |
| C119                        | 132.63 | 40.64         | 187.00  |
| C121                        | 72.06  | 8.48          | 487.00  |
| C123                        | 89.90  | 10.04         | 513.00  |
| C125                        | 62.75  | 19.23         | 187.00  |
| C127                        | 110.22 | 15.29         | 413.00  |
| C129                        | 44.55  | 13.65         | 187.00  |
| C131                        | 104.67 | 28.16         | 213.00  |
| C133                        | 153.58 | 41.31         | 213.00  |
| C135                        | 70.80  | 21.69         | 187.00  |
| C137                        | 165.59 | 50.74         | 187.00  |
| C139                        | 81.39  | 47.58         | 98.00   |
| C141                        | 26.16  | 10.94         | 137.00  |
| C143                        | 55.28  | 12.04         | 263.00  |
| C145                        | 81.77  | 53.85         | 87.00   |
| C147                        | 50.55  | 13.60         | 213.00  |
| C149                        | 75.82  | 11.23         | 387.00  |
| C151                        | 65.43  | 17.60         | 213.00  |
| C153                        | 213.82 | 25.16         | 487.00  |
| C155                        | 168.75 | 33.69         | 287.00  |
| C157                        | 111.98 | 41.93         | 153.00  |
| C161                        | 57.98  | 17.72         | 187.46  |
| C162                        | 82.28  | 24.94         | 189.00  |
| C183                        | 386.81 | 40.30         | 549.94  |
| C186                        | 136.99 | 87.21         | 90.00   |
| C295                        | 103.92 | 26.84         | 221.87  |
| C296                        | 91.15  | 19.93         | 262.12  |
| C297                        | 179.50 | 48.50         | 212.05  |
| C298                        | 74.33  | 68.58         | 62.10   |
| C299                        | 199.18 | 15.83         | 721.12  |
| C300                        | 274.08 | 41.12         | 381.93  |
| C301                        | 443.95 | 12.70         | 2003.46 |
| C302                        | 582.68 | 26.54         | 1258.09 |
| C303                        | 426.05 | 61.33         | 398.00  |
| C304                        | 165.23 | 22.92         | 413.08  |
| C305                        | 111.53 | 103.12        | 61.97   |
| C306                        | 113.50 | 84.63         | 76.84   |
| C307                        | 190.59 | 90.91         | 120.13  |
| C308                        | 2.45   | 17.51         | 8.00    |
| C309                        | 9.17   | 17.51         | 30.00   |
| C310                        | 189.93 | 9.55          | 1139.74 |
| C311                        | 160.03 | 7.81          | 1174.19 |
| C312                        | 92.83  | 4.53          | 1174.19 |
| C313                        | 166.38 | 17.85         | 533.92  |
| C314                        | 70.04  | 29.29         | 137.00  |
| C315                        | 127.57 | 27.79         | 263.02  |
| C316                        | 44.96  | 10.87         | 237.00  |
| C317                        | 63.73  | 33.22         | 109.91  |
| C318                        | 76.80  | 33.35         | 131.93  |
| C319                        | 174.50 | 30.98         | 322.73  |

| Parcel Line and Curve Table |         |                  |         |
|-----------------------------|---------|------------------|---------|
| Line #/Curve #              | Length  | Bearing/Delta    | Radius  |
| C320                        | 1357.85 | 32.07            | 2425.64 |
| C321                        | 571.77  | 21.33            | 1535.52 |
| C322                        | 78.04   | 1.25             | 3564.80 |
| C323                        | 275.83  | 16.95            | 932.37  |
| C324                        | 213.64  | 41.86            | 292.38  |
| C325                        | 59.68   | 13.58            | 251.81  |
| C326                        | 333.72  | 27.09            | 705.80  |
| C327                        | 616.63  | 23.30            | 1516.62 |
| C328                        | 125.45  | 2.31             | 3105.14 |
| C329                        | 108.52  | 25.48            | 244.00  |
| C330                        | 16.70   | 3.92             | 244.00  |
| C331                        | 42.60   | 11.20            | 218.00  |
| C332                        | 42.35   | 11.13            | 218.00  |
| C333                        | 20.78   | 8.69             | 137.00  |
| C334                        | 32.64   | 21.01            | 89.00   |
| C336                        | 158.20  | 48.47            | 187.00  |
| C337                        | 173.20  | 33.19            | 299.00  |
| C338                        | 194.18  | 46.94            | 237.00  |
| C339                        | 131.69  | 28.69            | 263.00  |
| C340                        | 303.16  | 71.19            | 244.00  |
| C341                        | 65.65   | 14.52            | 259.00  |
| C342                        | 95.43   | 21.11            | 259.00  |
| C343                        | 116.43  | 28.15            | 237.00  |
| C344                        | 324.59  | 64.35            | 289.00  |
| C345                        | 169.02  | 38.82            | 263.00  |
| C346                        | 148.74  | 35.96            | 237.00  |
| C347                        | 367.56  | 43.24            | 487.00  |
| C348                        | 54.92   | 11.96            | 263.07  |
| C349                        | 67.49   | 14.69            | 263.24  |
| C350                        | 66.14   | 3.89             | 974.00  |
| L1                          | 350.36  | S5° 20' 02.06"E  |         |
| L3                          | 381.73  | S58° 22' 01.52"E |         |
| L5                          | 174.53  | S39° 37' 35.03"E |         |
| L7                          | 164.56  | S8° 02' 47.51"W  |         |
| L9                          | 253.59  | S67° 17' 44.98"W |         |
| L10                         | 71.58   | S67° 17' 44.98"W |         |
| L12                         | 194.19  | S53° 16' 36.95"W |         |
| L14                         | 31.30   | S70° 30' 14.79"W |         |
| L16                         | 86.16   | S23° 29' 56.16"E |         |
| L18                         | 168.19  | S53° 08' 44.48"W |         |
| L20                         | 76.68   | S11° 45' 36.34"E |         |
| L23                         | 141.00  | S60° 00' 29.78"W |         |
| L25                         | 156.48  | N78° 03' 30.66"W |         |
| L27                         | 163.42  | S68° 15' 12.62"W |         |
| L29                         | 9.90    | S43° 05' 50.94"W |         |
| L31                         | 39.60   | S60° 41' 51.71"W |         |
| L33                         | 36.58   | S49° 28' 18.39"W |         |
| L35                         | 102.16  | S63° 04' 05.75"W |         |
| L37                         | 42.69   | S9° 12' 50.08"W  |         |
| L39                         | 19.43   | S21° 15' 23.15"W |         |
| L41                         | 31.12   | S10° 18' 50.59"W |         |
| L43                         | 73.47   | S57° 53' 54.95"W |         |
| L45                         | 32.62   | S7° 09' 40.57"W  |         |
| L47                         | 14.63   | S14° 31' 58.60"E |         |
| L49                         | 144.26  | S26° 46' 41.95"W |         |
| L51                         | 10.57   | S54° 56' 02.51"W |         |
| L53                         | 333.13  | S41° 16' 58.36"W |         |
| L55                         | 10.54   | S56° 34' 28.07"W |         |
| L57                         | 136.05  | S37° 20' 51.57"W |         |
| L59                         | 190.37  | S47° 23' 17.72"W |         |
| L61                         | 198.81  | S38° 54' 35.74"W |         |
| L63                         | 26.35   | S1° 43' 39.15"E  |         |
| L65                         | 24.30   | S51° 19' 26.46"W |         |
| L67                         | 110.42  | S11° 34' 16.71"W |         |
| L69                         | 204.55  | S6° 16' 13.11"W  |         |
| L71                         | 90.95   | S28° 31' 45.05"E |         |
| L73                         | 60.83   | S64° 23' 28.92"W |         |
| L75                         | 33.73   | S42° 37' 50.58"W |         |
| L77                         | 18.59   | S59° 15' 55.52"W |         |
| L79                         | 49.10   | S32° 15' 58.96"W |         |

| Parcel Line and Curve Table |         |                  |        |
|-----------------------------|---------|------------------|--------|
| Line #/Curve #              | Length  | Bearing/Delta    | Radius |
| L81                         | 121.67  | S60° 01' 12.66"W |        |
| L83                         | 77.67   | N88° 07' 19.63"W |        |
| L85                         | 46.50   | S66° 45' 58.57"W |        |
| L87                         | 88.44   | S86° 16' 13.52"W |        |
| L89                         | 21.27   | S11° 27' 18.51"W |        |
| L91                         | 22.88   | S23° 59' 30.29"W |        |
| L93                         | 137.07  | S13° 03' 10.23"W |        |
| L95                         | 141.20  | S41° 44' 48.60"W |        |
| L97                         | 30.19   | S32° 36' 19.03"W |        |
| L99                         | 9.86    | S15° 22' 24.48"W |        |
| L101                        | 69.64   | S33° 00' 31.57"W |        |
| L103                        | 103.50  | S13° 52' 06.46"E |        |
| L105                        | 58.41   | S2° 02' 31.97"E  |        |
| L107                        | 158.77  | S25° 29' 42.88"W |        |
| L109                        | 88.12   | S11° 03' 32.52"E |        |
| L111                        | 74.62   | S3° 00' 26.05"E  |        |
| L113                        | 63.28   | S15° 53' 54.47"E |        |
| L115                        | 256.06  | S6° 52' 05.32"E  |        |
| L118                        | 57.18   | S47° 41' 39.66"W |        |
| L119                        | 50.00   | S42° 18' 20.34"E |        |
| L120                        | 50.00   | N47° 41' 39.66"E |        |
| L121                        | 409.67  | S42° 18' 20.34"E |        |
| L123                        | 51.51   | S44° 56' 03.05"W |        |
| L124                        | 407.70  | N45° 03' 56.97"W |        |
| L126                        | 336.03  | S84° 05' 03.02"W |        |
| L127                        | 3013.39 | N1° 54' 23.06"E  |        |
| L128                        | 1276.04 | N90° 00' 00.00"E |        |
| L129                        | 1332.57 | N0° 44' 16.21"E  |        |
| L130                        | 1951.86 | N50° 30' 29.12"E |        |
| L131                        | 1295.26 | N3° 04' 23.93"E  |        |
| L132                        | 1363.29 | S88° 32' 16.31"E |        |
| L133                        | 2613.35 | N2° 22' 47.84"E  |        |
| L134                        | 43.58   | N62° 21' 10.52"E |        |
| L136                        | 11.60   | S83° 27' 26.51"E |        |
| L137                        | 208.34  | S83° 27' 26.51"E |        |
| L139                        | 26.61   | S5° 20' 02.06"E  |        |
| L140                        | 78.50   | S5° 20' 02.06"E  |        |
| L141                        | 6.80    | S47° 41' 39.66"W |        |
| L142                        | 256.06  | N6° 52' 05.32"W  |        |
| L143                        | 63.28   | N15° 53' 54.47"W |        |
| L144                        | 74.62   | N3° 00' 26.05"W  |        |
| L145                        | 88.12   | N11° 03' 32.52"W |        |
| L146                        | 158.77  | N25° 29' 42.88"E |        |
| L147                        | 58.41   | N2° 02' 31.97"W  |        |
| L148                        | 103.50  | N13° 52' 06.46"W |        |
| L149                        | 69.64   | N33° 00' 31.57"E |        |
| L150                        | 9.86    | N15° 22' 24.48"E |        |
| L151                        | 30.19   | N32° 36' 19.03"E |        |
| L152                        | 141.20  | N41° 44' 48.60"E |        |
| L153                        | 137.07  | N13° 03' 10.23"E |        |
| L154                        | 22.88   | N23° 59' 30.29"E |        |
| L155                        | 21.27   | N11° 27' 18.51"E |        |
| L156                        | 88.44   | N86° 16' 13.52"E |        |
| L157                        | 46.50   | N66° 45' 58.57"E |        |
| L158                        | 77.67   | S88° 07' 19.63"E |        |
| L159                        | 121.67  | N60° 01' 12.66"E |        |
| L160                        | 49.10   | N32° 15' 58.96"E |        |
| L161                        | 18.59   | N59° 15' 55.52"E |        |
| L162                        | 33.73   | N42° 37' 50.58"E |        |
| L163                        | 60.83   | N64° 23' 28.92"E |        |
| L164                        | 90.95   | N28° 31' 45.05"W |        |
| L165                        | 204.55  | N6° 16' 13.11"E  |        |
| L166                        | 110.42  | N11° 34' 16.71"E |        |
| L167                        | 24.30   | N51° 19' 26.46"E |        |
| L168                        | 26.35   | N1° 43' 39.15"W  |        |
| L169                        | 198.81  | N38° 54' 35.74"E |        |
| L170                        | 190.37  | N47° 23' 17.72"E |        |
| L171                        | 136.05  | N37° 20' 51.57"E |        |
| L172                        | 10.54   | N56° 34' 28.07"E |        |
| L173                        | 333.13  | N41° 16' 58.36"E |        |



**COUNTY OF LAKE  
ANASU FARMS SUBDIVISION  
TENTATIVE SUBDIVISION MAP; PL-26-9**

**EXPIRES JULY 23, 2028**

Pursuant to the approval of the Lake County Planning Commission on July 23, 2026, there is hereby granted to **Kevin Case, and Lotusland Investment Holdings, Inc.** approval of a **tentative subdivision map to allow eight phases, one encroachment from Butts Canyon Road, 34 new parcels (30 resort residential, 1 commercial, 3 facility) and six peripheral parcels (from 7 existing parcels),** on property located **among 16,000-acre Guenoc Valley Site with the nearest property 21423 Butts Canyon Rd, Middletown (APNs: 014-320-08, 013-022-16, 013-022-17, 013-022-20, 013-022-21, 013-022-22, 013-022-23),** subject to the following conditions:

**A. General**

1. The Tentative Map hereby granted shall substantially conform to the project as described in the Community Development Department Application, and tentative subdivision map dated February 9, 2026. The configuration of the final subdivision map may include minor amendments, provided that all proposed parcels comply with the zoning ordinance and general plan, and the modification does not result in any increased environmental impact. Any modification shall be subject to approval by the Community Development Director and the Department of Public Works.
2. All Conditions of Approval and Mitigation measures within the Mitigation Monitoring Reporting Program (MMRP) adopted with the Programmatic EIR (SCH No. 2019049134) for the Guenoc Valley Mixed Use Planned Development Project (PL-25-112) shall be implemented. The Conditions of Approval and MMRP are attached herein as Exhibits A and B.
3. All activities, as applicable, shall be in conformance with the plans prepared for this permit and for compliance with EIR mitigation measures. These include, but are not limited to: Serpentine Dust Control Plan, Construction Emissions Control Plan, Wildfire Prevention Plan, Stormwater Pollution Prevention Plan, Bullfrog Management Plan, Evacuation and Grading Haul Routes Plan, and the Tribal Cultural Resources Monitoring Agreement.
4. Prior to recordation of the final map, monuments shall be set at all parcel corners and right of way curve points, subject to the approval of the County Surveyor.
5. All existing easements shall be shown on the final parcel map.
6. A final subdivision map shall not be recorded if development has occurred on the property that would be inconsistent with the Zoning Ordinance or other applicable code should the map be recorded.
7. Prior to recording the final map, all current and supplemental taxes shall be paid.
8. All future development shall be in accordance with the approved Guenoc Valley Zoning District requirements and Guenoc Valley Report Phase I Design Standards.

**B. Conditions from PL-25-112 Guenoc Valley Mixed-Use Planned Development Project**

1. The conditions of approval from PL-25-112 and associated Development Agreement, Environmental Impact Report, and Settlement Agreement related to tentative and final maps are copied below for reference. All other conditions related to PL-25-112 are attached as Exhibit "A" and shall be implemented for construction and future development, as applicable.
2. Centerline well monuments shall be set at all road intersections and at the beginning and ending of all public roadway curves. All other subdivision boundary, lot corner and right-of-way points shall be monumented, consistent with Section 17-29 of the Lake County Subdivision Ordinance, and subject to approval by the Lake County Surveyor.



3. All existing and proposed easements shall be shown and clearly labeled on final maps, and there shall be indicated on the map the acreage or square footage for each parcel created, being shown to the nearest 0.01 of an acre. Public utility easements shall be dedicated to encompass any electrical and/or communication facilities that do not lie within existing easements.
4. A final map shall not be recorded if development has occurred on the property that would be inconsistent with the Lake County Zoning Ordinance and General Plan, or other applicable code should the map be recorded.
5. The configuration of final maps may include minor amendments, provided that all proposed parcels comply with the Zoning Ordinance, General Plan, and the modification does not result in any increased environmental impact. Any modification shall be subject to approval by the Community Development Director and the Department of Public Works.
6. Prior to recording the final maps, all taxes due shall be paid, and all estimated taxes for the subject property shall be pre-paid to the County Tax Collector.
7. The subdivision shall comply with all requirements of the Lake County Subdivision Ordinance and the State Subdivision Map Act.
8. Easements for fire breaks, wildlife corridors, open spaces, etc., will be created and shown on the final map or will be described and recorded by separate document concurrently with the final map. Deed restrictions on residential parcels will either be described and recorded by separate document or contained within the recorded Covenants, Conditions, and Restrictions (CC&Rs), which will be recorded concurrently with the final map.
9. Preservation of sensitive habitat for the purposes of mitigation that occurs within deed-restricted open space shall be identified within the deed restriction and shall prohibit the development of that area identified for preservation. Preservation within deed restrictions shall be preserved in perpetuity as a condition of the deed.
10. All building envelopes, setbacks, and riparian areas shall be shown on a separate map sheet and recorded concurrently with the final map. Deed restrictions shall be recorded for areas outside of building envelopes.
11. Prior to recordation of the final maps, provisions for post construction BMPs maintenance shall be addressed through CC&Rs or other appropriate mechanism for the subdivision. An operation and maintenance plan for the post construction BMPs shall be approved by the Water Resources Division of the Department of Public Works.
12. For improvements that are within public right-of-way, improvement plans and a cost estimate prepared by a registered civil engineer shall be submitted to the Department of Public Works. Improvements shall be installed as shown on the approved improvement plans. The subdivider shall submit a stipulated deposit of 2% of the engineers cost estimates to the Department of Public Works prior to plan review.
13. Prior to the recordation of the final maps, the subdivider shall submit plans for the location of common postal facilities to the Middletown Postmaster and Department of Public Works for approval, prior to installation. Any additional right-of-way necessary for the postal facilities shall be irrevocably offered for dedication to the County.
14. Prior to recordation of the final maps, the interior roads shall be designed and constructed in accordance with the standards compiled and stated within the project's Development Agreement, which references Lake County Road, CalFire and American Association of State Highway and Transportation Officials standards. Any revisions of these standards will require approval from the Department of Public Works through alternative design standards or a "deviation".
15. The entire road network within the Guenoc Valley shall be irrevocably offered for dedication on the final maps as a public roadway and public utility easement. All roadways shall be named, subject to the approval of the County Surveyor. The roadway and utility easements to remain private to the subdivision will be delineated on the final maps and addressed through the offers of dedications.
16. Any cuts and fills necessary for the construction of the publicly dedicated roadways that lie outside the rights-of-way provided shall be offered for dedication as slope easements.



17. Prior to recording the final maps, the permit holder shall pay all Improvement Fees. For further information, please contact the Lake County Public Services at (707) 262-1618.
18. There shall not be any wells created or operated by the permit holder in the Callayomi Valley Groundwater Basin except for the following:
  - a) On-site wells within the approved Guenoc Valley Project site; and
  - b) One well within the Off-Site Well site if the Callayomi Valley Water District does not build and operate a well on the site.
19. EIR Mitigation Measure 3.13-1: Prior to issuance of 1 Grading Permits for Phase 1, the Developer shall execute and deliver to Caltrans an agreement to mitigate the impacts to the intersection of SR-29 and Butts Canyon Road by paying to Caltrans the cost of the following:

State Route 29 at Butts Canyon Road (Intersection #7) – Installation of an intersection control improvement—roundabout or three-way traffic signal with crosswalks, depending on results of an Intersection Safety and Operational Assessment Process (ISOAP).
20. EIR Mitigation Measure PC 3.2: All roads within the Guenoc Valley District shall be two-way roads that comply with State slope and width requirements.
21. EIR Mitigation Measure PC 3.2-2: For every acre of prime farmland and unique farmland identified by the Farmland Mapping and Monitoring Program that is converted to non-agricultural uses, the Applicant shall place an agricultural conservation easement, deed restriction, or other form of long-term permanent protection on farmland of equivalent quality to the farmland that would be converted. This farmland shall be permanently protected and located within 100 miles of the Guenoc Valley Site. This farmland shall also have access to necessary infrastructure for farmland operations, such as roads. There shall be at least a 100-foot buffer between the easement and residential development (a smaller buffer may be utilized if determined acceptable by the agricultural commissioner). For Phase 1, this will require that approximately 86.7 acres of Prime Farmland, and approximately 193.6 acres of Unique Farmland are permanently preserved in accordance with this mitigation measure. The acreage requirements for future phases will be based on the specific development proposals and associated area of impacted farmland. The County shall verify the precise size of impact and therefore the relative size of land to be conserved prior to approval of the associated final phased tentative maps.
22. EIR Mitigation Measure SAA)iv: As indicated on the Roadway Plan attached as Exhibit D [of the Settlement Agreement], no dead-end, non-looped road segment may exceed one mile in length.
23. EIR Mitigation Measure 3.13-2: The Developer shall execute and deliver to Caltrans an agreement that requires payment, or provides bonding for, a proportionate share of the construction costs of the following improvements. The timing for collection of the fees and implementation of the improvements will be at the discretion of Caltrans as the lead agency.
  - State Route 29 at Hartmann Road (Intersection #5) – Expansion of the existing roundabout or other intersection control improvement, depending on the results of an Intersection Safety and Operational Assessment Process (ISOAP) (ISOAP; required under Baseline plus Phase 1).
  - SR-29 at Spruce Grove Road South (Intersection #3) – Installation of an intersection control improvement—roundabout or three-way traffic signal with crosswalks, depending on results of an ISOAP (required under cumulative plus Phase 1).
  - SR-29 at Hidden Valley Road (Intersection #4) – Installation of an intersection control improvement, roundabout or four-way traffic signal with crosswalks, depending on results of an ISOAP (required under cumulative plus Phase 1).
24. EIR Mitigation Measure 3.4-16: All project activities shall be subject to compliance with the Oak Mitigation Plan, dated March 2024, included as Appendix J to the Draft PREIR. Prior to approval of 8 Final Maps, the Applicant shall demonstrate compliance with the Oak Mitigation Plan related to impacts to oaks and oak woodland canopy. Prior to issuance of grading and 2 Building Permits, the Applicant or applicants for grading and 2 Building Permits shall demonstrate compliance with the Oak Mitigation Plan related to impacts to oaks, mitigation compliance, building envelope and deed restrictions. The Oak Mitigation



Plan for this project addresses impacts to oaks as a result of the Proposed Project. The Oak Mitigation Plan was prepared in accordance with the Lake County General Plan. The Oak Mitigation Plan includes the following:

- Goals of the mitigation plan;
- Method of impact identification appropriate for all phases of construction;
- Discussion on compliance with the Lake County General Plan and 2008 Oak Tree Replacement Plan per the 2009 FEIR;
- Proposed compensatory action suitable to meet mitigation goals;
- Compensatory planting ratios of 2:1 for smaller trees and 5:1 for larger trees;
- Success criteria for mitigation such that compensatory plantings for impacts to individual trees achieve a minimum of 80 percent success rate;
- Preservation for impacts to valley oak woodland, when applied, shall be no less than 3:1 of in-kind habitat type acreage, and 2:1 for all other types of oak woodland;
- A requirement of at least 7 years of monitoring, adaptive management, and reporting throughout the mitigation process; and
- Limitation of the total impact to oak woodlands to 1 acre on residential lots consistent with the design guidelines.

The Oak Mitigation Plan shall be subject to Lake County review and approval prior to ground disturbance. Oaks present on the Middletown Housing Site shall be avoided. If full avoidance of oaks is not feasible, the measures in the Oak Mitigation Plan prepared for the Guenoc Valley Site shall apply. Replanting for oaks removed on the Middletown Housing Site may occur on the Middletown Housing Site or the Guenoc Valley Site.

25. Plans for the Anasu Farms subdivision must include adequate clearance and protection for PG&E facilities and easements.

### **C. Grading**

1. The following measures will be implemented by the Proposed Project to reduce emissions of criteria pollutants and DPM from construction.

Prior to approval of Grading or Improvement Plans- (whichever occurs first) the Applicant shall submit to LCAQMD a Construction Emission/Dust Control Plan within 30 days Prior to Groundbreaking. The following shall be listed on the improvement plans as standard notes:

- During construction, emissions of fugitive dust from any active operation, open storage pile, or disturbed surface area, shall be controlled so that dust does not remain visible in the atmosphere beyond the boundary line of the emission source.
- When wind speeds result in dust emissions crossing property lines, and despite the application of dust control measures, grading and earthmoving operations shall be suspended and inactive disturbed surface areas shall be stabilized.
- Fugitive dust generated by active operations, open storage piles, or from a disturbed surface area shall not result in such opacity as to obscure an observer's view to a degree equal to or greater than does smoke as dark or darker in shade as that designated as No. 2 on the Ringlemann Chart (or 40 percent opacity).
- All exposed soils be watered as needed to prevent dust density as described above and in order to prevent dust from visibly exiting the property.
- Any visible tracked out dirt on a paved road where vehicles enter and exit the work area must be removed at the end of the workday or at least one time per day. Removal shall be accomplished by using wet sweeping or a HEPA filter equipped vacuum device. Dirt from vehicles exiting the site shall be removed through the use of a gravel pad, a tire shaker, a wheel wash system, or a pavement extending for not less than 50 feet from the intersection with the paved



public road.

- All haul trucks transporting soil, sand, or other loose material offsite shall be covered.
- All vehicle speeds on unpaved roads shall be limited to 25 mph.
- During construction the contractor shall, where feasible, utilize existing power sources (e.g., power poles) or clean fuel (i.e. gasoline, biodiesel, natural gas) generators rather than temporary diesel power generators.
- Idling times shall be minimized either by shutting equipment off when not in use or reducing the maximum idling time to 5 minutes (as required by the California airborne toxics control measure Title 13, Section 2485 of California Code of Regulations [CCR]). Clear signage shall be provided for construction workers at all access points. Signs shall be posted in the designated queuing areas of the construction site to remind off-road equipment operators that idling time is limited to a maximum of 5 minutes.

In conjunction with the submittal of the Construction Emission/Dust Control Plan, the prime contractor shall submit to the District a comprehensive inventory (i.e., make, model, year, emission rating) of all the heavy-duty off-road equipment (50 horsepower or greater) that will be used in aggregate of 40 or more hours for the construction project. If any new equipment is added after submission of the inventory, the prime contractor shall contact the LCAQMD prior to the new equipment being utilized. Except in the event of emergency work, when no notice shall be required, the project representative shall provide the District, at least one business day prior to the use of subject heavy-duty off road equipment with the anticipated construction timeline including start date, name and phone number of the property owner, project manager and on-site foreman. The equipment inventory shall meet the minimum requirements as specified in MM 3.3-1c, including the use of Tier 4 engines or better to the maximum extent feasible, and Level 3 Diesel Filters during all phases of development.

To the maximum extent feasible, the contractors shall utilize Tier 4 engines or better, and Level 3 Diesel Filters during all phases of development. Compliance must be demonstrated with submittal of the equipment inventory, prior to approval of dust control plans

**D. Transportation/Traffic & Noise**

1. The applicant shall submit a Cost Estimate and Improvement Plans prepared by a Registered Civil Engineer for all roadway improvements. A Signed Engineering/Inspection Agreement with stipulated deposit of 2% of the Engineer's Cost Estimate shall be submitted prior to plan review.

**E. Recreation**

1. Prior to recordation of the final map, the subdivider shall submit park in-lieu "Quimby" fees to the Lake County Public Services Department in an amount consistent with the Subdivision Ordinance.

**F. County of Lake Surveyor**

1. Applicant(s) shall submit an exhibit to the Surveyor's Office that identifies the "Resort Residential" Lots, "Commercial" Lot and "Facility" Lots.
2. Preliminary title report dated within the last six (6) months shall be submitted with the 1<sup>st</sup> review of the Final Map.
3. All Easements and widths of record shall be shown on the Final Map.
4. All Proposed Easements shall be shown on the Final Map.
5. All roadways shall be offered for dedication as a Roadway and Public Utilities Easement.
6. All road rights-of way widths shall comply with the requirements of Section 17-25.13 of the Lake County Subdivision Regulation Ordinance. All roads within the subdivision shall be labeled "**Not a County Maintained Road**" on the Final Map.



- 7. Prior to recordation of the Final Map, all corners and Right-of Way and angle points shall be monumented or bonded for as described in Section 17-29.9 of the Lake County Subdivision Regulation Ordinance. All Monuments shall comply with Section 17-29, et. seq. of the Lake County Subdivision Regulation Ordinance
- 8. Pursuant to Government Code Section 66492 & 66493, prior to recordation of the Final Map the subdivider shall: (1) Obtain a Certificate from the Lake County Tax Collector stating that all current taxes and any delinquent taxes have been paid and; (2) Pay a security deposit (or bond) for taxes that are a lien, but not yet due and payable.
- 9. Road Names and addressing shall be approved by the County Surveyor’s Office so as to not conflict with E911 and/or emergency services.
- 10. The applicant shall create to the satisfaction of County of Lake an organization or association for the maintenance including, but not limited to, the private roads, appurtenant drainage systems, water systems and sanitation sewer systems, and the Peripheral lots.
- 11. Prior to recordation of the Final Map a Subdivision Guarantee shall be submitted to the Surveyor’s Office.
- 12. The life of the Vesting Phased Tentative Map shall adhere to Government Code 66452.6, et. seq.

**G. Timing/Mitigation Monitoring**

- 1. The permit holder shall permit the County of Lake or representative(s) or designee(s) to make periodic inspections at any reasonable time deemed necessary in order to assure that the activity being performed under authority of this permit is in accordance with the terms and conditions prescribed herein.
- 2. This approved map shall expire on July 23, 2028 unless an extension has been granted consistent with the Subdivision Ordinance and the Subdivision Map Act.

**COMMUNITY DEVELOPMENT DIRECTOR**  
**Mireya G. Turner**

Prepared by: ms By: \_\_\_\_\_  
Planning Commission Clerk

**ACCEPTANCE**

I have read and understand the foregoing conditions and agree to each and every term and condition thereof.

Date: \_\_\_\_\_  
Applicant or Authorized Agent



## COUNTY OF LAKE

PL-25-112: Environmental Impact Report (EIR 24-01), Development Agreement (DA 24-01), Zoning Ordinance Amendment (AM 24-01), General Plan Amendment (GPAP 24-01) (map), General Plan Amendment (GPAP 24-02) (text), Rezone (RZ 24-01), General Plan of Development (GPD 24-01), Use Permit (UP 24-05), Rezone (RZ 24-02), Use Permit (UP 24-08)

LOTUSLAND INVESTMENT HOLDINGS, INC.  
GUENOC VALLEY MIXED USE PLANNED DEVELOPMENT PROJECT  
CONDITIONS OF APPROVAL, Updated August 8, 2025

Expires if not used by: August 8, 2027

There is hereby granted to Lotusland Investment Holdings, Inc. PL-25-112: Environmental Impact Report (EIR 24-01), Development Agreement (DA 24-01), Zoning Ordinance Amendment (AM 24-01), General Plan Amendment (GPAP 24-01) (map), General Plan Amendment (GPAP 24-02) (text), Rezone (RZ 24-01, Guenoc Valley Site), General Plan of Development (GPD 24-01), Use Permit (UP 24-05), Rezone (RZ 24-02, Santa Clara, Middletown Housing Site), Use Permit (UP 24-08) to allow a Mixed Use Planned Development Project comprised of 82 assessor parcels (69 legal parcels), further described in Exhibit B-1 to the Guenoc Valley Development Agreement, the Middletown Housing Site located at 21000 Santa Clara Avenue in Middletown, further described as assessor parcel number 014-380-09, and the Butts Canyon Property, further described as assessor parcel numbers 014-430-07, -09 subject to the following terms and conditions.

**A. GENERAL CONDITIONS**

1. The use hereby permitted shall substantially conform to the project submittal and application packet, site plans and all requirements in the environmental document and any conditions of approval imposed by the review authority to allow the Guenoc Valley Mixed Use Planned Development Project. The Community Development Department Director may approve, in writing, minor modifications that do not result in increased environmental impacts.
2. This permit does not abridge or supersede the regulatory powers or permit requirements of any federal, state, local agency, special district, or department which may retain a regulatory or advisory function as specified by statute or ordinance. The applicant shall obtain permits as may be required from each agency.
3. The permit holder is responsible for ensuring that all project workers are informed of understand and agree to abide by the approved plans and project conditions.

Applicant Initials:           *AS*          

Date: 1/27/26

Page 1

4. Prior to construction, the applicant shall submit and obtain the necessary Building Permits from the Community Development Department to develop the resort. Once a complete Building Permit Application Packet has been submitted, the Planning Department shall perform a Zoning Clearance (ZC) to ensure the proposed use has met all necessary regulations and adheres to the approved project and shall conduct the necessary site inspections.
5. All construction documents shall be reviewed and approved by a California-Licensed Professional Civil Engineer or Architect, and be constructed to pertinent code-compliant specifications, subject to review and approval of the Community Development Department.
6. The permit holder shall comply and maintain necessary permits from the Lake County Environmental Health Department regarding the California Retail Food Code and Health and Safety Regulations. The applicant shall contact the Department of Environmental Health at (707) 263-1163 for further information.
7. Prior to operation of any food facility, the permit holder shall submit three sets of complete and supporting documents to the Division of Environmental Health for review and approval, including maintaining the necessary permits. The permit holder shall submit a copy of said permit to the Community Development Department within 30 days of obtaining such permit.
8. Prior to occupancy, all structure(s) shall meet accessibility standards. Please contact the Community Development Department - Building Division for more information.
9. Prior to occupancy, all accessible compliant parking areas, routes of travel, building access and/or bathrooms shall meet all California Building Code Requirements.
10. Prior to occupancy, all employees shall have access to restrooms and hand-wash stations. The restrooms and hand washing stations shall meet all accessibility requirements.
11. Prior to building permits, the permit holder shall adhere to all requirements of Chapter 13 of the Lake County Code, including but not limited to adherence with the hazardous vegetation requirements, maintain vegetation in accordance with the Specific Plan of Development and the Wildfire Prevention Plan, and adhere to all requirements of the Guenoc Valley District Zoning Ordinance.
12. The proper storage of equipment, removal of litter and waste, and cutting of weeds or grass shall not constitute a breeding place or harborage for pests.

Applicant Initials: AA  
Date: 1/27/16

Page 2



13. Any outdoor storage shall be maintained in an orderly manner and shall not create a fire, safety, health, and/or sanitary hazard.
14. This use permit approval shall not become effective, operative, vested or final until the applicant submits the applicable California Department of Fish & Wildlife filing fees as required by California Environmental Quality Act statute, Section 21089(b) and Fish and Game Code Section 711.4. Any remaining such fees should be submitted to the Community Development Department within five days of approval of the project.
15. In cases of conflict between permit terms and measures presented herein, those permit terms and conditions shall supersede those presented within the Environmental Impact Report.
16. The applicant shall include all of these requirements in construction contracts. The project shall comply with Section 41.7 of the Lake County Zoning Ordinance that specifies that all uses involving the use or storage of combustible and explosive, caustic or otherwise hazardous materials shall comply with all applicable local, state and federal safety standards and shall be provided with adequate safety devices against the hazard of fire and explosion, and adequate firefighting and fire suppression equipment.
17. All equipment shall be maintained and operated in a manner that minimizes any spill or leak of hazardous materials. Hazardous materials and contaminated soil shall be stored, transported, and disposed of consistent with applicable local, state and federal regulations.
18. All hazardous waste shall not be disposed of on-site without review or permits from Environmental Health Division, the California Regional Water Control Board, and/or the California Air Resources Board. Collected hazardous or toxic waste materials shall be recycled or disposed of through a registered waste hauler to an approved site legally authorized to accept such material.
19. The storage of potentially hazardous materials shall be located at least 100 feet from any existing water well. These materials shall not be allowed to leak onto the ground or contaminate surface waters. Collected hazardous or toxic materials shall be recycled or disposed of through a registered waste hauler to an approved site legally authorized to accept such materials.
20. If the operation includes storage of hazardous materials equal to or greater than 55 gallons of a liquid, 500 pounds of a solid, or 200 cubic feet of compressed gas, then a Hazardous Materials Inventory Disclosure Statement/Business Plan shall be submitted and maintained in compliance with requirements of Lake County Environmental Health Division. Industrial

Applicant Initials:   
Date: 1/27/26

Page 3

waste shall not be disposed of on site without review or permit from Lake County Environmental Health Division or the California Regional Water Quality Control Board. The permit holder shall comply with petroleum fuel storage tank regulations if fuel is to be stored on site.

21. Any spills of oils, fluids, fuel, concrete, or other hazardous construction material shall be immediately cleaned up. All equipment and materials shall be stored in the staging areas away from the creek; vehicles and equipment shall receive proper and timely maintenance.
22. The project design shall incorporate appropriate Best Management Practices (BMP) consistent with County and State storm water drainage regulations to prevent or reduce discharge of all construction or post-construction pollutants and hazardous materials offsite or into the creek. The site shall be monitored during the rainy season (October 15-April 15) and erosion controls maintained.
23. Vehicles and equipment shall be maintained and operated in a manner to prevent hot surfaces, sparks or any other heat sources from igniting grasses, brush or other highly combustible material.
24. Hazardous waste (including industrial waste) must be handled according to all Hazardous Waste Control and Generator regulations. Waste shall not be disposed of on-site without review or permits from Environmental Health Department, the California Regional Water Control Board, and/or the Air Quality Board. Collected hazardous or toxic waste materials shall be recycled or disposed of through a registered waste hauler to an approved site legally authorized to accept such material. The permit holder shall comply with petroleum fuel storage tank regulations if fuel is to be stored on site.
25. Industrial Wastewater or any other classification of waste shall not be disposed on- site without review or permits from the Environmental Health Division, the Regional Water Quality Control Board and/or the California Air Resources Board.
26. Collected hazardous or toxic waste materials shall be recycled or disposed of through a registered waste hauler to an approved site legally authorized to accept such materials.
27. Any waste detrimental to a public sewer system and/or a sewage treatment plant, shall not be discharged into a public sewer system unless they have been pretreated to the degree required Lake County Special Districts. The permit holder may contact the Lake County Special District at (707) 263-0119 for specifics.

Applicant Initials:



Date: 1/27/26

Page 4



28. All employees and staff shall be properly trained in and wear Personnel Protective Equipment in accordance with all federal, state and local regulations regarding handling any biological and chemical agents.
29. Prior to any grading activities and/or road building, the permit holder shall submit and obtain a grading permit from the Community Development Department.
30. The project design shall incorporate appropriate BMPs consistent with County and State Storm Water Drainage Regulations to the maximum extent practicable. The project design shall incorporate BMPs to the maximum extent practicable to prevent or reduce discharge of all construction or post-construction pollutants into the County storm drainage system. BMPs typically include scheduling of activities, erosion and sediment control, operation and maintenance procedures and other measures in accordance with Chapters 29 and 30 of the Lake County Code. Issuance of an initial grading permit for temporary mass grading activities only, and not for the construction of permanent structures or hardscape surfaces, may omit measures for post-construction BMPs and defer the final design and implementation of such measures to subsequent grading or building permits that include final structures or surfaces. All mass grading activities must, however, be accompanied by temporary erosion and sediment control measures included in the approved project Storm Water Pollution Protection Plan.
31. A financial contribution to the Department of Public Works Road Division shall be paid for impacts to the segment of Butts Canyon Road and the beginning of this subdivision. Alternatively, the developer may provide alternate mitigation for impacts to this segment of road with an asphalt overlay, following all necessary preparation work (digouts, patching, etc.).
32. Prior to the issuance of building permits, the permit holder shall obtain all necessary encroachment permits from the Department of Public Works and/or Caltrans regarding road improvements, development, and/or any work within a right-of-way. The applicant shall submit a copy of said permit to the Community Development Department within 30 days of obtaining such permit.
33. Any new fill related to road construction shall be compacted consistent with the requirements of the Department of Public Works, or the project's geotechnical engineering recommendations, whichever is more stringent. The source of any new fill shall be from a location consistent with the requirements of the Lake County Zoning Ordinance.
34. Devices which generate electromagnetic interference shall be so operated as not to cause interference with any activity carried on beyond the

Applicant Initials:   
Date: 1/17/26

Page 5

boundary line of the property upon which the device is located. Public utilities shall comply with all applicable state and federal regulations.

35. Setbacks are incorporated into the Design Guidelines and shall be administered. The County will review compliance prior to issuance of building permits. The applicant shall include all of these requirements in construction contracts.
36. The permit holder shall permit the County of Lake or representative(s) or designee(s) to make periodic and/or annual inspections at any reasonable time deemed necessary to assure that the activity being performed under authority of this permit is in accordance with the terms and conditions prescribed herein.
37. This permit may be revoked if the use for which the permit was granted is conducted as to be detrimental to the public health, safety, or welfare or as to be a nuisance.
38. Prior to issuance of building permits, the permit holder shall pay the Annual Compliance Monitoring Fee in accordance with the County's Master Fee Schedule to the Community Development Department until all conditions of approval are met.
39. Prior to building permit final, the permit holder shall submit a summary response in writing establishing compliance with the approved conditions of approval, including dates of compliance and referencing documents and/or other evidence of compliance to the Community Development Department for review and approval, including scheduling an inspection with the Community Development Department to ensure all conditions of approval have been met.
40. This permit shall be valid for an indefinite period of time unless it expires or is revoked pursuant to the terms of this permit and/or Chapter 21 of the Lake County Code.
41. This permit does not abridge or supersede the regulatory powers or permit requirements of any federal, state, local agency, special district or department which may retain a regulatory or advisory function as specified by statute or ordinance. The applicant shall obtain permits as may be required from each agency.
42. Prior to construction, the applicant shall submit and obtain the necessary building permits from the Community Development Department to develop the resort. Once a complete building permit application packet has been submitted, the planning department would perform a zoning clearance to

Applicant Initials:                       
Date: 1/27/26

Page 6



ensure the proposed use has met all necessary regulations and adheres to the approved project and would conduct the necessary site inspections.

43. All construction shall be reviewed and approved by a California licensed professional civil engineer or architect, and be constructed to those specifications, subject to review and approval of the Community Development Department.
44. Any outdoor storage shall be maintained in an orderly manner and shall not create a fire, safety, health and/or sanitary hazard.
45. Centerline well monuments shall be set at all road intersections and at the beginning and ending of all public roadway curves. All other subdivision boundary, lot corner and right-of-way points shall be monumented, consistent with Section 17-29 of the Lake County Subdivision Ordinance, and subject to approval by the Lake County Surveyor.
46. All existing and proposed easements shall be shown and clearly labeled on final maps, and there shall be indicated on the map the acreage or square footage for each parcel created, being shown to the nearest 0.01 of an acre. Public utility easements shall be dedicated to encompass any electrical and/or communication facilities that do not lie within existing easements.
47. A final map shall not be recorded if development has occurred on the property that would be inconsistent with the Lake County Zoning Ordinance and General Plan, or other applicable code should the map be recorded.
48. The configuration of final maps may include minor amendments, provided that all proposed parcels comply with the Zoning Ordinance, General Plan, and the modification does not result in any increased environmental impact. Any modification shall be subject to approval by the Community Development Director and the Department of Public Works.
49. Prior to recording the final maps, all taxes due shall be paid, and all estimated taxes for the subject property shall be pre-paid to the County Tax Collector.
50. The subdivision shall comply with all requirements of the Lake County Subdivision Ordinance and the State Subdivision Map Act.
51. Easements for fire breaks, wildlife corridors, open spaces, etc., will be created and shown on the final map or will be described and recorded by separate document concurrently with the final map. Deed restrictions on residential parcels will either be described and recorded by separate document or contained within the recorded Covenants, Conditions, and

Applicant Initials:

Date: 1/27/26

Page 7

Restrictions (CC&Rs), which will be recorded concurrently with the final map.

52. Preservation of sensitive habitat for the purposes of mitigation that occurs within deed-restricted open space shall be identified within the deed restriction and shall prohibit the development of that area identified for preservation. Preservation within deed restrictions shall be preserved in perpetuity as a condition of the deed.
53. All building envelopes, setbacks, and riparian areas shall be shown on a separate map sheet and recorded concurrently with the final map. Deed restrictions shall be recorded for areas outside of building envelopes.
54. Drainage easements shall be shown on the final maps and offered for dedication. Maintenance of the drainage facilities shall be covered under CC&Rs or other acceptable agreement.
55. Prior to any development and/or building permit submittal, Engineered Drainage Plans and Calculations, including an Operation and Maintenance Plan for proposed post-construction BMPs shall be submitted to the Lake County Water Resources Department for review and approval. The installed BMPs shall be maintained for the life of the project.
56. All new construction shall incorporate BMPs to the maximum extent practicable to prevent or reduce discharge of all construction or post construction pollutants into the County storm drainage system and Clear Lake. Typical BMPs include scheduling of activities, temporary erosion and sediment control, operation and maintenance procedures and other measures in accordance with Chapter 29 and 30 of the Lake County Code. The applicant shall contact the Water Resource Department at (707) 263-2344 for further details.
57. Prior to recordation of the final maps, provisions for post construction BMPs maintenance shall be addressed through CC&Rs or other appropriate mechanism for the subdivision. An operation and maintenance plan for the post construction BMPs shall be approved by the Water Resources Division of the Department of Public Works.
58. For improvements that are within public right-of-way, improvement plans and a cost estimate prepared by a registered civil engineer shall be submitted to the Department of Public Works. Improvements shall be installed as shown on the approved improvement plans. The subdivider shall submit a stipulated deposit of 2% of the engineers cost estimates to the Department of Public Works prior to plan review.

Applicant Initials: AS  
Date: 1/27/26

Page 8



59. Prior to the recordation of the final maps, the subdivider shall submit plans for the location of common postal facilities to the Middletown Postmaster and Department of Public Works for approval, prior to installation. Any additional right-of-way necessary for the postal facilities shall be irrevocably offered for dedication to the County.
60. Prior to recordation of the final maps, the interior roads shall be designed and constructed in accordance with the standards compiled and stated within the project's Development Agreement, which references Lake County Road, CalFire and American Association of State Highway and Transportation Officials standards. Any revisions of these standards will require approval from the Department of Public Works through alternative design standards or a "deviation".
61. The entire road network within the Guenoc Valley shall be irrevocably offered for dedication on the final maps as a public roadway and public utility easement. All roadways shall be named, subject to the approval of the County Surveyor. The roadway and utility easements to remain private to the subdivision will be delineated on the final maps and addressed through the offers of dedications.
62. Any cuts and fills necessary for the construction of the publicly dedicated roadways that lie outside the rights-of-way provided shall be offered for dedication as slope easements.
63. Prior to recording the final maps, the permit holder shall pay all Improvement Fees. For further information, please contact the Lake County Public Services at (707) 262-1618.
64. There shall not be any wells created or operated by the permit holder in the Callayomi Valley Groundwater Basin except for the following:
  - a. On-site wells within the approved Guenoc Valley Project site; and
  - b. One well within the Off-Site Well site if the Callayomi Valley Water District does not build and operate a well on the site.

**B. MITIGATION MONITORING AND REPORTING PROGRAM**

1. The proposed project shall implement and substantially comply with all mitigation measures, project commitments, and settlement agreement terms included in the Updated Mitigation Monitoring and Reporting Program approved by the Planning Commission on August 8, 2025.

Applicant Initials:                       
Date: 1/27/26

Page 9

### C. TIMING & MITIGATION MONITORING

1. The applicant shall permit the County of Lake or representative(s) or designee(s) to make periodic and/or annual inspections at any reasonable time deemed necessary to assure that the activity performed under the authority of this permit is under the terms and conditions prescribed herein.
2. This permit shall be null and void if not used by August 8, 2027, or if the use is abandoned for two years. Once activated, this permit is valid unless the use is discontinued for two years or if this permit is revoked due to non-compliance with these conditions.
3. Prior to this use permit becoming valid, effective, or operative, the applicant shall coordinate with the Community Development Department and enter into an Indemnification Agreement with the County. The Indemnification Agreement holds harmless the County and its officers, agents, and employees from actions or claims of any description brought on account of any injury or damages sustained, by any person or property resulting from the issuance of the permit and the conduct of the activities authorized under said permit.
4. The site shall be restored to its original state within six (6) months of the expiration of the use permit, termination of use, or abandonment of the site. The applicant shall enter into a Site Restoration Agreement subject to the approval of the Community Development Director or their designee.
5. This permit may be revoked if the use for which the permit was granted is concluded to be detrimental to public health, safety, or welfare or as to be a nuisance. This permit shall be valid until it expires or is revoked pursuant to the terms of this permit and/or Chapter 21 of the Lake County Code and the terms of the approved Development Agreement.

Applicant Initials: AX  
Date: 1/27/26

Page 10



Mireya G. Turner, Director  
COMMUNITY DEVELOPMENT DEPARTMENT

Prepared by: LH

by: Pamela Miles  
Pamela Miles, Office Assistant III

ACCEPTANCE

I have read and understood the foregoing Major Use Permits and agree to each term and condition thereof.

Date: Jan 27<sup>th</sup> 2026

Alex Xu  
Applicant or Authorized Agent Signature

Alex Xu  
Printed Name of Authorized Agent

Applicant Initials: AX  
Date: 1/27/26

# Mitigation Monitoring and Reporting Program

## INTRODUCTION

The California Environmental Quality Act (CEQA) requires that a Lead Agency establish a program to report on and monitor measures adopted as part of the environmental review process to mitigate or avoid significant effects on the environment. This MMRP is designed to ensure that the mitigation measures identified in the Environmental Impact Report (EIR) for the Guenoc Valley Mixed Use Planned Development Project (Proposed Project) are fully implemented. The MMRP, as presented in **Table 1**, describes the implementation and timing of mitigation responsibilities and standards, and verification of compliance for the mitigation measures identified in the EIR.

**Table 1** presents all applicable requirements of the recommended mitigation measures and is organized in the same order as the contents of the 2020 EIR, as modified by the 2025 Final Partially Revised EIR (PREIR), by topic. Monitoring responsibilities have been distributed between the County and the Applicant under this MMRP. All monitoring actions, once completed, would be reported (in writing) to Lake County staff, which would maintain mitigation monitoring records for the Proposed Project.

The components of the MMRP table are described below.

- **Mitigation Measure:** The mitigation measures are taken verbatim from the 2025 Final PREIR. Mitigation measures are assigned the same number as in the PREIR.
- **Implementation and Timing:** Identifies the timing for the implementation of each action.
- **Responsibility for Implementation:** Identifies the authority responsible for implementing the mitigation measure.
- **Responsibility for Monitoring:** Identifies the authority responsible for monitoring implementation of the mitigation measure.

## PROJECT COMMITMENTS

In addition to mitigation responsibilities listed in **Table 1**, the Applicant has committed to certain actions that would reduce the environmental effects of the Project, including effects related to wildfire prevention and response. A number of project commitments are outlined in **Table 2**, along with the timing, responsible party for implementation, and responsible party of monitoring. It should be noted that **Table 2** is not inclusive of all of the project's environmental commitments. Other measures may be described in the 2020 Final EIR, Volume II, Section 2.0 Project Description, the 2025 PREIR, and other Project documents, including but not limited to the Design Guidelines and zoning ordinance requirements.

## SETTLEMENT AGREEMENT MEASURES

In addition to mitigation responsibilities listed in **Table 1** and project commitments in **Table 2**, the Applicant voluntarily entered into a Settlement Agreement with the State of California. The Settlement Agreement stipulated several Project Modifications that the Applicant has agreed to incorporate into the Project pertaining to wildfire prevention and protection, greenhouse gas emissions, and land use, which are listed in **Table 3**. The timing, responsible party for implementation, and responsible party of monitoring, are also listed in **Table 3**.



**Table 1: Mitigation Monitoring and Reporting Plan**

| Mitigation Measure |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Implementation and Timing                                                                                                                                                                                                                                           | Responsible for Implementing | Responsibility for Monitoring |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <b>3.1</b>         | <b>Aesthetics</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                     |                              |                               |
| <b>3.1-1</b>       | <b>Off-Site Workforce Housing Lighting Design</b><br>All exterior lighting shall be required to be of the fully-cut off and fully-shielded style to direct light downward (and not up or away) from the light source. The applicant shall coordinate with the County to ensure the lighting plan is consistent with the International Dark Sky Association Model Lighting Ordinance.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Lighting plans consistent with these requirements shall be submitted to <b>County prior to approval of building permit.</b> (Use Permit COA)                                                                                                                        | Applicant                    | County                        |
| <b>3.2</b>         | <b>Land Use and Agriculture</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                     |                              |                               |
| <b>3.2-1</b>       | <b>Right-to-Farm Disclosure</b><br>In accordance with the Lake County Code, the Applicant and/or HOA will inform prospective buyers of property, future owners, and current occupants of the project site of the County's Right-to-Farm Ordinance. This notification requirement will be included in the conditions, covenants, and restrictions (CC&Rs) for the Proposed Project.<br><br>Additionally, buyers shall sign an acknowledgement of the disclosure statements once informed of the Right-to-Farm Ordinance, which shall be kept on file by an authorized agent of the Applicant and/or HOA. The notification shall include a description of adjacent agricultural operations so that buyers within the Proposed Project are aware of operational aspects of agricultural uses (e.g. noise, odors, and dust). The disclosure shall also state that operations from the agricultural equipment may routinely exceed the Lake County Noise Ordinance standards. | Applicant to put note on Final Maps. County to <b>require note to be recorded with Final Maps.</b>                                                                                                                                                                  | Applicant/County             | County                        |
| <b>3.2-2</b>       | <b>Agricultural Conservation</b><br>For every acre of prime farmland and unique farmland identified by the Farmland Mapping and Monitoring Program that is converted to non-agricultural uses, the Applicant shall place an agricultural conservation easement, deed restriction, or other form of long-term permanent protection on farmland of equivalent quality to the farmland that would be converted. This farmland shall be permanently protected and located within 100 miles of the Guenoc Valley Site. This farmland shall also have access to necessary infrastructure for farmland operations, such as roads. There shall be at least a 100-foot buffer between the easement and residential development (a smaller buffer may be utilized if determined acceptable by the agricultural commissioner).                                                                                                                                                      | Applicant to record agricultural conservation easement, deed restriction, or other form of long-term permanent protection on farmland as required by County <b>prior to submittal of Final Maps, and provide proof of recordation with submittal of Final Maps.</b> | Applicant/County             | County                        |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Implementation and Timing                                                                                                                                                                                                                                                                     | Responsible for Implementing | Responsibility for Monitoring |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>For Phase 1, this will require that approximately 86.7 acres of Prime Farmland, and approximately 193.6 acres of Unique Farmland are permanently preserved in accordance with this mitigation measure. The acreage requirements for future phases will be based on the specific development proposals and associated area of impacted farmland. The County shall verify the precise size of impact and therefore the relative size of land to be conserved prior to approval of the associated final phased tentative maps.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                               |                              |                               |
| <p><b>3.3 Air Quality</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                               |                              |                               |
| <p><b>3.3-1 Measures to Reduce Short-term Construction Related Emissions</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                               |                              |                               |
| <p>The following measures will be implemented by the Proposed Project to reduce emissions of criteria pollutants and DPM from construction.</p> <p>a) Prior to approval of Grading or Improvement Plans- (whichever occurs first) the Applicant shall submit to LCAQMD a Construction Emission/Dust Control Plan within 30 days prior to groundbreaking. The following shall be listed on the improvement plans as standard notes:</p> <ul style="list-style-type: none"> <li>▪ During construction, emissions of fugitive dust from any active operation, open storage pile, or disturbed surface area, shall be controlled so that dust does not remain visible in the atmosphere beyond the boundary line of the emissionsource.</li> <li>▪ When wind speeds result in dust emissions crossing property lines, and despite the application of dust control measures, grading and earthmoving operations shall be suspended and inactive disturbed surface areas shall be stabilized.</li> <li>▪ Fugitive dust generated by active operations, open storage piles, or from a disturbed surface area shall not result in such opacity as to obscure an observer's view to a degree equal to or greater than does smoke as dark or darker in shade as that designated as No. 2 on the Ringlemann Chart (or 40 percent opacity).</li> <li>▪ All exposed soils be watered as needed to prevent dust density as described above and in order to prevent dust from visibly exiting the property.</li> <li>▪ Any visible tracked out dirt on a paved road where vehicles enter and exit the work area must be removed at the end of the workday or at least one time per day. Removal shall be accomplished by using wet sweeping or a HEPA</li> </ul> | <p>Applicant to submit to LCAQMD a Construction Emission/Dust Control Plan and other information conforming to this Mitigation Measure within 30 days prior to groundbreaking. County to review prior to issuing Grading or Improvement Plans- (whichever occurs first). (Use Permit COA)</p> | <p>Applicant</p>             | <p>County</p>                 |



| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Implementation and Timing | Responsible for Implementing | Responsibility for Monitoring |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------------------------------|-------------------------------|
| <p>filter equipped vacuum device. Dirt from vehicles exiting the site shall be removed through the use of a gravel pad, a tire shaker, a wheel wash system, or a pavement extending for not less than 50 feet from the intersection with the paved public road.</p> <ul style="list-style-type: none"> <li>▪ All haul trucks transporting soil, sand, or other loose material offsite shall be covered.</li> <li>▪ All vehicle speeds on unpaved roads shall be limited to 25 mph.</li> <li>▪ During construction the contractor shall, where feasible, utilize existing power sources (e.g., power poles) or clean fuel (i.e. gasoline, biodiesel, natural gas) generators rather than temporary diesel power generators.</li> <li>▪ Idling times shall be minimized either by shutting equipment off when not in use or reducing the maximum idling time to 5 minutes (as required by the California airborne toxics control measure Title 13, Section 2485 of California Code of Regulations [CCR]). Clear signage shall be provided for construction workers at all access points. Signs shall be posted in the designated queuing areas of the construction site to remind off-road equipment operators that idling time is limited to a maximum of 5 minutes.</li> </ul> <p>b) In conjunction with the submittal of the Construction Emission/Dust Control Plan, the prime contractor shall submit to the District a comprehensive inventory (i.e., make, model, year, emission rating) of all the heavy-duty off-road equipment (50 horsepower or greater) that will be used in aggregate of 40 or more hours for the construction project. If any new equipment is added after submission of the inventory, the prime contractor shall contact the LCAQMD prior to the new equipment being utilized. Except in the event of emergency work, when no notice shall be required, the project representative shall provide the District, at least one business day prior to the use of subject heavy-duty off road equipment with the anticipated construction timeline including start date, name and phone number of the property owner, project manager and on-site foreman. The equipment inventory shall meet the minimum requirements as specified in MM 3.3-1c, including the use of Tier 4 engines or better to the maximum extent feasible, and Level 3 Diesel Filters during all phases of development.</p> <p>c) To the maximum extent feasible, the contractors shall utilize Tier 4 engines or better, and Level 3 Diesel Filters during all phases of development. Compliance must be demonstrated with submittal of the equipment inventory, prior to</p> |                           |                              |                               |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Implementation and Timing                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Responsible for Implementing | Responsibility for Monitoring |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| approval of dust control plans.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                              |                               |
| <p><b>3.3-2 Project Measures to Reduce Operational Emissions</b><br/> Prior to the issuance of the first certificate of occupancy for the relevant portion of the project (i.e., residential or commercial), as appropriate, the Applicant shall provide documentation to the County that the following measures have been achieved. It should be noted that these measures do not apply to on-going uses within the property that are not a component of the Proposed Project, including agricultural operations conducted under third party leases.</p> <p><i>Transportation Demand Management Measures</i><br/> Implement MM 3.13-4 to develop and implement a Transportation Demand Management (TDM) Program to achieve a reduction in vehicle miles traveled (VMT) as a result of the Proposed Project. At a minimum these measures will include:</p> <ul style="list-style-type: none"> <li>▪ Dedicated on-site parking for shared vehicles (vanpools/carpools);</li> <li>▪ Adequate, safe, convenient, and secure on-site bicycle parking and storage in the commercial portion of the project; and</li> <li>▪ Use of an electric fleet for internal transport vehicles (excluding trucks and other ranch vehicles for on-going agricultural and grazing activities) to the extent feasible (no less than 75%), including the golf course.</li> </ul> <p><i>Project Wide Measures</i></p> <ul style="list-style-type: none"> <li>▪ Use energy-efficient lighting that will reduce indirect criteria pollutants and greenhouse gas (GHG) emissions. Using energy-efficient lighting will reduce energy usage and, thus, reduce the indirect GHG emissions from the Proposed Project. Energy-efficient lighting includes adaptive lighting systems or systems that achieve energy savings beyond those required by Title 24 lighting requirements to the maximum extent feasible.</li> <li>▪ Utilize low-flow appliances and fixtures; Use of state-of-the-art irrigation systems that reduce water consumption including graywater systems and rainwater catchment.</li> <li>▪ Use of drought-tolerant and native vegetation.</li> <li>▪ Low volatile organic compound paint shall be utilized for parking areas and the interiors and exteriors of both the residential and non-residential</li> </ul> | <p>Applicant to prepare TDM Program compliant with this Mitigation Measure and submit to County. County to review and approve prior to issuance of the first certificate of occupancy. (Use Permit COA)</p> <p>Lighting plans consistent with these requirements shall be submitted to County prior to approval of building permit. (Use Permit COA)</p> <p>Improvement Plans consistent with these requirements shall be submitted to County prior to approval of Final Maps. (TM COA)</p> | Applicant                    | County                        |



| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Implementation and Timing | Responsible for Implementing | Responsibility for Monitoring |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------------------------------|-------------------------------|
| buildings.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                           |                              |                               |
| <i>Residential Measures</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                           |                              |                               |
| <ul style="list-style-type: none"> <li>Facilitate achievement of zero net energy buildings through installation of solar photovoltaic systems consistent with the 2019 Building Energy Efficiency Standards, CCR Title 24 Part 6. Compliance with this requirement must be demonstrated prior to issuance of occupancy permits for residential uses.</li> <li>Provide electrical outlets on the outside of the homes or outlets within the garages to encourage the use of electrical landscaping equipment.</li> <li>Use water efficient landscapes and native/drought-tolerant vegetation.</li> <li>Install smart meters and programmable thermostats.</li> <li>Use energy-efficient appliances in the residences where available. These include appliances that meet U.S. Environmental Protection Agency (USEPA) Energy Star Criteria.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                     |                           |                              |                               |
| <i>Resort/Commercial Measures</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |                              |                               |
| <ul style="list-style-type: none"> <li>Facilitate achievement of zero net energy buildings through the construction standards required under the 2019 Building Energy Efficiency Standards, CCR Title 24 Part 6 and the use of rooftop or on-site photovoltaic systems, with or without storage, or the acquisition of renewable energy or energy credits from another source, or generation onsite. Zero Net Energy shall mean that on a community-wide basis, the actual annual consumed energy will be less than or equal to the renewable generated energy utilized. It is the Project's goal to obtain enough renewable electrical energy for the Project's needs and to distribute it throughout the Guenoc Valley Site. Therefore, renewable energy supplies shall be secured and/or systems installed for each commercial structure prior to issuance of its final certificate of occupancy.</li> <li>Install on-site charging units for electric vehicles consistent with parking requirements in California Green Building Standards Code Section 5.106.5.2.</li> <li>Install electric water heating instead of gas water heating for some or all of the project's hot water needs, to the extent such technology is readily available and commercially practicable.</li> </ul> |                           |                              |                               |

| Mitigation Measure |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Implementation and Timing                                                                  | Responsible for Implementing | Responsibility for Monitoring |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <b>3.4</b>         | <b>Biological Resources</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                            |                              |                               |
| <b>3.4-1</b>       | <b>Construction Best Management Practices (BMP)</b><br>A) Construction and staging areas shall not be larger than necessary and to the degree feasible shall be within areas otherwise scheduled for development. These areas shall be visibly demarcated prior to construction activities to prevent unnecessary impacts. Equipment shall not be kept outside established areas.<br>B) Construction areas shall be kept serviceably clean. Sufficient closed bins shall be provided for trash and debris. Washout, track out, and dust control BMPs shall be implemented as necessary. Construction vehicles and equipment shall be clean and free of mud or vegetation that could introduce plant pathogens or propagules of non-native plants. This includes equipment hauled onto the site.<br>C) Pets shall not be allowed within construction areas.<br>D) Construction activities shall be carried out such that sensitive habitats are avoided. Materials shall not be placed where they may enter sensitive habitat, receiving waters, or a storm drain, or be subject to wind or runoff erosion and dispersion.<br>E) Equipment use shall be limited to the hours from 7:00 a.m. to 7:00 p.m. to the extent possible. Exceptions may be made if approved by the County for situations where a longer construction schedule would alleviate the potential for adverse environmental effects | The applicant shall include these requirements in construction contracts. (Use Permit COA) | Applicant                    | County                        |
| <b>3.4-2</b>       | <b>Work Environmental Awareness Training</b><br>Construction personnel working on the Proposed Project shall be provided with an Environmental Awareness Training tailored to the location they will be working on prior to the commencement of construction work by that personnel. This training shall include materials that describe the sensitive habitats and special status wildlife species with the potential to occur. Table 3.4-9 in Final EIR, Volume II, Section 3.4 dictates species for which environmental awareness training shall occur, based on location.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | The applicant shall include these requirements in construction contracts. (Use Permit COA) | Applicant                    | County                        |



| Mitigation Measure                                                 |                                                           |                         | Implementation and Timing | Responsible for Implementing | Responsibility for Monitoring |
|--------------------------------------------------------------------|-----------------------------------------------------------|-------------------------|---------------------------|------------------------------|-------------------------------|
| Species                                                            | Guenoc Valley Site (All Phases) and Grange Road Connector | Middletown Housing Site |                           |                              |                               |
| Pallid bat ( <i>Antrozous pallidus</i> )                           | X                                                         | X                       |                           |                              |                               |
| Ring-tailed cat ( <i>Bassariscus astutus</i> )                     | X                                                         |                         |                           |                              |                               |
| Townsend's big-eared bat ( <i>Corynorhinus townsendii</i> )        | X                                                         |                         |                           |                              |                               |
| Western red bat ( <i>Lasiurus blossevillii</i> )                   | X                                                         | X                       |                           |                              |                               |
| American badger ( <i>Taxidea taxus</i> )                           | X                                                         |                         |                           |                              |                               |
| Tricolored blackbird ( <i>Agelaius tricolor</i> )                  | X                                                         |                         |                           |                              |                               |
| Grasshopper sparrow ( <i>Ammodramus savannarum</i> )               | X                                                         |                         |                           |                              |                               |
| Golden eagle ( <i>Aquila chrysaetos</i> )                          | X                                                         |                         |                           |                              |                               |
| Long-eared owl ( <i>Asio otus</i> )                                | x                                                         | X                       |                           |                              |                               |
| Burrowing owl ( <i>Athene cunicularia</i> )                        | X                                                         |                         |                           |                              |                               |
| Northern harrier ( <i>Circus cyaneus</i> )                         | X                                                         |                         |                           |                              |                               |
| Olive-sided flycatcher ( <i>Contopus cooperi</i> )                 | X                                                         | X                       |                           |                              |                               |
| White-tailed kite ( <i>Elanus leucurus</i> )                       | X                                                         | X                       |                           |                              |                               |
| American peregrine falcon ( <i>Falco peregrinus anatum</i> )       | X                                                         |                         |                           |                              |                               |
| Bald eagle ( <i>Haliaeetus leucocephalus</i> )                     | X                                                         |                         |                           |                              |                               |
| Yellow-breasted chat ( <i>Icteria virens</i> )                     | X                                                         | X                       |                           |                              |                               |
| Least bittern ( <i>Ixobrychus exilis</i> )                         | X                                                         |                         |                           |                              |                               |
| Loggerhead shrike ( <i>Lanius ludovicianus</i> )                   | X                                                         | X                       |                           |                              |                               |
| Purple martin ( <i>Progne subis</i> )                              | X                                                         | x                       |                           |                              |                               |
| Yellow warbler ( <i>Setophaga [Dendroica] petechia brewsteri</i> ) | X                                                         | X                       |                           |                              |                               |
| Yellow-headed blackbird ( <i>Xanthocephalus xanthocephalus</i> )   | X                                                         |                         |                           |                              |                               |
| Northwestern pond turtle ( <i>Actinemys marmorata</i> )            | X                                                         | X                       |                           |                              |                               |
| Foothill yellow-legged frog ( <i>Rana boylei</i> )                 | X                                                         | X                       |                           |                              |                               |

Topics covered shall include relevant biological information on these species, and the

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Implementation and Timing                                                                                                                                                                                                                                                                                                                   | Responsible for Implementing | Responsibility for Monitoring |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>appropriate actions that shall be taken in the event of an occurrence. Training shall also include a description of construction best management practices and the importance of environmentally conscious construction. Training materials shall be prepared by a qualified biologist who shall train a member of the contractor's crew to provide follow-up trainings to newly hired employees during the construction period. The qualified biologist shall attend the Environmental Awareness Training quarterly, at a minimum, to ensure that the training sufficiently covers the necessary materials. These materials may be updated as new information is available. Construction personnel shall sign a training log stating that they have received this training. Copies of this training log shall be maintained on the Guenoc Valley Site and shall be made available to inquiring agencies upon request.</p> <p>Construction personnel will also be trained to identify nesting bird behavior that indicates construction activities are causing a significant disturbance to nesting birds. This behavior includes vocalizing, making defensive flights at intruders, getting up from a brooding position, or flying off the nest. Should these behaviors be identified, construction workers will be trained to halt work in the vicinity of the nest until a qualified biologist determines a suitable nest buffer.</p> <p>Should a special-status species be observed by construction personnel, the qualified biologist will verify the observation and report the observation to CNDDDB. The qualified biologist shall also report observations of special-status species identified during preconstruction surveys, if any.</p> |                                                                                                                                                                                                                                                                                                                                             |                              |                               |
| <p><b>3.4-3 General Special-Status Plant Mitigation</b></p> <p>A) Pre-construction botanical surveys of herb-dominated habitats (i.e. grasslands, wetlands) with the potential to support special-status plants shall be conducted within those areas scheduled for groundbreaking during one of the two appropriate identification seasons prior to ground breaking. It should be noted that surveys conducted in 2018 and 2019 for Phase 1 would meet the requirements of this measure for construction activities occurring in 2020 and through a portion of 2021, depending on the exact timeframe of construction and the potential species impacted. Pre-construction surveys of shrub or woodland dominated habitats with the potential to support special-status plants shall be surveyed within one of the four appropriate identification seasons prior to groundbreaking for each specific component of the Proposed Project. Initial vegetation clearing along proposed roadways for fire management shall also be</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <p>The applicant shall perform pre-construction surveys prior to groundbreaking as described in Mitigation Measure 3.4-3, and implement mitigation for identified species within one year of identification and prior to occupancy. The County shall verify implementation of mitigation prior to issuance of certificates of occupancy</p> | <p>Applicant</p>             | <p>County</p>                 |



| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Implementation and Timing | Responsible for Implementing | Responsibility for Monitoring |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------------------------------|-------------------------------|
| subject to these standards. Pre-construction surveys shall be completed by a qualified biologist during the appropriate identification period for plants with the potential to occur in the area scheduled for ground breaking. Results of the pre-construction survey shall be maintained on the Guenoc Valley Site and available to agencies upon request.                                                                                                                                                                                                                                                                                   | (Use Permit COA)          |                              |                               |
| B) In the event that the results of the pre-construction special-status plant surveys identify the presence of individual special-status plants within areas identified for ground disturbance activities, one of the following measures shall be conducted.                                                                                                                                                                                                                                                                                                                                                                                   |                           |                              |                               |
| 1) Individual occurrences of special-status plants shall be avoided by a minimum of 20 feet when possible. This buffer shall be demarcated by a qualified biologist with high-visibility fencing. Where ground disturbance would occur within 100 feet upslope of occurrences of special-status plants during the wet season (October 1 through April 1), silt fencing or straw wattles shall be installed between the work area and the 20-foot setback and shall not be removed until the disturbed areas have been revegetated or otherwise stabilized.                                                                                     |                           |                              |                               |
| OR                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                           |                              |                               |
| 2) When avoidance of a special-status plant is not feasible, mitigation shall occur through transplanting or compensatory planting of in-kind species. Mitigation for special-status plants shall follow the general outline below.                                                                                                                                                                                                                                                                                                                                                                                                            |                           |                              |                               |
| i. For compensatory plantings, in-kind species shall be planted at a minimum ratio of 2:1. Monitoring of mitigation activities shall be performed by a qualified biologist for a minimum of three years. The qualified biologist shall prepare an annual report on the progress of mitigation with recommended management actions. Mitigation shall be deemed complete once the qualified biologist has determined that the mitigation has achieved or exceeded 80 percent success following the minimum three years of monitoring. Additional years of monitoring and management shall occur should mitigation fail to meet success criteria. |                           |                              |                               |
| ii. Should transplanting of individual plants be considered, the transplanting shall be overseen by a qualified biologist. Plants shall                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                           |                              |                               |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Implementation and Timing                                                                                                                                                                                                                                                                                                                                                                              | Responsible for Implementing | Responsibility for Monitoring |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>be relocated to suitable habitats and shall be within designated open space as possible. A quantified biologist shall monitor all transplanted individuals for a minimum of three years to ensure successful establishment. The qualified biologist shall prepare an annual report on the success of transplanted plants. Should transplanting fail, compensatory actions shall occur as outlined under (i).</p> <p>iii. Consultation with CDFW or USFWS shall occur as necessary, based on regulatory jurisdiction, should a special-status plant that does not have a history of successful transplantation and was not previously identified within the Phase 1 Area of Potential Effects be observed during preconstruction botanical surveys. For species with a demonstrated history of successful transplantation, then mitigation shall follow steps (i) and (ii) above.</p> <p>iv. If project activities cannot avoid take of federally or state listed plant species, the applicant shall obtain a California Endangered Species Act (CESA) Incidental Take Permit (ITP) or a Consistency Determination (CD) through CDFW and/or USFWS prior to initiating any work that may result in take of State-listed species.</p>                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                        |                              |                               |
| <p><b>3.4-4 American Badger Impacts</b></p> <p>No more than 14 days before the start of ground disturbance activities on or within 200 feet of open grassland, a qualified biologist shall conduct pre-construction surveys to determine if American badger dens are present. If no dens are observed, no further mitigation is necessary. If American badger dens are determined to be present, the biologist shall monitor for activity to determine whether the den is active. If the den is determined to be occupied by a female with young, a 50-foot buffer shall be demarcated with high-visibility flagging until the qualified biologist has determined that young have matured and dispersed. No construction activities shall occur within the buffer while the den is actively supporting dependent young.</p> <p>If the den is determined to be active, but a female with young is not present, CDFW shall be contacted to determine if burrow exclusion using passive measures such as one-way doors or equivalent may be utilized. Exclusion activities shall be attempted for a minimum of three days to discourage their use prior to any project-related ground disturbance. If the biologist determines that the dens have become inactive as a result of the exclusion methods, dens shall be excavated by hand to prevent</p> | <p>The applicant shall perform pre-construction surveys no more than 14 days before the start of ground disturbance activities on or within 200 feet of open grassland as described in Mitigation Measure 3.4-4, and implement avoidance measures if required as described in Mitigation Measure 3.4-4. The applicant shall include these requirements in construction contracts. (Use Permit COA)</p> | <p>Applicant</p>             | <p>County</p>                 |



| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Implementation and Timing                                                                                                                                                                                                                                                                                                                                                      | Responsible for Implementing | Responsibility for Monitoring |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| them from being re occupied during construction.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                |                              |                               |
| <b>3.4-5 Ringtail Impacts</b><br>No more than 14 days before the start of ground disturbance activities within open grassland, oak woodland, or riparian forest habitat, a qualified biologist shall conduct pre-construction surveys to determine if ringtail dens are present. If no active ringtail dens are observed, no further mitigation shall be recommended. If active ringtail dens are determined to be present within the work area, the biologist shall notify Lake County and develop an avoidance plan using best available scientific practices, in consultation with CDFW, to ensure impacts to the species are avoided prior to the initiation of construction activities. The plan shall include an appropriately sized avoidance buffer based on environmental conditions of the den site and project activities proposed in the vicinity.                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | The applicant shall perform pre-construction surveys as described in Mitigation Measure 3.4-5 no more than 14 days before the start of ground disturbance activities within open grassland, oak woodland, or riparian forest habitat, and implement avoidance measures if required. The applicant shall include these requirements in construction contracts. (Use Permit COA) | Applicant                    | County                        |
| <b>3.4-6 Bat Maternity Roosts and Special-Status Bat Impacts</b><br>A habitat assessment shall be conducted by a qualified biologist for potentially suitable bat habitat within six months of the start of project construction activities. The habitat assessment shall include a visual inspection of suitable habitat features (e.g., trees, bridges, and other structures) for suitable bat roosting habitat within the project area and a minimum of a 500-foot radius adjacent to these areas that may be impacted by Project activities.<br><br>If no potential bat habitat is observed, no further mitigation shall be necessary. If the habitat assessment reveals potentially suitable bat roost habitat, then a qualified bat biologist shall do a presence/absence survey within 30 days of the start of construction. If bats are present, then the qualified biologist shall develop a bat avoidance plan that shall identify: <ol style="list-style-type: none"> <li>1. The location of the roosting sites;</li> <li>2. The number of bats present at the time of assessment (count or estimate);</li> <li>3. The species of bats present;</li> <li>4. The type of roost: maternity, hibernaculum, or a roost;</li> <li>5. Species specific measures to avoid and minimize impacts to bats. The bat</li> </ol> | The applicant shall perform pre-construction habitat assessment and presence/absence surveys as described in Mitigation Measure 3.4-6, and implement avoidance measures as described in Mitigation Measure 3.4-6 if required. The applicant shall include these requirements in construction contracts. (Use Permit COA)                                                       | Applicant                    | County                        |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Implementation and Timing | Responsible for Implementing | Responsibility for Monitoring |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------------------------------|-------------------------------|
| <p>avoidance plan shall evaluate the length of time of disturbance, equipment noise, and type of habitat present at the project.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                           |                              |                               |
| <p>If an occupied bat roost is found and is occupied either during the maternity season (Apr 15 - Aug 31) or during the hibernaculum period (Nov 1 - Feb 28), the qualified bat biologist shall establish a no-disturbance buffer around the roost in consultation with CDFW. The width of the buffer shall be determined by the qualified biologist based on the bat species, site specific conditions, and level of disturbance. The buffer shall be maintained until the qualified bat biologist determines that the roost is no longer occupied or construction near the buffer has been completed.</p> |                           |                              |                               |
| <p>For structures that must be removed that have been identified as containing an active bat roost, exclusion shall occur outside of the maternity or hibernaculum periods described above. The qualified bat biologist shall prepare a plan for the passive exclusion of the bats from the roost, in consultation with CDFW.</p>                                                                                                                                                                                                                                                                           |                           |                              |                               |
| <p>Trees that must be removed that have been identified as potentially suitable bat habitat shall be removed using the two-day phased removal method. On day 1, branches and small limbs not containing potential bat roost habitat (cavities, crevices, exfoliating bark, etc.) shall be removed using chainsaws only. The remainder of the tree shall be removed on day 2.</p>                                                                                                                                                                                                                            |                           |                              |                               |
| <p>Removal shall occur during seasonal periods of bat activity. Removal shall occur as possible outside of maternity season. The maternity roosting season for bats is approximately February 1 through September 1 (but varies due to rainfall and temperature). The best time for removal of structures that may support maternity roosting is between March 1 and April 15.</p>                                                                                                                                                                                                                          |                           |                              |                               |
| <p>If an active maternity roost or hibernaculum is detected, the tree(s) or structures shall be retained until after there is no longer a hibernaculum present, or until after the young bats are no longer dependent on their parents for care as determined by a qualified biologist. If a special-status bat roost is observed during preconstruction surveys, appropriate avoidance or exclusion measures shall be developed in consultation with CDFW as described above.</p>                                                                                                                          |                           |                              |                               |



| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Implementation and Timing                                                                                                                                                                                                                               | Responsible for Implementing | Responsibility for Monitoring |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p><b>3.4-7 Artificial Lighting Impacts</b><br/>Lighting fixtures associated with the construction and operation of the Proposed Project shall be designed to ensure maximum efficiency, eliminate direct upward light, and reduce spill consistent with Design Guidelines and shall follow the general principles below:</p> <ul style="list-style-type: none"> <li>▪ Site-wide lighting shall promote dark sky policies;</li> <li>▪ Lighting along roadways, pathways, and within parking areas shall only be used to the extent necessary to guide nighttime navigation and ensure safety and security;</li> <li>▪ Lighting shall not be placed or illuminate higher than necessary to provide efficient lighting for its intended purpose;</li> <li>▪ Lighting shall be deliberately directed downward and away from sensitive habitat types;</li> <li>▪ Nighttime lighting shall also be reduced to the maximum extent feasible by turning off lights from the hours of 11 p.m. to 7 a.m., unless they are essential for safety or security purposes and are properly designed and installed to reduce light spillage. Lights that must be used during these designated nighttime hours shall be dimmed in order to reduce the intensity of light projected by the Proposed Project as possible and shall be minimized as appropriate through motion-sensitive lighting, lower intensity lights, and appropriately programmed timed lights.</li> </ul> <p>Appropriate lighting consistent with these measures and the Proposed Project's Design Guidelines shall be adhered to for all phases of construction at project-related sites.</p> | <p>Lighting plans consistent with these requirements shall be submitted to County prior to approval of building permits. (Use Permit COA)</p>                                                                                                           | <p>Applicant</p>             | <p>County</p>                 |
| <p><b>3.4-8 Special-Status Birds – Nesting</b><br/><b>General Nesting Bird Survey Requirements:</b> Should any groundbreaking or construction-related work begin within the general nesting season (February 1 through August 31), a pre-construction nesting bird survey on and within 500 feet of ground-disturbing activities shall be completed by a qualified biologist no more than five days prior to the start of work. If no active nests are observed, no further mitigation shall be recommended.</p> <p>If active nests are observed during the pre-construction survey, a qualified biologist shall demarcate a protective, high-visibility buffer around the nest. Buffer size shall be</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <p>Should any groundbreaking or construction-related work begin within the general nesting season (February 1 through August 31), the applicant shall perform a pre- construction nesting bird survey as described in Mitigation Measure 3.4-8, and</p> | <p>Applicant</p>             | <p>County</p>                 |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Implementation and Timing                                                                                                                                                            | Responsible for Implementing | Responsibility for Monitoring |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>determined by the biologist based on species, nest location, planned disturbance footprint, and presence of any visual or auditory buffers. The qualified biologist shall also consider any species-specific plans related to acceptable nest-avoidance measures compared to anticipated disturbance levels of construction. The exclusionary buffer shall remain in place until the chicks have fledged, are feeding independently and are no longer dependent on the nest as determined by a qualified biologist. The qualified biologist shall regularly monitor the nest and shall have stop work authority if construction activities are having an adverse impact on the nest.</p> <p>If a lapse in project-related work of fourteen (14) calendar days or longer occurs, the qualified biologist shall complete another focused survey before Project construction work can be reinitiated.</p> <p>Project Proponent Responsibility: It is the Project proponent's responsibility to comply with Fish and Game Code Sections 3503, 3503.5, and 3513, regardless of the time of year</p> <p><b>Additional Raptor Survey Requirements:</b> Due to the known presence of several nesting raptor species, including eagles, on the overall Guenoc Valley Site primarily outside of the APE, targeted surveys for active raptor nests shall be conducted within 0.5 mile of groundbreaking or construction-related work. The pre- construction surveys shall be conducted in accordance with the most current guidance available from USFWS and CDFW. If a fully protected or otherwise listed bird species is determined to be present on or within 0.5 miles of the work area, consultation with the USFWS and/or CDFW, based on regulatory jurisdiction, shall occur and any measures recommended or required by those agencies shall be incorporated into the project design.</p> <p><b>Additional Tricolored Blackbird Survey Requirements:</b> Prior to initiation of construction in areas containing or adjacent to tricolor blackbird (TRBL) habitat (typically characterized by emergent vegetation) a qualified biologist shall conduct protocol-level surveys within a 0.25-mile radius of project work areas to evaluate the presence of TRBL breeding colonies, suitable nesting and foraging habitat. Surveys shall be conducted during the nesting season (March 15 to July 31). If construction is initiated in the project work area during the nesting season, three (3) surveys shall be conducted within fifteen (15) days prior to the construction activity, with one of the</p> | <p>implement avoidance measures as described in Mitigation Measure 3.4-8 if required. The applicant shall include these requirements in construction contracts. (Use Permit COA)</p> |                              |                               |



| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Implementation and Timing | Responsible for Implementing | Responsibility for Monitoring |                         |            |          |            |            |              |          |          |            |              |          |          |            |                                                                                                                                                                                                                                                                                                                                            |                  |        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------------------------------|-------------------------------|-------------------------|------------|----------|------------|------------|--------------|----------|----------|------------|--------------|----------|----------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|--------|
| <p>surveys within three (3) days prior to the start of the construction. The surveys shall be based on survey methods identified in the Results of the 2017 Tricolored Blackbird Statewide Survey, Appendix 1 (Meese 2017). If breeding colonies are found, the foraging behavior of the colony shall also be documented. Many TRBL breeding colonies expand over time as additional birds are recruited at the edges of established colonies. For this reason, it is important to reassess the extent of a breeding colony before the start of construction activities. If TRBL are found, no work shall begin until CDFW has been consulted with to determine the appropriate avoidance or minimization measures and compliance with CESA can be demonstrated.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                           |                              |                               |                         |            |          |            |            |              |          |          |            |              |          |          |            |                                                                                                                                                                                                                                                                                                                                            |                  |        |
| <p><b>3.4-9 Special-Status Birds – Burrowing Owl</b></p> <p>A pre-construction survey shall be performed by a qualified biologist prior to the start of ground disturbing activities where suitable burrowing owl burrows (such as ground squirrel complexes) are present. The survey shall be performed according to the standards set forth by the Staff Report for Burrowing Owl Mitigation (CDFW, 2012). Pre- construction surveys shall occur no more than 14 days prior to ground disturbance.</p> <p>Should a burrow be observed in use by a burrowing owl, or if a burrow shows signs of use (pellets, whitewash, feathers), no work shall begin until appropriate burrowing owl avoidance or minimization measures have been established by the qualified biologist. The size of the no disturbance buffer shall be consistent with the Staff Report on Burrowing Owl Mitigation shown below:</p> <table data-bbox="203 1040 1062 1166"> <tr> <td><b>Time of Year:</b></td><td><b>Low Disturbance</b></td><td><b>Medium Disturbance</b></td><td><b>High Disturbance</b></td></tr> <tr> <td>4/1 – 8/15</td><td>650 feet</td><td>1,650 feet</td><td>1,650 feet</td></tr> <tr> <td>8/16 – 10/15</td><td>650 feet</td><td>650 feet</td><td>1,650 feet</td></tr> <tr> <td>10/16 – 3/31</td><td>165 feet</td><td>330 feet</td><td>1,650 feet</td></tr> </table> <p>The no disturbance buffer shall be clearly marked with high-visibility flagging, signage, or other methods determined by the qualified biologist.</p> <p>To ensure the buffer is sufficiently sized to avoid take, the qualified biologist shall conduct a minimum of two days of baseline monitoring of burrowing owl behavior prior to the start of project activities and then be onsite to monitor the burrow during the start of project activities. No disturbance buffers shall remain in place until the</p> | <b>Time of Year:</b>      | <b>Low Disturbance</b>       | <b>Medium Disturbance</b>     | <b>High Disturbance</b> | 4/1 – 8/15 | 650 feet | 1,650 feet | 1,650 feet | 8/16 – 10/15 | 650 feet | 650 feet | 1,650 feet | 10/16 – 3/31 | 165 feet | 330 feet | 1,650 feet | <p>The applicant shall perform a pre- construction survey as described in Mitigation Measure 3.4-9 no more than 14 days prior to ground disturbance, and implement avoidance measures as described in Mitigation Measure 3.4-9 if required. The applicant shall include these requirements in construction contracts. (Use Permit COA)</p> | Applicant/County | County |
| <b>Time of Year:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <b>Low Disturbance</b>    | <b>Medium Disturbance</b>    | <b>High Disturbance</b>       |                         |            |          |            |            |              |          |          |            |              |          |          |            |                                                                                                                                                                                                                                                                                                                                            |                  |        |
| 4/1 – 8/15                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 650 feet                  | 1,650 feet                   | 1,650 feet                    |                         |            |          |            |            |              |          |          |            |              |          |          |            |                                                                                                                                                                                                                                                                                                                                            |                  |        |
| 8/16 – 10/15                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 650 feet                  | 650 feet                     | 1,650 feet                    |                         |            |          |            |            |              |          |          |            |              |          |          |            |                                                                                                                                                                                                                                                                                                                                            |                  |        |
| 10/16 – 3/31                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 165 feet                  | 330 feet                     | 1,650 feet                    |                         |            |          |            |            |              |          |          |            |              |          |          |            |                                                                                                                                                                                                                                                                                                                                            |                  |        |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Implementation and Timing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Responsible for Implementing | Responsibility for Monitoring |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>qualified biologist determines the burrow is unoccupied by adults or young (occupation includes individuals or family groups using the burrow or foraging on or near the site following fledging). Should project activities cause burrowing owls to exhibit territorial or agitated behavior (e.g. flushing, vocalizing, making defensive flights at intruders, etc.) then the no disturbance buffer shall be increased such that activities are far enough from the burrow so that the bird(s) no longer display the agitated behavior. Any reductions or modifications to this buffer shall be approved by CDFW prior to its implementation. The buffer reduction request shall include relevant rationale and may propose new measures to further justify the buffer reduction.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                              |                               |
| <p><b>3.4-10 Northwestern Pond Turtle Impacts – Construction</b><br/> To the extent possible, initial ground disturbance, vegetation clearing, and associated project activities within 300 feet of ponds, reservoirs, or wetted streams where northwestern pond turtle has been documented or may potentially occupy, as determined by a USFWS-approved qualified biologist, shall occur between July 1 and October 31 to avoid the peak nesting season and winter inactivity periods for northwestern pond turtle.</p> <p>If work must occur within 300 feet of occupied or potentially occupied aquatic habitat between November 1 and June 31, a qualified biologist will conduct a preconstruction survey and identify areas with potential to support nesting or occupation by overwintering turtles, as applicable, depending on the season. These specific areas will be avoided if feasible. If these areas cannot be avoided, a qualified biologist will conduct a pre-construction survey within 48 hours of the start of construction in these identified areas to survey for turtle nests. Any active nests will be flagged and avoided. If nests cannot be avoided, the USFWS-approved qualified biologist will contact the USFWS to determine next steps. Any measures prescribed by USFWS to avoid take of nesting northwestern pond turtle shall be adhered to.</p> <p>During the active period and outside of peak nesting (July 1 to October 31), a preconstruction survey for northwestern pond turtle shall be completed by a qualified biologist no more than 14 days prior to the start of work within 300 feet of ponds, reservoirs, or wetted streams with the potential to support northwestern pond turtle. If the species is observed, the biologist shall provide measures to avoid direct impacts based on the planned work. Such measures may include a protective no-work buffer,</p> | <p>The applicant shall schedule initial ground disturbance per in Mitigation Measure 3.4-10. If such a schedule is not possible, the applicant shall perform a pre-construction survey as described in Mitigation Measure 3.4-10 for work within 300 feet of ponds, reservoirs, or wetted streams with the potential to support northwestern pond turtle, and implement avoidance measures as described in Mitigation Measure 3.4-10 if required. The applicant shall include these requirements in construction contracts. The applicant shall include all of these requirements in construction contracts. (Use Permit COA)</p> | Applicant/County             | County                        |



| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Implementation and Timing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Responsible for Implementing | Responsibility for Monitoring |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>exclusion fencing, monitoring, or coordination with CDFW and USFWS if relocation is required. These measures shall be implemented in the following manner:</p> <ul style="list-style-type: none"> <li>▪ If a no-work buffer of 300 feet is feasible, it shall be applied and no work shall occur within it.</li> <li>▪ If a no-work buffer of 300 feet is not feasible, work may occur with an on-site biological monitor, or after the installation of an exclusion fence facilitated by the qualified biologist that encircles areas with potential to support pond turtles or otherwise prevents pond turtles from entering the impact area. Exclusionary fence shall be constructed of silt fence no lower than 24 inches in height and the bottom edge will be buried or otherwise secured to the ground to prevent turtles from crossing go under it. A qualified biologist will inspect the exclusion fence after its installation.</li> <li>▪ If a pond turtle would be reasonably expected to incur injury from project work, a qualified biologist may relocate a pond turtle after coordinating with CDFW and USFWS.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                              |                               |
| <p><b>3.4-11 Foothill Yellow-Legged Frog Impacts – Construction</b></p> <p>Work within 100 feet of any wetted stream feature or associated riparian area where foothill yellow-legged frog (FYLF) has been documented shall occur during the dry months (July 1 through October 31) as possible. Timing shall also occur outside of the FYLF breeding season (March 1 to June 30) to the extent possible. If work must occur between October 31 and June 30, a monitor shall be present, or FYLF shall be excluded from active work areas by an exclusionary fence that is at least 24 inches tall and has a no-climb barrier installed along the top. Prior to commencement of work, a qualified biologist will inspect the fence and work area to ensure proper installation and clearance of FYLF.</p> <p>Pre-construction surveys for FYLF within any wetted stream feature near a work area shall be conducted by a qualified biologist within 5 days of the onset of construction activities. Surveys shall cover between left and right bankfull at least 500 feet upstream and 500 feet downstream of the work area for presence of all life stages. Surveys shall extend up to 30 feet above bankfull within 100 feet of work areas when suitable, accessible habitat is present. Surveys shall be conducted during the day and under optimal conditions for detecting FYLF. Additional pre-construction surveys may be required as determined by the qualified biologist. If FYLF are detected, measures to avoid the species shall be implemented. Such measures may include, but are not</p> | <p>The applicant shall schedule work within 100 feet of any wetted stream feature or associated riparian area where foothill yellow-legged frog (FYLF) has been documented per in Mitigation Measure 3.4-11. If such a schedule is not possible, the applicant shall perform a pre- construction survey as described in Mitigation Measure 3.4-11 no more than five days prior to the onset of construction activities, and implement avoidance measures as described in Mitigation Measure 3.4-10 if required. The applicant shall include</p> | Applicant/County             | County                        |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Implementation and Timing                                                                                                                                                                                                                                                                                                                                                                                                             | Responsible for Implementing | Responsibility for Monitoring |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>limited to, a protective no-work buffer, exclusion fencing, monitoring, and/or coordination with CDFW. These measures shall be implemented in the following manner:</p> <ul style="list-style-type: none"> <li>▪ If a work area is within 100 feet of a perennial or intermittent stream with potential to support FYLF and work must occur between November 1 and March 1, a monitor will be present during work and will ensure that no FYLF are harmed by project work. If FYLF are located during preconstruction surveys within 500 feet of a work area that is within 30 feet of a wetted stream between March 1 and July 1, a monitor will be present during work. If FYLF are located within 100 feet of a work area that is located within 30 feet of a stream between July 1 and November 1, a monitor will be present. Any FYLF detected will be avoided by construction activities by at least 50 feet unless the monitor is positioned between the FYLF and the construction activity.</li> <li>▪ Work areas can optionally be enclosed with exclusion fence as described above and no monitoring would be required.</li> <li>▪ If a FYLF is found to be in a work area and cannot be avoided, the qualified biologist will coordinate with CDFW to develop an acceptable relocation strategy.</li> </ul> | <p>these requirements in construction contracts. The applicant shall include all of these requirements in construction contracts. (Use Permit COA)</p>                                                                                                                                                                                                                                                                                |                              |                               |
| <p><b>3.4-12 Invasive Species Management – Operation</b></p> <p>Non-native wildlife shall not be intentionally released onto the Project site, with the exception of approved stocking of fish within isolated waterbodies. In order to address the creation of bullfrog habitat as a result of the Proposed Project, a Bullfrog Management Plan shall be created. The Bullfrog Management Plan shall include the following provisions:</p> <ul style="list-style-type: none"> <li>▪ Goals of the Bullfrog Management Plan;</li> <li>▪ Identification of target areas for bullfrog management;</li> <li>▪ Appropriate management actions designed to remove invasive bullfrogs such that an environmental benefit is achieved;</li> <li>▪ A suitable method of monitoring, adaptive management, and reporting throughout the duration of management.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <p>The applicant shall prepare a Bullfrog Management Plan that meets the requirements of Mitigation Measure 3.4-12 and submit to the County for review prior to issuance of the first grading plans. (Use Permit COA) The applicant shall ensure that implementation of the Bullfrog Management Plan and restrictions on the release of non-wildlife are included in the CC&amp;Rs and is the responsibility of the HOA. (TM COA)</p> | <p>Applicant</p>             | <p>County</p>                 |



| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Implementation and Timing                                                                                                                                                                                                | Responsible for Implementing | Responsibility for Monitoring |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p><b>3.4-13 Aquatic Habitat Public Signage</b><br/>Signage at primary public access locations in proximity to western pond turtle or foothill yellow-legged frog habitat shall be posted that describes the sensitive nature of these habitat types and their importance within the Guenoc Valley Site ecosystem. Signage shall also include action items for visiting public to encourage protection of these valuable resources. This may include, but is not limited to:</p> <ul style="list-style-type: none"> <li>▪ Proper collection and disposal of trash;</li> <li>▪ Leashing of pets to prevent harassment of wildlife;</li> <li>▪ Passive activities to enjoy wildlife without disturbing natural behavior;</li> <li>▪ Discouragement of removal of plants or other biological resources; and</li> <li>▪ Restrictions on allowable transportation (vehicles, bicycles, horses, etc.) near sensitive habitat.</li> </ul> <p>Infrastructure shall also include waste receptacles sufficient in number and size to service public use of the Guenoc Valley Site with regular service to prevent over spilling. Removal of litter shall occur during servicing of waste receptacles.</p>                                                                                                                              | <p>Signage shall be installed prior to issuance of the first occupancy permit. (Use Permit COA) Maintenance of signage shall be the responsibility of the HOA, and this shall be included in the CC&amp;Rs. (TM COA)</p> | <p>Applicant</p>             | <p>County</p>                 |
| <p><b>3.4-14 Future Phases Biological Review</b><br/>Following the development of sufficient information related to future phases of development and prior to any on the ground impacts, a qualified biologist shall perform an updated and detailed analysis on impacts to biological resources within the future phases Area of Potential Effect. A report detailing any necessary survey methods, results, and analysis of potential future phases impacts shall be prepared to determine the application of Mitigation Measures 3.4-1 through 3.4 13, 3.4-15 through 3.4-21, 3.9- 1, 3.9-2, and 3.10-2 to future phases, and the need for additional mitigation measures beyond those measures to reduce impacts of future phases to a less than significant level. The analysis shall be to the level of detail presented within this EIR. Additional mitigation shall be presented for those impacts determined to be significant or potentially significant following the inclusion of Mitigation Measures 3.4-1 through 3.4 13, 3.4-15 through 3.4-21, 3.9-1, 3.9-2, and 3.10-2. Additional mitigation shall be designed such that impacts to biological resources are reduced to less-than-significant levels and include avoidance, compensation, and monitoring similar to mitigation identified for Phase 1.</p> | <p>Applicant shall include in application for SPD for future phases. County will ensure that this mitigation is implemented prior to approval of SPDs for future phases.</p>                                             | <p>Applicant/County</p>      | <p>County</p>                 |
| <p><b>3.4-15 Impact to Sensitive Habitats</b><br/>Sensitive habitats shall be avoided to the maximum extent feasible. In areas where full avoidance of sensitive habitat types is not possible, mitigation shall occur as</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <p>The applicant shall ensure that sensitive habitats are avoided as described in</p>                                                                                                                                    | <p>Applicant/County</p>      | <p>County</p>                 |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Implementation and Timing                                                                                                                                                                                                                                                 | Responsible for Implementing | Responsibility for Monitoring |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>described below. This mitigation shall be applicable to impacts for purple needlegrass, musk- brush chaparral, white alder grove, Brewer willow thicket, Sargent cypress forest, serpentine rock outcrops, and native grasslands:</p> <ul style="list-style-type: none"> <li>▪ Preservation of in-kind habitat shall occur at a minimum ratio of 2 acre:1 acre.</li> <li>▪ Areas designated for preservation shall be maximized within identified protection areas, such as sensitive habitats within Habitat Connectivity Easement Areas. Sensitive habitats within the Open Space Combining District that are not required to mitigate for impacts to POU resulting from vineyard development approved in the 2009 FEIR may be used for the purpose of this mitigation.</li> <li>▪ Preservation of in-kind habitat that occurs within residential lots shall occur only within open space prohibited from development (including landscaping and agricultural uses) by the Design Guidelines, or through the establishment of habitat easements within the residential lots. Preservation of sensitive habitat for the purposes of mitigation that occurs within deed-restricted open space shall be identified within the deed restriction and shall prohibit the development of that area identified for preservation. Preservation within deed-restrictions shall be preserved in perpetuity as a condition of the deed.</li> <li>▪ Areas that are preserved for in-kind habitat that occur outside of residential lots, Habitat Connectivity Easement Areas, and the Open Space Combining District shall be avoided during future phases of development. Should unavoidable impacts to in-kind habitat preservation areas occur during future phases of construction, those impacts shall be subject to additional compensatory actions set forth in this mitigation. Should insufficient habitat occur to offset future impacts, a compensatory habitat restoration, enhancement, and/or creation mitigation measure shall be prepared and approved by the County prior to on the ground impacts of future development phases.</li> <li>▪ Those areas selected for preservation shall be provided on a map to the County and approved by the County.</li> </ul> <p>Preservation of in-kind habitat shall be the preferred method of mitigation when possible. The Applicant may additionally satisfy the 2:1 mitigation ratio through restoration, creation, and/ or enhancement of in-kind habitat. “In-kind” requires that habitats meet the classification criteria of their respective vegetative community as defined during the appropriate biological surveys. Mitigation performed through restoration, creation, or enhancement shall be performed under the supervision of a</p> | <p>Mitigation Measure 3.4-15, and where avoidance is not feasible, implement mitigation described in Mitigation Measure 3.4-15. (Use Permit and TM COAs) The County shall review and approve mitigations prior to on-the-ground impacts of future development phases.</p> |                              |                               |



| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Implementation and Timing                                                                                  | Responsible for Implementing | Responsibility for Monitoring |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>qualified biologist and monitored for a minimum of five years by a qualified biologist.</p> <p>The biologist shall prepare an annual report on the status of mitigation activities along with adaptive management recommendations as necessary. These reports shall be maintained by the Applicant and available to agencies upon request. Success criteria shall be as follows and shall require additional years of monitoring and management should mitigation fail to meet success criteria:</p> <ul style="list-style-type: none"> <li>▪ Purple needlegrass and native grasslands shall achieve a percent native plant cover that meets or exceeds that of the habitat impacted. Non-sensitive grasslands and herb-dominated habitat types are suitable for restoration and creation activities.</li> <li>▪ Musk-brush chaparral shall be restored in non-sensitive suitable habitat. Mitigation shall occur at a 2:1 acre ratio and shall achieve a 75 percent acreage establishment. The monitoring biologist shall consider percent cover, species composition, overall health of plantings, and other indicators when determining success of establishment.</li> <li>▪ White alder grove and Brewer willow thicket may be restored along riparian corridors where invasive species or bank stabilization issues have occurred. Mitigation shall occur at a 2:1 acre ratio and shall achieve a 75 percent acreage enhancement. The monitoring biologist shall consider percent cover, species composition, bank stability, overall health of plantings, and other indicators when determining success of establishment.</li> <li>▪ Sargent cypress forest shall be enhanced through the removal of competing foothill pines at an acreage ratio of 2:1 once annually for a total of five years and/or Sargent cypress trees shall be replanted at a 2:1 ratio and monitored for a total of five years. Replanting shall achieve a 75 percent success rate.</li> <li>▪ Serpentine rock outcrop shall be enhanced through the removal of invasive species at an acreage ratio of 2:1 in similar habitat that has a dominant invasive species relative cover to achieve a percent native plant cover that meet or exceeds that of the habitat impacted.</li> </ul> |                                                                                                            |                              |                               |
| <p><b>3.4-16 Oak Mitigation Plan</b></p> <p>All project activities shall be subject to compliance with the Oak Mitigation Plan, dated March 2024, included as Appendix J to the Draft PREIR. Prior to approval of final maps, the Applicant shall demonstrate compliance with the Oak Mitigation Plan</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <p>Prior to approval of final maps, the Applicant shall demonstrate compliance with the Oak Mitigation</p> | <p>Applicant</p>             | <p>County</p>                 |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Implementation and Timing                                                                                                                                                                                                                                                                                                                                                  | Responsible for Implementing | Responsibility for Monitoring |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>related to impacts to oaks and oak woodland canopy. Prior to issuance of grading and building permits, the Applicant or applicants for grading and building permits shall demonstrate compliance with the Oak Mitigation Plan related to impacts to oaks, mitigation compliance, building envelope and deed restrictions. The Oak Mitigation Plan for this project addresses impacts to oaks as a result of the Proposed Project. The Oak Mitigation Plan was prepared in accordance with the Lake County General Plan. The Oak Mitigation Plan includes the following:</p> <ul style="list-style-type: none"> <li>▪ Goals of the mitigation plan;</li> <li>▪ Method of impact identification appropriate for all phases of construction;</li> <li>▪ Discussion on compliance with the Lake County General Plan and 2008 Oak Tree Replacement Plan per the 2009 FEIR;</li> <li>▪ Proposed compensatory action suitable to meet mitigation goals;</li> <li>▪ Compensatory planting ratios of 2:1 for smaller trees and 5:1 for larger trees;</li> <li>▪ Success criteria for mitigation such that compensatory plantings for impacts to individual trees achieve a minimum of 80 percent success rate;</li> <li>▪ Preservation for impacts to valley oak woodland, when applied, shall be no less than 3:1 of in-kind habitat type acreage, and 2:1 for all other types of oak woodland;</li> <li>▪ A requirement of at least 7 years of monitoring, adaptive management, and reporting throughout the mitigation process; and</li> <li>▪ Limitation of the total impact to oak woodlands to 1 acre on residential lots consistent with the design guidelines.</li> </ul> <p>The Oak Mitigation Plan shall be subject to Lake County review and approval prior to ground disturbance.</p> <p>Oaks present on the Middletown Housing Site shall be avoided. If full avoidance of oaks is not feasible, the measures in the Oak Mitigation Plan prepared for the Guenoc Valley Site shall apply. Replanting for oaks removed on the Middletown Housing Site may occur on the Middletown Housing Site or the Guenoc Valley Site.</p> | <p>Plan related to impacts to oaks and oak woodland canopy. (TM COA) Prior to issuance of grading and building permits, the Applicant or applicants for grading and building permits shall demonstrate compliance with the Oak Mitigation Plan related to impacts to individual oaks, mitigation compliance, building envelope and deed restrictions. (Use Permit COA)</p> |                              |                               |
| <p><b>3.4-17 Aquatic Resources Protection and Management</b><br/>Consistent with governing regulations and policies, the following setbacks shall be incorporated into the project design:</p> <ul style="list-style-type: none"> <li>▪ 30 feet from the top of bank of perennial streams;</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <p>Setbacks are incorporated into the Design Guidelines and shall be administered by the HOA. The County will review compliance prior to</p>                                                                                                                                                                                                                               | <p>Applicant</p>             | <p>County</p>                 |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Implementation and Timing                                                                                                                                                                                     | Responsible for Implementing | Responsibility for Monitoring |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <ul style="list-style-type: none"> <li>20 feet from the top of bank of any intermittent stream;</li> <li>20 feet from the edge of any adjacent wetlands or the ordinary high water mark of ephemeral streams or other bodies of water (including reservoirs and lakes); or</li> <li>To the outer extent of a riparian corridor.</li> </ul> <p>No setback is required or recommended for man-made stormwater or irrigation ditches.</p> <p>Should additional analysis of these features performed by a qualified biologist that determines larger setbacks are needed to ensure full protection of habitat based on factors such as slope, setbacks up to fifty feet may be required as possible and dictated by the conditions observed and analyzed.</p> <p>The setback distances identified above shall be delineated by a qualified biologist with high-visibility fencing or flagging prior to any construction activities occurring within 200 feet of the aquatic habitat features. No construction work or equipment staging shall occur within the setbacks unless a variance or permit is authorized to allow it. Prior to impacts, consultation shall occur with USACE and the RWQCB to determine the extent of federal and state jurisdictional wetlands and waters. A CWA Section 404 permit shall be obtained from USACE for impacts to any identified wetlands and waters subject to CWA jurisdiction, along with RWQCB state water quality certification for such permit under CWA Section 401, as necessary. An LSAA with CDFW shall be entered for those impacts to any identified streams subject to Fish and Game Code Section 1600 jurisdiction. Any necessary permits and approvals shall be obtained prior to the respective impacts for which they are required, and conditions of permits and approvals acquired for the Proposed Project shall be met. Mitigation shall occur consistent with the necessary permits and approval conditions required for the Proposed Project.</p> <p>Mitigation for direct impacts to aquatic habitats shall occur through a combination of habitat preservation, creation, or restoration/enhancement and shall, at a minimum, include the following:</p> <ul style="list-style-type: none"> <li>Should mitigation for aquatic resources occur through preservation, preservation shall occur at a minimum ratio of 2:1. Areas designated for preservation shall be maximized within the Open Space Combining District or within Habitat</li> </ul> | <p>issuance of building permits. Flagging shall be installed as described in Mitigation Measure 3.4-17. The applicant shall include all of these requirements in construction contracts. (Use Permit COA)</p> |                              |                               |



| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Implementation and Timing | Responsible for Implementing | Responsibility for Monitoring |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------------------------------|-------------------------------|
| <p>Connectivity Easement Areas, and may only occur within residential lots if preservation in perpetuity as a condition of the deed-restricted open space for the lot. Those areas selected for preservation shall be approved by the County and be subject to the compensatory actions set forth in this mitigation and necessary permit or approval conditions should future impacts to preserved habitats be identified.</p> <ul style="list-style-type: none"> <li>▪ When mitigation occurs through the restoration or enhancement of habitat, mitigation shall occur at a minimum ratio of 2:1. Restoration and/or enhancement of habitat shall occur within the Open Space Combining District or within Habitat Connectivity Easement Areas as possible. Monitoring of mitigation activities shall be performed by a qualified biologist for a minimum of three years consistent with the terms of necessary permits. The qualified biologist shall prepare an annual report on the progress of mitigation with recommended management actions. Mitigation shall be deemed complete once the qualified biologist has determined that the success of restoration or habitat enhancement activities meets or exceeds 80 percent (measured either in acres or linear feet). Enhancement and restoration activities may include, but are not limited to, planting of native riparian or wetland vegetation, stabilization of banks, creating a natural channel along areas of manmade drainages, addition of habitat enhancement features that provide refugia or other important features for wildlife that may utilize the habitat, or removal of non-native vegetation.</li> <li>▪ When mitigation occurs through the creation of habitat, creation shall occur at a minimum ratio of 1:1. A qualified biologist shall monitor habitat creation activities on an annual basis for a minimum of five years, and shall provide an annual report of these monitoring activities along with recommendations in order to ensure success of habitat creation. Following completion of habitat creation activities, a qualified biologist shall prepare an annual report on the progress of mitigation with recommended management actions. Mitigation shall not be deemed complete until the full 1:1 creation ratio has been met.</li> <li>▪ In cases of conflict between permit terms and measures presented herein, those permit terms and conditions shall supersede those presented within this EIR. Alternative forms of mitigation not detailed above may serve to satisfy mitigating requirements to jurisdictional wetlands and waters as dictated by the appropriate permit(s). Alternative forms of mitigation include purchase of habitat credits from an approved mitigation bank at a ratio not less than 2:1, or payment of in-lieu fees as set by the appropriate agency.</li> </ul> |                           |                              |                               |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Implementation and Timing                                                                                                                                                                                                                                                                                                                                                                            | Responsible for Implementing | Responsibility for Monitoring |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p><b>3.4-18 Sensitive Habitat Impacts from Wildfire Clearing</b></p> <p>Sensitive habitats included below shall be avoided during removal of dead vegetation and fire fuel load reduction necessary for safety purposes in managing wildfire risk to the degree feasible. The following sensitive habitats shall be addressed in the following manner as it relates to fire management fire breaks, lop and scatter, and masticating outside of development areas:</p> <ul style="list-style-type: none"> <li>▪ Purple needlegrass grasslands – This habitat does not require wildfire risk fuel reduction activities. This habitat shall be avoided to the degree feasible. Equipment and vehicles shall not be used or staged within this habitat type.</li> <li>▪ Musk brush chaparral – This habitat does not require wildfire risk fuel reduction activities. This habitat shall be avoided to the degree feasible. Equipment and vehicles shall not be used or staged within this habitat type.</li> <li>▪ White alder grove – Due to limited distribution and association with natural riparian fire breaks, this habitat type should not require ongoing wildfire risk fuel reduction activities and shall be avoided as possible. Equipment and vehicles shall not be used or staged within this habitat type. If determined necessary by safety personnel, hand-clearing of dead vegetation may occur.</li> <li>▪ Brewer willow thicket - Due to the limited distribution and association with natural riparian fire breaks, this habitat type does not require wildfire risk fuel reduction activities. This habitat shall be avoided to the degree feasible. Equipment and vehicles shall not be used or staged within this habitat type.</li> <li>▪ Sargent cypress forest – This habitat may require occasional management for wildfire risk. Due to the sensitive nature of this habitat type, hand tools shall be the only acceptable use of vegetation management. No live Sargent cypress trees shall be felled. Equipment and vehicles shall not be used or staged within this habitat type.</li> <li>▪ Serpentine rock outcrop - Due to the limited distribution and low vegetation cover, this habitat type does not require wildfire risk fuel reduction activities. This habitat shall be avoided to the degree feasible. Equipment and vehicles shall not be used or staged within this habitat type.</li> <li>▪ Oak woodland - This habitat may require occasional management for wildfire risk. Due to the sensitive nature of this habitat type, hand tools or grazing shall be the only acceptable use of vegetation management. Should impacts to any living oak trees occur, they shall be mitigated for as outlined within the Oak Mitigation Plan. Equipment and vehicles shall not be used or staged</li> </ul> | <p>The applicant shall ensure compliance with Mitigation Measure 3.4-18. Applicant to incorporate these measures into the Wildfire Prevention Plan and obtain County approval of revised Wildfire Prevention Plan prior to approval of Grading or Improvement Plans- (whichever occurs first). The applicant shall include all of these requirements in construction contracts. (Use Permit COA)</p> | <p>Applicant/County</p>      | <p>County</p>                 |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Implementation and Timing                                                                                                                                                                                                                                                                | Responsible for Implementing | Responsibility for Monitoring |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>within this habitat type.</p> <ul style="list-style-type: none"> <li>▪ Oak savanna – Cover for this habitat type is dominated by non-native annual grasses and would not likely require management for wildfire risk except limited grazing or mowing immediately adjacent to high-risk fire areas such as within 50 feet of roads. Equipment use and staging may occur within areas of non- native annual grassland provided that the driplines of oaks are not impacted. Should impacts to any living oak trees occur, mitigation shall occur as outlined within the Oak Mitigation Plan.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                                                          |                              |                               |
| <p><b>3.4-19 Wildlife Movement – Fencing</b></p> <p>Use of fencing shall be minimized throughout the Guenoc Valley Site and shall adhere to those restrictions set forth in the Design Guidelines for all phases of development. Fencing shall not be installed for the purpose of wildlife exclusion except in the case of safety or protection of agricultural resources or residential development areas, and shall be designed to allow for continued movement of non-target species as possible. Unless approved by the Home Owner’s Association or for ongoing protection of agricultural resources or property, fencing exceeding six feet in height shall not be used. Fencing materials designed for the purpose of wildlife entrapment or injury shall not be used.</p> <p>Full perimeter fencing for residential lots exceeding two acres in size shall be prohibited unless consistent with the following wildlife-friendly fencing measures:</p> <ul style="list-style-type: none"> <li>▪ Fencing shall be reasonably visible to travelling wildlife to prevent collision with fencing,</li> <li>▪ Fencing shall not include low rails or wires that would prevent smaller dispersing animals from passing,</li> <li>▪ Fencing shall not present a top rail clearance exceeding six feet, and shall not exceed four feet when possible. Clearance height shall consider the ground slope approaching the fence such that the height of a jump required to clear the fence from the downslope side does not exceed six feet, and</li> <li>▪ Materials that entangle or otherwise entrap wildlife, such as loose wire, top or bottom barbed wires, shall be prohibited.</li> </ul> | <p>Fencing requirements are incorporated into the Design Guidelines and shall be administered by the HOA. The County will review compliance prior to issuance of building permits. The applicant shall include all of these requirements in construction contracts. (Use Permit COA)</p> |                              |                               |
| <p><b>3.4-20 Wildlife Movement – Future Phases</b></p> <p>Future phases of development shall retain the clustered development design and restriction on maximum allowable residential lot development standards set forth within the Design Guidelines. Residential lots shall be restricted to an allowable</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | <p>Applicant shall include in application for SPD for future phases. County will ensure that this mitigation</p>                                                                                                                                                                         | <p>Applicant/County</p>      | <p>County</p>                 |



| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Implementation and Timing                                                                                                                                                                       | Responsible for Implementing | Responsibility for Monitoring |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| development area of 1.5 acres unless further restricted by the Design Guidelines, for example, in areas of oak woodlands. Development of future phases shall avoid riparian corridors that commonly serve as wildlife passageways with development setbacks to the degree feasible, as identified in Mitigation Measure 3.4-17. Setbacks and sensitive habitat avoidance shall also be maximized. Prior to implementation of future phases, additional analysis on the overall impacts to wildlife movement of proposed future phases development shall be performed by a qualified biologist to the level of detail presented within this EIR, and determine the extent to which implementation of Mitigation Measure 3.4-19 will reduce the impacts of proposed future phases development on wildlife movement. Should implementation of Mitigation Measure 3.4-19 not reduce the impacts of proposed future phases development on wildlife movement to a less than significant level, additional mitigation shall be determined by a qualified biologist such that impacts to wildlife movement are reduced to less-than-significant levels. Such mitigation may include use of Habitat Corridor Easements or other forms of designating open space. | is implemented prior to approval of SPDs for future phases.                                                                                                                                     |                              |                               |
| <b>3.4-21 Domestic Cat Predation</b><br>The Home Owner's Association shall distribute to new residents informational resources on domestic cat predation on wildlife and methods to prevent such predation. These recommendations may include, but are not limited to: <ul style="list-style-type: none"> <li>▪ Encouraging cat owners to keep cats indoor as possible;</li> <li>▪ Encouraging all residents to remove domestic cat attractants such as outdoor food bowls and uncovered trash;</li> <li>▪ Affixing bells to collars;</li> <li>▪ Having cats spayed or neutered to prevent establishment of feral colonies; and</li> <li>▪ Ensuring backyard bird feeders are not accessible to cats.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | HOA shall prepare educational materials to provide to future homeowners prior to occupancy. Ongoing implementation of this mitigation shall be handled by the HOA.                              | Applicant                    | County                        |
| <b>3.5 Cultural Resources</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                 |                              |                               |
| <b>3.5-1 Avoid Historical and Archaeological Resources, Apply Appropriate Mitigation</b><br><i>Phase 1 and Future Phase General Provisions</i><br>All of the identified cultural resource sites shall be avoided during project construction, development, and operation activities. A shapefile database shall be transmitted to the Applicant and included in the final contract with the construction contractor to ensure that cultural resource locations are avoided. Allowable building envelopes shall be identified in the subdivision maps to ensure avoidance of cultural resource sites, and any residential properties that include cultural resources shall be                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | The applicant shall implement surveys, avoidance and monitoring as described in Mitigation Measure 3.5-1. The applicant shall include all of these requirements in construction contracts. (Use | Applicant                    | County                        |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Implementation and Timing                                                                                                                        | Responsible for Implementing | Responsibility for Monitoring |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>deed restricted to avoid construction on or immediately adjacent to the resource. This shall be accomplished by establishing a buffer of 50 feet around the perimeter of the site and erecting a semi-permanent fence that will remain in place throughout construction. The fence shall be installed with a qualified archaeologist and tribal monitor in attendance, and shall determine the established buffer for the location. The buffer can be reduced or modified to accommodate sensitive environmental conditions, based on the assessment of the qualified archaeologist and tribal monitor or cultural advisor (see Mitigation Measure TCR-2).</p> <p>If construction will encroach closer than 50 feet, a qualified archaeological and tribal monitor shall be retained to monitor those activities. Should cultural resources be uncovered within the buffer, all construction in the in the immediate area shall halt until the find can be assessed for NRHP/CRHR eligibility in accordance with current professional standards using minimization measures and the provisions of the Unanticipated Discoveries Plan developed in compliance with Mitigation Measure TCR-2.</p> <p><i>Phase 1 Site-Specific Avoidance Strategies</i></p> <p>Site P-17-425 shall be incorporated into proposed buffer zones for wetlands or oak woodlands. Should ground-disturbing work be required within 50 feet of the site, a qualified professional archaeologist shall be retained to monitor construction activities. If site elements are discovered during monitoring, then the archeologist shall design an appropriate mitigation plan in consultation with Middletown Rancheria.</p> <p>The sites designated as lithic scatters (P-17-399, 400, 401, -404, -1363, -1470, -1957, -1958, -1959, -1960, -1961, -1962, -1963, and -2027, the Back of House vineyard lithic scatter site, the Hilltop Site, the Creek Overlook Site, and the Sunshine Midden Site) have not been evaluated for the NRHP or CRHR. They shall be avoided and/or incorporated into open space or wetland or vegetation buffers wherever possible. If ground-disturbing work is required within 50 feet of any of these sites, they shall be examined under the CARIDAP unless different and/or additional mitigation measures are identified through consultation with the Middletown Rancheria (Tribe). Analyses shall be competed in the field to the extent possible.</p> <p>Four other sites (P-17-417, -2035, -2038, and -2041) include lithic scatters and</p> | <p>Permit COA) The applicant will delineate areas as described in Mitigation Measure 3.5-1 for deed restrictions on all final maps. (TM COA)</p> |                              |                               |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Implementation and Timing | Responsible for Implementing | Responsibility for Monitoring |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------------------------------|-------------------------------|
| <p>bedrock mortars; these sites cannot be evaluated under the CARIDAP protocol. These sites should similarly be incorporated into open space or other natural resource buffers where feasible. Should construction impacts be unavoidable, each affected site shall be investigated by a qualified archaeologist in collaboration with the Tribe accordance with current professional standards in order to assess eligibility to the NRHP or CRHR unless different and/or additional mitigation measures are identified through consultation with the Tribe. For resources that cannot be avoided, site-specific minimization and mitigation measures will be developed in consultation between the archaeologist and Tribal monitor.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                           |                              |                               |
| <p>Occupation sites have an elevated potential to contain data and other values which would make them eligible for listing on the NRHP or CRHR. These sites (P-17-116, -256, -405, -411, -414, -416, -420, -421, and -2039), therefore, shall be accorded an extra degree of protection. Each of these sites shall be avoided, incorporated into open space or wetland or vegetation buffers wherever possible. The sites are presumed eligible for listing on the NRHP/CRHR and therefore shall be protected by semi- permanent construction fencing, to be maintained until construction in the vicinity has finished. Should avoidance be infeasible, these sites shall be subject to intensive Phase II evaluation in accordance with an individual Treatment Plan designed for each specific site subject to consultation with Middletown Rancheria. The primary method of mitigation will be through minimization and avoidance measures. Only in cases where minimization or avoidance is infeasible, or there are no other means of mitigation, may a program of archaeological Data Recovery be implemented in accordance with current professional standards. Construction in the vicinity of the site shall not resume until minimization measures or Data Recovery has been completed.</p> |                           |                              |                               |
| <p>Historic sites within Phase 1 impact areas, including P-17-406, -412, -1996, -2042, -2043, -2952, -2956, the Bohn Hill debris scatter, and the Ink Ranch corrals, shall be incorporated into open space or wetland or vegetation buffers wherever possible and avoided with a 15-foot fenced buffer; the fence shall remain in place until all ground-disturbing work within 50 feet of the resource has been completed. Should construction impacts to historic sites be unavoidable, the individual site shall be visited, compared to existing resource records, re-documented through resource update forms, and evaluated for the NRHP/CRHR. If eligible, appropriate treatment methods shall be included in a Treatment Plan designed in consultation with the</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                           |                              |                               |



| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Implementation and Timing                                                                                                                                                                                     | Responsible for Implementing | Responsibility for Monitoring |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| Tribe, which shall be implemented prior to site disturbance.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                                                                                                                                                               |                              |                               |
| <p>The Back of House vineyard site is located within an active vineyard and consequently has been disturbed; further disturbance will occur when the vineyard is removed prior to Back of House construction. This site has not been evaluated for NRHP/CRHR eligibility and will be more fully disturbed during construction of the Proposed Project. A CARIDAP testing and evaluation program shall be implemented prior to any new ground-disturbing activities at this location unless different and/or additional mitigation measures are identified through consultation with the Tribe. If the site is found or presumed eligible for listing on the NRHP/CRHR, a qualified professional archaeologist shall design an appropriate Treatment Plan in consultation with Middletown Rancheria; the Treatment Plan shall include the number and size of excavation units to be completed, laboratory or in-field analyses to be performed, documentation of results, and criteria to make a final recommendation to the NRHP/CRHR, all in accordance with Mitigation Measure 3.5-1. Construction activities in the vicinity of the site shall not resume until mitigation has been completed.</p> <p>Sites that may occur within Phase 1 development areas but which could not be relocated include: P-17-404, and -409. Accordingly, all ground disturbance proposed in areas where these sites have been previously plotted shall be monitored by a qualified archaeologist and Tribal monitor. In the event that site indicators are encountered, project-related activities shall cease and shall not resume within 50 feet of the find and the site shall be evaluated for NRHP/CRHR eligibility in accordance with the provisions of the Unanticipated Discoveries Plan unless different and/or additional mitigation measures are identified through consultation with the Tribe.</p> |                                                                                                                                                                                                               |                              |                               |
| <p><b>3.5-2 Worker Awareness Training, Construction Monitoring, and Halt Work</b></p> <p>1) <b>Worker Awareness and Sensitivity Training:</b> Prior to the beginning of grading (including ground-clearing) or any construction (including structure relocation), a qualified professional archaeologist shall administer a cultural resources awareness and sensitivity training program to all construction workers who will be performing grading or construction work. Either a tribal representative should assist with administering the training, or the training materials should be approved by the Tribal Cultural Advisor. The program shall include a review of the types of finds that could occur, regulatory requirements, and a list of contacts (with telephone numbers) in case of accidental discoveries. The training program shall be repeated periodically as new construction workers are added to the</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <p>The applicant shall implement monitoring and other actions as described in Mitigation Measure 3.5-2. The applicant shall include all of these requirements in construction contracts. (Use Permit COA)</p> | Applicant                    | County                        |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Implementation and Timing | Responsible for Implementing | Responsibility for Monitoring |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------------------------------|-------------------------------|
| <p>project.</p> <p>2) <b>Construction Monitoring:</b> The Applicant shall retain a team of professional archaeologists and tribal monitors to implement a monitoring program to observe initial ground disturbing activities from the surface to sub-soil (including testing, concrete pilings, debris removal, rescrapes, punchlists, pot-holing or auguring, boring, grading, trenching, foundation work and other excavations or other ground disturbance involving the moving of dirt or rocks with heavy equipment or hand tools within the Project area), ensure that buffer areas are marked, and halt construction in the case of new discoveries. The tribal monitoring shall be supervised by the project Tribal Cultural Advisor. The duration and timing of the archaeological monitoring activities shall be determined by the lead archaeologist in consultation with the Tribal Cultural Advisor. The duration and timing of tribal monitoring will be determined by a cultural resources monitoring agreement between the parties. The Tribal Cultural Advisor will coordinate with the construction field supervisor to confirm where ground disturbing activities will occur and determine the location its tribal monitor would survey, monitor, spot-check or remain stationary. Where feasible, the archaeological and tribal monitors will work together at the same locations. If the Tribal Cultural Advisor determines that full-time monitoring is no longer warranted, he or she may recommend that tribal monitoring be reduced to periodic spot-checking or cease entirely. Tribal monitoring would be reinstated in the event of any new or unforeseen ground disturbances.</p> <p>Depending on the scope and schedule of ground disturbance activities of the Project (e.g., discoveries of cultural resources or simultaneous activities in multiple locations that requires multiple tribal monitors, etc.) additional tribal monitors may be required on-site. If additional tribal monitors are needed, the Tribe shall be provided with a minimum of three (3) business days advance notice unless otherwise agreed upon between the Tribe and applicant. The on-site tribal monitoring shall end when the ground disturbance activities are completed, or when the project Tribal Cultural Advisor has indicated that the site has a low potential for tribal cultural resources.</p> <p>3) <b>Halt Work:</b> Should any archaeological, paleontological, or cultural materials be discovered during site development, all activity shall be halted within 100 feet of</p> |                           |                              |                               |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Implementation and Timing                                                                                                                                                                         | Responsible for Implementing | Responsibility for Monitoring |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>the find(s). A professional archaeologist certified by the Registry of Professional Archeologists (RPA) shall be notified and shall evaluate the find(s) and recommend mitigation procedures, if necessary. The findings and mitigation measures shall be reviewed and approved by the Lake County Community Development Director prior to commencing work.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                   |                              |                               |
| <p><b>3.5-3 Future Phase Investigations</b><br/> Because Future Phases of work will affect areas not yet included in an archaeological study, prior to undertaking construction in any Future Phase area, the Applicant shall retain a qualified professional archaeologist to complete a cultural resources study in coordination with Middletown Rancheria. The study shall determine whether any previous archaeological studies or cultural resources have been identified within the Future Phase development area. If no studies have been completed, or if previous study results are more than 15 years old, new studies shall be prepared including the results of background research, field surveys, identification and evaluation of resources, documentation of results, and submission of the report to Lake County and the NWIC upon completion. New surveys shall include both professional archaeologists and the Tribal Cultural Advisor (or his/her designee). These efforts shall be completed prior to ground-disturbing activities. If significant historic-era resources or significant archaeological sites are present, the development proposal shall designate the area surrounding the site as open space and the site shall be completely avoided. If avoidance is not feasible, a qualified professional archeologist shall be retained to evaluate NRHP/CRHR eligibility of the site, and, if eligible, shall design an appropriate Treatment Plan in consultation with Middletown Rancheria. The minimization measures outlined in the Unanticipated Discoveries Plan described under Mitigation Measure TCR-2 shall be adhered to as feasible. Construction activities in the vicinity of the site shall not occur until mitigation has been completed, and the construction monitoring provisions of Mitigation Measure TCR-2 have been implemented. Any newly identified resources uncovered during Future Phases shall be treated in accordance with Mitigation Measure TCR-2 requirements.</p> | <p>Applicant shall include in application for SPD for future phases. County will ensure that this mitigation is implemented prior to approval of SPDs for future phases.</p>                      | Applicant/County             | County                        |
| <p><b>3.5-4 Cease Work, Contact County Coroner</b><br/> California law recognizes the need to protect interred human remains, particularly Native American burials and items of cultural patrimony, from vandalism and inadvertent destruction. If human remains are uncovered during project construction, construction shall halt immediately within 100 feet of the find and the Lake County Coroner, County, and the Applicant shall be notified. The procedures for the treatment of discovered human remains are contained in California Health and Safety</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | <p>The applicant shall implement monitoring and other actions as described in Mitigation Measure 3.5-4. The applicant shall include all of these requirements in construction contracts. (Use</p> | Applicant/County             | County                        |



| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Implementation and Timing                                                                                                                                                                               | Responsible for Implementing | Responsibility for Monitoring |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>Code §7050.5 and §7052 and California PRC §5097. The coroner is required to examine all discoveries of human remains within 48 hours of receiving notice of a discovery on private or state lands (Health and Safety Code Section 7050.5[b]). If the coroner determines that the remains are those of a Native American, he or she must contact the NAHC by phone within 24 hours of making that determination (Health and Safety Code Section 7050[c]). The County shall contact the Most Likely Descendent (MLD), as determined by the NAHC, regarding the remains. The MLD, in cooperation with the County and a qualified professional archaeologist, shall develop a plan of action to avoid or minimize significant effects to the human remains prior to resumption of ground-disturbing activities.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Permit COA)                                                                                                                                                                                             |                              |                               |
| <b>3.6 Geology and Soils</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                         |                              |                               |
| <p><b>3.6-1 Final Design-Level Geotechnical Report(s)</b><br/> The Applicant shall submit final design-level geotechnical report(s) produced by a California Registered Civil Engineer or Geotechnical Engineer for County review and approval. The report(s) shall address and make recommendations on the following:</p> <ol style="list-style-type: none"> <li>1. Road, pavement, and parking area design;</li> <li>2. Structural foundations, including retaining wall design (if applicable);</li> <li>3. Grading practices;</li> <li>4. Erosion/winterization;</li> <li>5. Special problems discovered onsite, (e.g., groundwater, compressive/expansive/unstable soils/liquefaction potential); and</li> <li>6. Slope stability (landslides).</li> </ol> <p>It is the responsibility of the Applicant to provide for engineering inspection and certification that earthwork has been performed in conformity with recommendations contained in the report.</p> <p>If the geotechnical report indicates the presence of critically expansive soils or other issues that could lead to structural defects, a certification of completion of the requirements of the geotechnical report shall be submitted to the County Community Development Department prior to issuance of building permits. This certification may be completed on a lot-by-lot basis or on a tract basis. This shall be so noted on the Improvement Plans, in the CC&amp;Rs, and on the Informational Sheet filed with the Final Subdivision Map(s). The preliminary geotechnical engineering report performed by</p> | <p>The applicant shall prepare reports and take actions as described in Mitigation Measure 3.6-1. The applicant shall include all of these requirements in construction contracts. (Use Permit COA)</p> | Applicant                    | County                        |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Implementation and Timing                                                                                                                                            | Responsible for Implementing | Responsibility for Monitoring |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>RGH Consultants, dated May 29, 2019 and revised December 6, 2019, indicated the presence of potentially expansive soils and landslides, which must be addressed in a design-level geotechnical report. At a minimum, the following recommendations of the preliminary geotechnical engineering report shall be adhered to:</p> <ol style="list-style-type: none"> <li>1. In general, cut and fill slopes should be designed and constructed at slope gradients of 2:1 (horizontal to vertical) or flatter, unless otherwise approved by the geotechnical engineer in specified areas. In expansive soil areas and serpentinite or highly weathered mélange bedrock, cut and fill slopes should be no steeper than 3:1. Where steeper slopes are required, retaining walls should be used unless approved by the project geotechnical engineer. Fill slopes steeper than 2:1 will require the use of geogrid to increase stability. If the owner is willing to accept ongoing maintenance, steeper slopes may be constructed within roadway cutslopes on a case-by-case basis. Cutslopes up to 1:1 may be allowable in certain areas with certain remedial measures.<br/>In general, slopes within serpentinite-derived soils and Franciscan mélange or serpentinite bedrock are highly weathered and are less stable than slopes on younger and/or harder bedrock types. In addition, some of the younger volcanic bedrock formations are rubbly to agglomeritic in nature and may be prone to rockfalls or debris flows as the clayey matrix becomes saturated on steep slopes. The geotechnical engineer should review preliminary site-specific grading plans and profiles for potential slope stability concerns.</li> </ol> <p>and/or</p> <ol style="list-style-type: none"> <li>2. The proposed building envelopes must be located outside unstable areas and steep slopes in order to reduce the risks associated with slope instability. Initially, a structural setback of approximately 50 feet from unstable areas and breaks in slope of 2:1 or steeper should be established. A site-specific study by the project geotechnical engineer should finalize recommended structural setbacks.</li> </ol> |                                                                                                                                                                      |                              |                               |
| <p><b>3.6-2 Worker Training, Cease Work, and Consult with Qualified Paleontologist</b><br/>A qualified professional paleontologist (as defined by the Society of Vertebrate Paleontology, 2010) shall provide awareness training, in written or multi-media form for construction personnel involved in earth-moving activities. Construction personnel to be involved with earth-moving activities shall be informed that fossils could be discovered during excavation that these fossils are protected by laws, on the</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <p>The applicant shall implement monitoring and other actions as described in Mitigation Measure 3.6-2. The applicant shall include all of these requirements in</p> | <p>Applicant/County</p>      | <p>County</p>                 |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Implementation and Timing                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Responsible for Implementing | Responsibility for Monitoring |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>appearance of common fossils, and on proper notification procedures should fossils be discovered.</p> <p>In the unlikely event that paleontological resources are encountered, work shall cease within 50 feet of the discovery, and the County shall be notified immediately. The Applicant shall retain a qualified professional paleontologist (as defined by the Society of Vertebrate Paleontology, 2010) to assess the significance of the find and recommend appropriate treatment measures. Recommendations shall include, but are not limited to, salvage and treatment as described by the Society of Vertebrate Paleontology (2010); this treatment shall include preparation, identification, determination of significance, and curation into a public museum. Any recommended mitigation shall be completed before construction resumes in the vicinity of the find.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <p>construction contracts. (Use Permit COA)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                             |                              |                               |
| <p><b>3.7 Greenhouse Gases and Climate Change</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                              |                               |
| <p><b>3.7-1 Operational GHG Emissions</b></p> <p>Prior to the issuance of the first certificate of occupancy for the relevant portion of the project (i.e., residential or commercial), as appropriate, the Applicant shall provide documentation to the County that the following measures have been achieved. It should be noted that these measures do not apply to on-going uses within the property that are not a component of the Proposed Project, including agricultural operations conducted under third party leases.</p> <p><i>Transportation Demand Management Measures</i></p> <p>Implement MM 3.13-4 to develop and implement a TDM Program to achieve a reduction in VMT as a result of the Proposed Project. At a minimum these measures will include:</p> <ul style="list-style-type: none"> <li>▪ Dedicated on-site parking for shared vehicles (vanpools/carpools);</li> <li>▪ Provide adequate, safe, convenient, and secure on-site bicycle parking and storage in the commercial portion of the project; and</li> <li>▪ Use of an electric fleet for internal transport vehicles (excluding trucks and other ranch vehicles for on-going agricultural and grazing activities) to the extent feasible (no less than 75 percent), including the golf course.</li> </ul> <p><i>Project Wide Measures</i></p> <ul style="list-style-type: none"> <li>▪ Use energy-efficient lighting that will reduce indirect criteria pollutants and GHG emissions. Using energy-efficient lighting will reduce energy usage and, thus,</li> </ul> | <p>Applicant to prepare TDM Program compliant with this Mitigation Measure and submit to County. County to review and approve prior to issuance of the first certificate of occupancy. (Use Permit COA)</p> <p>Lighting plans consistent with these requirements shall be submitted to County prior to approval of building permit. (Use Permit COA)</p> <p>Improvement Plans consistent with these requirements shall be submitted to County prior to approval of Final Maps. (TM COA)</p> | <p>Applicant/County</p>      | <p>County</p>                 |



| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Implementation and Timing | Responsible for Implementing | Responsibility for Monitoring |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------------------------------|-------------------------------|
| <p>reduce the indirect GHG emissions from the project. Energy-efficient lighting includes adaptive lighting systems or systems that achieve energy savings beyond those required by Title 24 lighting requirements to the maximum extent feasible.</p> <ul style="list-style-type: none"> <li>Utilize low-flow appliances and fixtures;</li> <li>Use of state-of-the-art irrigation systems that reduce water consumption including graywater systems and rainwater catchment;</li> <li>Use of drought-tolerant and native vegetation; and</li> <li>Achieve compliance with off-street electric vehicle requirements in the most recently adopted version of CALGreen Tier 2.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                          |                           |                              |                               |
| <i>Residential Measures</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                           |                              |                               |
| <ul style="list-style-type: none"> <li>Facilitate achievement of zero net energy buildings through installation of solar photovoltaic systems consistent with the 2019 Building Energy Efficiency Standards, CCR Title 24 Part 6. Compliance with this requirement must be demonstrated prior to issuance of occupancy permits for residential uses.</li> <li>Provide electrical outlets on the outside of the homes or outlets within the garages to encourage the use of electrical landscaping equipment.</li> <li>Use water efficient landscapes and native/drought-tolerant vegetation.</li> <li>Install smart meters and programmable thermostats.</li> <li>Use energy-efficient appliances in the residences where available. These include appliances that meet USEPAs Energy Star Criteria.</li> </ul>                                                                                                                                                                                                                                                                   |                           |                              |                               |
| <i>Resort/Commercial Measures</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                           |                              |                               |
| <ul style="list-style-type: none"> <li>Facilitate achievement of zero net energy buildings through the construction standards required under the 2019 Building Energy Efficiency Standards, CCR Title 24 Part 6 and the use of rooftop or on-site photovoltaic systems, with or without storage, or the acquisition of renewable energy or energy credits from another source, or generation onsite. Zero Net Energy shall mean that on a community-wide basis, the actual annual consumed energy will be less than or equal to the renewable generated energy utilized. It is the Project's goal to obtain enough renewable electrical energy for the Project's needs and to distribute it throughout the Guenoc Valley Site. Therefore, renewable energy supplies shall be secured and/or systems installed for each commercial structure prior to issuance of its final certificate of occupancy.</li> <li>Install on-site charging units for electric vehicles consistent with parking requirements in California Green Building Standards Code Section 5.106.5.2.</li> </ul> |                           |                              |                               |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                              | Implementation and Timing | Responsible for Implementing | Responsibility for Monitoring |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------------------------------|-------------------------------|
| <ul style="list-style-type: none"> <li>Install electric water heating instead of gas water heating for some or all of the project's hot water needs, to the extent such technology is readily available and commercially practicable.</li> <li>Minimize the use of propane gas at restaurants and replace with alternative equipment to the maximum extent feasible.</li> </ul> |                           |                              |                               |

*Purchase GHG Credits*

Prior to the issuance of building permits, the Applicant shall purchase GHG emission credits from a CARB approved registry source or project to offset the difference between the mitigated project emissions and the recognized 2030 service population thresholds. The credits must be established using CARB-consistent protocols and permanently retired. The table below converts the service population thresholds to metric tons per year based on the service population of the Proposed Project. Additionally, the table illustrates the difference between the total project emissions and the thresholds.

Therefore, prior the issuance of building permits for Phase 1, the Applicant shall purchase 14,865 carbon offset credits.

OPERATIONAL GHG EMISSIONS - MITIGATED

| Category                       | Year 2030                     |               |                  |
|--------------------------------|-------------------------------|---------------|------------------|
|                                | Phase 1                       | Future Phases | Total All Phases |
|                                | MT CO <sub>2</sub> e per year |               |                  |
| <b>Total Project Emissions</b> | 18,973                        | 11,873        | 30,846           |

| Mitigation Measure |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |        |       |        | Implementation and Timing                                                                                                                                                                                                                                                              | Responsible for Implementing | Responsibility for Monitoring |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|-------|--------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
|                    | Service Population (Residents + Employees <sup>1</sup> )                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 1,580  | 2,990 | 4,570  |                                                                                                                                                                                                                                                                                        |                              |                               |
|                    | Service Population Project Emissions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 12.0   | 4.0   | 6.7    |                                                                                                                                                                                                                                                                                        |                              |                               |
|                    | BAAQMD Threshold (MT CO <sub>2</sub> e/SP) <sup>2</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 2.6    | 2.6   | 2.6    |                                                                                                                                                                                                                                                                                        |                              |                               |
|                    | BAAQMD Service Pop Threshold Converted to total MT CO <sub>2</sub> e <sup>3</sup> per year                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 4,108  | 7,774 | 11,882 |                                                                                                                                                                                                                                                                                        |                              |                               |
|                    | Total Annual Project Emissions Above Threshold                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 14,865 | 4,099 | 18,964 |                                                                                                                                                                                                                                                                                        |                              |                               |
|                    | Notes:<br>1. Service population for Phase 1 includes both the project population increase from Phase 1 residential units and workforce housing, plus the 300 employment positions that would be generated. Service population for Future Phases includes the estimated population increase from future phases residential units and workforce housing, plus an estimated 200 employment positions.<br>2. 2030 service population threshold adjusted to account for 2017 Scoping Plan Update 40% Reduction Goal by 2030.<br>3. Calculated by multiplying the service population threshold by the service population of the project. |        |       |        |                                                                                                                                                                                                                                                                                        |                              |                               |
| 3.7-2              | Construction GHG Emissions<br>Implement Mitigation Measure 3.3-1 to reduce GHG emissions from construction of the Proposed Project.<br>a) To the maximum extent feasible, the contractors shall utilize Tier 4 engines or better, and Level 3 Diesel Filters during all phases of development. Compliance must be demonstrated with submittal of the equipment inventory, prior to approval of dust control plans.                                                                                                                                                                                                                 |        |       |        | Applicant to submit to LCAQMD a Construction Emission/Dust Control Plan and other information conforming to this Mitigation Measure within 30 days prior to groundbreaking. County to review prior to issuing Grading or Improvement Plans- (whichever occurs first). (Use Permit COA) | Applicant                    | County                        |
| 3.8                | Hazardous Materials                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |        |       |        |                                                                                                                                                                                                                                                                                        |                              |                               |



| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Implementation and Timing                                                                                                                                                                                                                                                                      | Responsible for Implementing | Responsibility for Monitoring |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p><b>3.8-1 Hazardous Materials Best Management Practices</b></p> <p>The following mitigation measures shall be implemented prior to the issuance of grading permits:</p> <ol style="list-style-type: none"> <li>1) Ensure through contractual obligations that all contractors prepare hazardous materials business plans and that they transport, store, and handle construction and remediation-related hazardous materials in a manner consistent with applicable regulations and guidelines. Components of the plan include, but are not limited to, transporting and storing materials in appropriate and approved containers, maintaining required clearances, and handling materials in accordance with the applicable federal, State, and/or local regulatory agency protocols. The hazardous materials business plans shall be submitted to the Lake County Division of Environmental Health for review and approval.</li> <li>2) In compliance with the CWA, a Stormwater Pollution Prevention Plan (SWPPP) shall be prepared for construction activities. Hazardous materials control measures identified in the SWPPP shall include, but not be limited to, the following: <ol style="list-style-type: none"> <li>a. A spill prevention and countermeasure plan shall be developed, which identifies proper storage, collection, and disposal measures for potential pollutants (such as fuel, fertilizers, pesticides, etc.) used onsite.</li> <li>b. Petroleum products shall be stored, handled, used, and disposed of properly in accordance with provisions of the CWA (33 USC § 1251 to 1387).</li> <li>c. During the wet season, construction materials, including topsoil and chemicals, and quarried materials shall be stored, covered, and isolated to prevent runoff losses and contamination of surface and groundwater.</li> <li>d. Fuel and vehicle maintenance areas shall be established away from all drainage courses and designed to control runoff.</li> <li>e. Sanitary facilities shall be provided for construction workers.</li> <li>f. Disposal facilities shall be provided for soil wastes, including excess asphalt during construction and demolition.</li> <li>g. Require that at all times a supervisor or other responsible employee trained in the proper handling, use, cleanup, and disposal of all chemical materials used during construction activities shall be present onsite and provide appropriate facilities to store and isolate contaminants.</li> <li>h. Encountered groundwater shall be removed from trenches and excavations in such a manner as to reduce potential contact with construction materials, construction personnel, surface waters, and, to the extent required by</li> </ol> </li> </ol> | <p>The Applicant shall implement monitoring and other actions, and obtain permits as described in Mitigation Measure 3.8-1 prior to issuance of grading permits and during construction. The applicant shall include all of these requirements in construction contracts. (Use Permit COA)</p> | <p>Applicant</p>             | <p>County</p>                 |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Implementation and Timing                                                                                                                                                                                                                                                                                                                                     | Responsible for Implementing | Responsibility for Monitoring |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>regulation or requirements, shall be disposed of at an appropriately permitted facility such as a wastewater treatment plant in accordance with the requirements of the National Pollutant Discharge Elimination System (NPDES) permit.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                                                                                                                               |                              |                               |
| <p><b>3.8-2 Prepare a Hazardous Materials Contingency Plan</b><br/> Prior to issuance of the grading permits, the Applicant shall provide to Lake County Division of Environmental Health a site-specific hazardous materials contingency plan. The plan will describe the necessary actions that would be taken if evidence of contaminated soil or groundwater is encountered during construction. The contingency plan shall identify conditions that could indicate potential hazardous materials contamination, including soil discoloration, petroleum or chemical odors, presence of underground storage tanks, or buried building material. Compliance with the plan will be included as a requirement within all construction bid specifications. If at any time during the course of constructing the Proposed Project evidence of soil and/or groundwater contamination with hazardous material is encountered, construction shall immediately cease and the Lake County Division of Environmental Health shall be contacted. Construction in the area affected by the contamination shall remain stopped until there is resolution of the contamination problem (through such mechanisms as soil or groundwater sampling and remediation if potentially hazardous materials are detected above threshold levels) to the satisfaction of Lake County Division of Environmental Health and Central Valley Regional Water Quality Control Board (CVRWQCB); construction on areas not affected by the contamination may continue during the remediation process.</p> <p>The plan, and obligations to abide by and implement the plan, shall be incorporated into the construction contract specifications of the project.</p> | <p>The applicant shall prepare a site- specific hazardous materials contingency plan, implement monitoring and other actions, and obtain permits as described in Mitigation Measure 3.8-2 prior to issuance of grading permits and during construction. The applicant shall include all of these requirements in construction contracts. (Use Permit COA)</p> | <p>Applicant/County</p>      | <p>County</p>                 |
| <p><b>3.8-3 Minimize Potential for Accidental Release of Hazardous Materials during Demolition</b><br/> a) Prior to demolition of existing structures, the Applicant shall:<br/> 1) Identify locations that could contain hazardous residues;<br/> 2) Remove plumbing fixtures known to contain, or potentially containing, hazardous materials;<br/> 3) Determine the waste classification of the debris;<br/> 4) Package contaminated items and wastes; and<br/> 5) Identify disposal site(s) permitted to accept such wastes. These activities will be conducted in compliance with all applicable federal, state, and local laws.<br/> b) Prior to demolition of existing structures, the Applicant shall provide written</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <p>The applicant shall implement Mitigation Measure 3.8-3 prior to issuance of grading permits and during construction. The applicant shall include all of these requirements in construction contracts. (Use Permit COA)</p>                                                                                                                                 | <p>County</p>                | <p>County</p>                 |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Implementation and Timing                                                                                                                                                                                                     | Responsible for Implementing | Responsibility for Monitoring |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>documentation to the County that asbestos testing and abatement, as appropriate, has occurred in compliance with applicable federal, State, and local laws.</p> <p>c) Prior to demolition of existing structures, the Applicant shall provide written documentation to the County that lead-based paint testing and abatement, as appropriate, has been completed in accordance with applicable State and local laws and regulations. Abatement shall include the removal of lead-contaminated soil (considered soil with lead concentrations greater than 400 parts per million in areas where children are likely to be present). If lead-contaminated soil is to be removed, the Applicant shall submit a soil management plan to Lake County Division of Environmental Health.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                               |                              |                               |
| <p><b>3.8-4 Reporting Geothermal Wells</b></p> <p>As recommended by the Division of Oil, Gas, and Geothermal Resources (Division) within the Department of Conservation and according to the County General Plan, the following shall be performed concerning geothermal well sites for the Guenoc Valley Site and the Off-Site Infrastructure Improvement Areas:</p> <ol style="list-style-type: none"> <li>1) The location of any known geothermal wells on the property shall be clearly identified on the project construction plans and communicated to the appropriate County recorder for inclusion in the title information of the subject real property.</li> <li>2) If any unknown geothermal well(s) is/are discovered during development, the County and the Division shall be notified immediately so that the newly discovered well(s) can be incorporated into the records and investigated in order to determine proper disposal, if required. Any previously unidentified wells found during project exploration and construction work shall be communicated to the appropriate County recorder for inclusion in the title information of the subject real property. This is to ensure that present and future property owners are aware of the wells located on the property, and the potentially significant issues associated with any improvements near geothermal wells.</li> <li>3) Before work on a low or high temperature gradient well is performed, written approval from the Division in the form of an appropriate permit shall be obtained. This includes, but is not limited to, mitigating leaking fluids or gas from abandoned wells, modifications to well casings, and/or any other re-abandonment work. If any well needs to be lowered or raised (i.e., casing cut down or casing riser added) to meet the grade regulation standard of 6 feet below ground, a permit from the Division is required before work can start.</li> </ol> | <p>The applicant shall implement Mitigation Measure 3.8-4 prior to issuance of grading permits and during construction. The applicant shall include all of these requirements in construction contracts. (Use Permit COA)</p> | <p>County</p>                | <p>County</p>                 |



| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Implementation and Timing                                                                                                                                                                                                                                                                                                                                  | Responsible for Implementing | Responsibility for Monitoring |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p><b>3.8-5 Asbestos Dust Mitigation Plan</b></p> <p>Prior to construction activities, an Asbestos Dust Mitigation Plan shall be prepared and submitted to the LCAQMD for review and approval. The Plan shall include the following components in order to reduce asbestos dust generation and meet the requirements of an asbestos dust mitigation plan as specified in Asbestos Airborne Toxic Control Measures (ATCM) for Construction, Grading, Quarrying, and Surface Mining Operations:</p> <ol style="list-style-type: none"> <li>1) Track-out prevention and control measures: <ol style="list-style-type: none"> <li>a) Removal of any visible track-out from a paved public road at any location where vehicles exit the construction site via wet sweeping or a HEPA filter equipped vacuum device at the end of the work day or at least once per day.</li> <li>b) Installation of one or more of the following track-out prevention measures: <ol style="list-style-type: none"> <li>i. A gravel pad designed using good engineering practices to clean the tires of exiting vehicles;</li> <li>ii. A tire shaker;</li> <li>iii. A wheel wash system;</li> <li>iv. Pavement extending for not less than 50 consecutive feet from the intersection with the paved public road; or</li> <li>v. Other measure that is deemed by the LCAQMD as effective as the measures listed above.</li> </ol> </li> </ol> </li> <li>2) Active storage piles will be adequately wetted or covered with tarps.</li> <li>3) Control for disturbed surface areas and storage piles that will remain inactive for more than seven (7) days shall have one or more of the following done: <ol style="list-style-type: none"> <li>a) Keep the surface adequately wetted;</li> <li>b) Establishment and maintenance of surface crusting that is sufficient to satisfy the test in subsection (h)(6) of the Asbestos ATCM for Construction, Grading, Quarrying, and Surface Mining Operations;</li> <li>c) Application of chemical dust suppressants or chemical stabilizers according to the manufacturers' recommendations;</li> <li>d) Covering with tarp(s) or vegetative cover;</li> <li>e) Installation of wind barriers of 50 percent porosity around three sides of a storage pile;</li> <li>f) Installation of wind barriers across open areas; or</li> <li>g) Other measure that is deemed by the LCAQMD as effective as the measures listed above.</li> </ol> </li> <li>4) Control for traffic on on-site unpaved roads, parking lots, and staging areas shall</li> </ol> | <p>The applicant shall prepare and implement an Asbestos Dust Mitigation Plan as described in Mitigation Measure 3.8-5. The Plan must be approved by LCAQMD prior to issuance of grading permits. The Plan shall be implemented during construction. The applicant shall include all of these requirements in construction contracts. (Use Permit COA)</p> | <p>Applicant</p>             | <p>LCAQMD / County</p>        |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Implementation and Timing | Responsible for Implementing | Responsibility for Monitoring |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------------------------------|-------------------------------|
| <p>include the following:</p> <ol style="list-style-type: none"> <li>1) A maximum vehicle speed limit of 15 mph or less; and</li> <li>2) One or more of the following: <ol style="list-style-type: none"> <li>i. Watering every two hours of active operations or sufficiently often to keep the area adequately wetted;</li> <li>ii. Applying chemical dust suppressants consistent with manufacturer's directions;</li> <li>iii. Maintaining a gravel cover with a silt content that is less than 5 percent and asbestos content that is less than 0.25 percent, as determined using an approved asbestos bulk test method, to a depth of 3 inches on the surface being used for travel; or</li> <li>iv. Other measure that is deemed by the LCAQMD as effective as the measures listed above.</li> </ol> </li> <li>5) Control for earthmoving activities shall include one or more of the following: <ol style="list-style-type: none"> <li>a) Pre-wetting the ground to the depth of anticipated cuts;</li> <li>b) Suspending grading operations when wind speeds are high enough to result in dust emissions crossing the project boundary despite the application of dust mitigation measures;</li> <li>c) Application of water prior to any land clearing; or</li> <li>d) Other measure that is deemed by the LCAQMD as effective as the measures listed above.</li> </ol> </li> <li>6) No trucks shall be allowed to transport excavated material offsite until the following are performed: <ol style="list-style-type: none"> <li>a) Trucks are maintained such that no spillage can occur from holes or other openings in cargo compartments; and</li> <li>b) Loads are adequately wetted and either: <ol style="list-style-type: none"> <li>i. Covered with tarps; or</li> <li>ii. Loaded such that the material does not touch the front, back, or sides of the cargo compartment at any point less than 6 inches from the top and that no point of the load extends above the top of the cargo compartment.</li> </ol> </li> </ol> </li> <li>7) Upon completion of the Proposed Project, disturbed surfaces shall be stabilized using one or more of the following methods: <ol style="list-style-type: none"> <li>a) Establishment of a vegetative cover;</li> <li>b) Placement of at least 3 inches of non-asbestos-containing material;</li> <li>c) Paving;</li> </ol> </li> </ol> |                           |                              |                               |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Implementation and Timing                                                                                                                                                                                                                                                                                                                                                                                                     | Responsible for Implementing | Responsibility for Monitoring |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <ul style="list-style-type: none"> <li>d) Any other measure sufficient to prevent wind speeds of 10 mph or greater from causing visible dust emissions.</li> <li>8) If deemed applicable by LCAQMD, an air quality testing component shall be developed and contain the following:               <ul style="list-style-type: none"> <li>a) Type of air sampling device(s);</li> <li>b) Siting of air sampling device(s);</li> <li>c) Sampling duration and frequency; and</li> <li>d) Analytical method.</li> </ul> </li> <li>9) A Site-Specific Health and Safety Plan shall be a component of the overall Asbestos Dust Mitigation Plan. The Health and Safety Plan shall include measures to protect all onsite workers and residents throughout all phases of the project.</li> </ul>                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                               |                              |                               |
| <p><b>3.8-6 Conduct Shallow Groundwater Characterization Plan for Construction of Off-Site Water Pipeline</b></p> <p>Prior to obtaining a dewatering permit associated with trenching activities for the off-site water pipeline in Butts Canyon Road, a Shallow Groundwater Characterization Plan will be developed in consultation with the CVRWQCB. The Shallow Groundwater Characterization Plan will outline the appropriate number of shallow groundwater samples to be collected and the analytes to be assessed in order to determine appropriate dewatering methods during pipeline construction. The results of the Shallow Groundwater Characterization Plan shall be provided to the Lake County Division of Environmental Health and CVRWQCB. Should the results indicate the presence of contaminated groundwater, an individual dewatering permit shall be obtained from the CVRWQCB, and all conditions adhered to Methods for disposal of contaminated groundwater may include but are not limited to transporting the water to an approved facility for treatment and discharge in accordance with NPDES permit requirements.</p> | <p>Prior to obtaining a dewatering permit associated with trenching activities for the off-site water pipeline in Butts Canyon Road, the applicant shall prepare and implement a Shallow Groundwater Characterization Plan will be developed in consultation with the CVRWQCB is described in Mitigation Measure 3.8-6. The applicant shall include all of these requirements in construction contracts. (Use Permit COA)</p> | <p>Applicant</p>             | <p>County</p>                 |
| <b>3.9 Hydrology and Water Quality</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                               |                              |                               |
| <p><b>3.9-1 Storm Water Pollution Prevention Plan</b></p> <p>Consistent with the requirements of the State Water Resources Control Board General Permit for Storm Water Discharges Associated with Construction and Land Disturbance Activities (Order 2022-0057-DWQ), the Applicant shall undertake the Proposed Project in accordance with a project-specific SWPPP. The CVRWQCB, the</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <p>The applicant shall obtain a project-specific SWPPP prior to ground disturbing activities and provide the County with verification of</p>                                                                                                                                                                                                                                                                                  | <p>County</p>                | <p>County</p>                 |



| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Implementation and Timing                               | Responsible for Implementing | Responsibility for Monitoring |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|------------------------------|-------------------------------|
| <p>primary agency responsible for protecting water quality within the project area, is responsible for reviewing and ensuring compliance with the SWPPP. The recommended BMPs, subject to review and approval by the CVRWQCB, include the measures listed below. However, the measures themselves may be altered, supplemented, or deleted during the CVRWQCB's review process, since the CVRWQCB has final authority over the terms of the SWPPP.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <p>compliance with the permit.<br/>(Use Permit COA)</p> |                              |                               |
| <p><i>General Construction</i></p> <ul style="list-style-type: none"> <li>a. Schedule and sequence construction activities to minimize the areal extent and duration of site disturbance at any time.</li> <li>b. Provide work exclusion zones outside of work areas to protect vegetation and to minimize the potential for removing or injuring trees, roots, vines, shrubs, and grasses.</li> <li>c. Avoid disturbance of riparian and wetland vegetation by installing flagging and temporary fencing.</li> <li>d. Use berms, ditches, or other structures to divert natural surface runoff around construction areas.</li> <li>e. Install weed-free fiber rolls, straw-wattles, coir logs, silt fences, or other effective devices along drainage channels to prevent soils from moving into creeks.</li> <li>f. Locate stockpiles at least 50 feet from creeks, drainage channels, and drainage swales, whenever possible.</li> <li>g. Install fiber rolls, straw-wattles, or silt fencing between stockpiles and creeks, drainage channels, and drainage swales.</li> <li>h. After excavating any open-cut slopes, install slope protection measures such as fiber rolls, drainage ditches, or erosion control fabrics to minimize the potential for concentrated surface runoff to cause erosion.</li> <li>i. Implement wind erosion or dust control procedures consisting of applying water or other dust palliatives as necessary to prevent or alleviate dust nuisance generated by construction activities. The contractor may choose to cover small stockpiles or areas as an alternative to applying water or other dust palliatives.</li> <li>j. Control water application rates to prevent runoff and ponding. Repair leaks from water trucks and equipment immediately.</li> </ul> <p><i>Hazardous Materials</i></p> <ul style="list-style-type: none"> <li>k. Keep hazardous materials and other wastes at least 100 feet from wetlands, creeks, drainage channels, and drainage swales, whenever possible.</li> </ul> |                                                         |                              |                               |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Implementation and Timing | Responsible for Implementing | Responsibility for Monitoring |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------------------------------|-------------------------------|
| <p>l. Store hazardous materials in areas protected from rain and provide secondary containment to prevent leaks or spills from affecting water quality.</p> <p>m. Implement the following hazardous materials handling, storage, and spill response practices to reduce the possibility of adverse impacts from use or accidental spills or releases of contaminants:</p> <ul style="list-style-type: none"> <li>▪ Develop and implement strict on-site handling rules to keep construction and maintenance materials out of drainages and waterways.</li> <li>▪ Conduct all refueling and servicing of equipment with absorbent material or drip pans underneath to contain spilled fuel. Collect any fluid drained from machinery during servicing in leak-proof containers and deliver to an appropriate disposal or recycling facility.</li> <li>▪ Maintain controlled construction staging, site entrance, concrete washout, and fueling areas a minimum of 100 feet from stream channels or wetlands whenever possible to minimize accidental spills and runoff of contaminants in stormwater.</li> <li>▪ Prevent raw cement; concrete, or concrete washings; asphalt, paint, or other coating material; oil or other petroleum products; or any other substances that could be hazardous to aquatic life from contaminating the soil or entering watercourses.</li> </ul> <p><i>Dewatering and Treatment Controls</i></p> <p>n. Prepare a dewatering plan prior to excavation.</p> <p>o. Impound dewatering discharges in sediment retention basins or other holding facilities to settle the solids and provide treatment prior to discharge to receiving waters as necessary to meet Basin Plan water quality objectives.</p> <p>p. In order to meet the Basin Plan water quality objectives, install turbidity barriers and collect and treat drainage and runoff water from any part of the work area that has become turbid with eroded soil, silt, or clay to reduce turbidity prior to discharge to receiving waters.</p> <p><i>Temporary Stream Crossings</i></p> <p>q. Construct temporary stream crossings using a temporary bridge with gravel approach ramps or temporary culverts backfilled with clean gravel/cobbles and topped with a gravel road base.</p> <p>r. Do not place earth and rockfill material in stream channels.</p> <p>s. Upon completion of the Proposed Project, remove or stabilize temporary stream</p> |                           |                              |                               |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Implementation and Timing                                                                                                                                                                                                                                                                                                                                             | Responsible for Implementing | Responsibility for Monitoring |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| crossings with banks graded to a stable angle.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                       |                              |                               |
| <p><b>3.9-2 Aggregate/Concrete Monitoring and Reporting Program</b><br/> The Applicant shall undertake the proposed aggregate and concrete production facility in accordance with permit requirements of the CVRWQCB. The Applicant shall submit a Report of Waste Discharge to the CVRWQCB. The Applicant shall comply with monitoring requirements and discharge prohibitions identified by the CVRWQCB. The recommended discharge prohibitions, subject to review and approval by the CVRWQCB, include the specifications listed below.</p> <ul style="list-style-type: none"> <li>a. Aggregate wash water must be retained within designated operational area and may not be allowed to be percolated or disposed on land or to drainages.</li> <li>b. Aggregate wash and wastewater ponds must be lined and meet storage capacity requirements, maintain adequate freeboard, and be designed to protect ponds from inundation due to floods with a 100-year return frequency.</li> <li>c. Commingling aggregate wastewater and concrete wastewater is prohibited.</li> <li>d. Construct continuous interior asphalt or concrete berms around batch plant equipment (mixing equipment, silos, concrete drop points, conveyor belts, admixture tanks, etc.) to facilitate proper containment and cleanup of releases. Rollover or flip top curbs or dikes should be placed at ingress and egress points.</li> <li>e. Direct runoff from the paved or unpaved portion of the concrete batch plant into a sump and pipe to a lined washout area or dewatering tank.</li> <li>f. All wastewater that contains residual concrete shall only be discharged to the concrete wastewater system (e.g., primary settling basin and secondary storage pond, or engineered alternative).</li> <li>g. Washout of concrete trucks must be conducted in a designated area with drainage to the concrete wastewater system.</li> <li>h. All stockpiled wastes and products shall be managed to prevent erosion of sediment to surface water drainage courses.</li> <li>i. Collected screenings, sludge, and other solids removed from liquid wastes shall be disposed of in a manner consistent with Consolidated Regulations for Treatment, Storage, Processing, or Disposal of Solid Waste, as set forth in Title 27, CCR, Division 2, Subdivision 1, Section 20005, et seq.</li> </ul> | <p>The applicant shall obtain an NPDES discharge permit and verification of coverage under the NPDES Construction General Permit from the CVRWQCB for the aggregate and concrete production facility prior to ground disturbing activities associated with that facility and provide the County with verification of compliance with the permit. (Use Permit COA)</p> | Applicant                    | County                        |
| <p><b>3.9-3 Off-Site Groundwater Well Safe Yield Analysis and Monitoring</b><br/> Prior to the issuance of an encroachment permit or grading permit for installation of</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <p>Prior to the issuance of an encroachment permit or</p>                                                                                                                                                                                                                                                                                                             | Applicant/County             | County                        |



| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Implementation and Timing                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Responsible for Implementing | Responsibility for Monitoring |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>off-site water line along Butts Canyon Road for the use of the off-site agricultural well for water supply on the Guenoc Valley Site, the Applicant shall provide to the County an analysis that defines the safe yield. The safe yield must be set to meet the following performance criteria: avoid drawdown of groundwater beyond 300 feet of the well. The analysis must incorporate pump testing of the well, and be certified by a Registered Professional Engineer or Registered Geologist. Groundwater pumping rates and durations must be limited to the safe yield determined in the hydraulic analysis. The safe yield analysis shall identify the location of one or more monitoring wells necessary to evaluate compliance with the performance criteria. Monitoring of groundwater pumping rates and durations and groundwater levels shall be performed quarterly for the first ten years of use. The Applicant shall be required to submit annual monitoring reports that provide quarterly groundwater pumping and groundwater level data to the Lake County Health Services Department for the first ten years of use. In the event these reports show an impact to the groundwater levels, the Lake County Health Services Department and the Applicant shall develop a Groundwater Management Plan in coordination with a geotechnical engineer for approval by the Community Development Director.</p> | <p>grading permit for installation of off-site water line along Butts Canyon Road for the use of the off-site agricultural well for water supply on the Guenoc Valley Site, the Applicant shall provide to the County an analysis that defines the safe yield as described in Mitigation Measure 3.9-3 and submit required monitoring reports as well as cooperate with the County to prepare a Groundwater Management Plan as described in Mitigation Measure 3.9-3. (Use Permit COA)</p> |                              |                               |
| <p><b>3.9-4 Floodplain Analysis</b></p> <p>Prior to the issuance of a grading permit for any development within 1,500 feet of Bucksnot Creek or Putah Creek, the Applicant shall provide to the County a floodplain analysis certified by a Registered Professional Engineer. This analysis shall define the extent of floodwaters (floodplain) and the elevations associated with 100-year flood event within proposed development areas along these creeks. If, due to the performed analyses, the changes in the effective Floodplain Maps and Flood Insurance Studies occur, the Developer will apply for a Letter(s) of Map Revision with the Federal Emergency Management Agency.</p> <p>Prior to the issuance of a grading permit for development of the Middletown Housing Site, including off-site improvements, the Applicant shall provide to the County a floodplain analysis certified by a Registered Professional Engineer. The analysis shall identify any changes in the extent of the 100-year floodplain or changes in flood depths within 750 feet of the Middletown Housing Site that would occur as the result of the proposed housing development and associated improvements. Drainage features shall be incorporated into the project design to ensure that the development</p>                                                                                                                       | <p>The Applicant shall provide to the County a floodplain analysis meeting the requirements of this Mitigation Measure with applications for any grading permit for development within 1,500 feet of Bucksnot Creek or Putah Creek, along with Letter(s) of Map Revision with the Federal Emergency Management Agency if required. (Use Permit COA)</p> <p>The Applicant shall provide to the County a floodplain</p>                                                                      | Applicant                    | County                        |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Implementation and Timing                                                                                                                                                                                                                                                                                                                                 | Responsible for Implementing | Responsibility for Monitoring |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| will not increase the extent or depth of flooding in adjacent areas. These features may include the additional of drainage swales or larger detention basin capacity within the site.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | analysis meeting the requirements of this Mitigation Measure with applications for any grading permit for development within the Middletown Housing Site.                                                                                                                                                                                                 |                              |                               |
| <b>3.9-5 Inundation Mapping</b><br>Prior to the issuance of a grading permit for any development within 4,000 feet of Bucksnot Creek or Putah Creek, the Applicant shall provide to the County inundation maps of Detert Reservoir (Guenoc Lake), Langtry Lake, Bordeaux Lake, Burgundy Lake, and McCreary Lake dams that have been approved by Division of Safety of Dams                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | The Applicant shall provide to the County inundation maps of Detert Reservoir (Guenoc Lake), Langtry Lake, Bordeaux Lake, Burgundy Lake, and McCreary Lake dams that have been approved by DSOD with applications for any grading permit for development within 4,000 feet of Bucksnot Creek or Putah Creek. (Use Permit COA)                             | Applicant                    | County                        |
| <b>3.9-6 Incorporation of Floodplains and Dam Inundation Zones in Site Plans</b><br>a. All site plans submitted to the County for the review of any development within 1,500 feet of Bucksnot Creek or Putah Creek shall identify the extent of the 100-year floodplain within proposed development areas. The 100-year floodplain shown shall be as certified by a Registered Professional Engineer.<br><br>b. All site plans submitted to the County for the review of any development within 4,000 feet of Bucksnot Creek or Putah Creek shall identify the extent of the inundation zones of Detert Reservoir (Guenoc Lake), Langtry Lake, Bordeaux Lake, Burgundy Lake, and McCreary Lake dams within proposed development areas. Maximum inundation depths shall be identified on the site plans.<br><br>c. For any facilities identified within the 100-year floodplain or inundation zone, including at the Guenoc Valley, Middletown Housing ,and off-site well sites, any hazardous materials or materials that may pollute flood waters such as, but not | Applicant to prepare site plans meeting the requirements of this Mitigation Measure and submit to County with applications for development as described in this Mitigation Measure. County to review and make determinations and require appropriate conditions of approval prior to any approvals of such conditionally permitted uses. (Use Permit COA) | Applicant/County             | County                        |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Implementation and Timing                                                                                                                                                     | Responsible for Implementing | Responsibility for Monitoring |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>limited to fuel, oil, chemicals, pesticides, fertilizer, or cleaning products, shall be adequately protected from release in flood waters or relocated out of the 100-year floodplain and inundation zone.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                               |                              |                               |
| <p><b>3.10 Noise</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                               |                              |                               |
| <p><b>3.10-1 Restrict Construction Times in Areas in Proximity to Sensitive Receptors</b><br/>Construction activities within 1 mile of occupied residential uses not within the Guenoc Valley Site, and where feasible, all construction deliveries, shall be restricted to occur between the hours of 7:00 A.M. and 7:00 P.M.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <p>County to incorporate this restriction into the Conditions of Approval of the project. Applicant to add these requirements to construction contracts. (Use Permit COA)</p> | <p>Applicant/County</p>      | <p>County</p>                 |
| <p><b>3.10-2 Construction Noise Reduction</b><br/>The following measures shall be implemented to reduce impacts of construction noise.</p> <ul style="list-style-type: none"> <li>▪ To reduce construction noise levels at off-site sensitive receptors as well as wildlife within the site, construction contractors shall be required to implement the following measures. These measures would be incorporated into the construction plan: <ul style="list-style-type: none"> <li>○ Equipment and trucks used for project construction shall utilize the best available noise control techniques, such as improved mufflers, equipment redesign, use of intake silencers, ducts, engine enclosures and acoustically-attenuating shields or shrouds.</li> <li>○ Impact tools (e.g., jack hammers, pavement breakers, and rock drills) used for project construction shall be hydraulically or electrically powered wherever possible to avoid noise associated with compressed air exhaust from pneumatically powered tools. However, where use of pneumatic tools is unavoidable, an exhaust muffler on the compressed air exhaust shall be used; this muffler can lower noise levels from the exhaust by up to about 10 dBA. External jackets on the tools themselves shall be used, to achieve a reduction of 5 dBA. Quieter procedures will be used, such as drills rather than impact equipment.</li> <li>○ Stationary noise sources shall be located as far from adjacent receptors as possible, and they will be muffled and enclosed within temporary sheds, incorporate insulation barriers, or other</li> </ul> </li> </ul> | <p>County to incorporate this restriction into the Conditions of Approval of the project. Applicant to add these requirements to construction contracts. (Use Permit COA)</p> | <p>Applicant/County</p>      | <p>County</p>                 |



| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Implementation and Timing                                                                               | Responsible for Implementing | Responsibility for Monitoring |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>measures.</p> <ul style="list-style-type: none"> <li>○ Locate fixed construction equipment such as compressors and generators as far as possible from sensitive receptors. Shroud or shield all impact tools, and muffle or shield all intake and exhaust ports on power construction equipment.</li> <li>▪ Designate a disturbance coordinator and conspicuously post this person's number around the project site and in adjacent public spaces. The disturbance coordinator shall receive all public complaints about construction noise disturbances and shall be responsible for determining the cause of the complaint, and implement any feasible measures to be taken to alleviate the problem.</li> <li>▪ Well Drilling and Pipeline Construction Noise (Off-Site Infrastructure Improvement only): <ul style="list-style-type: none"> <li>○ Noise curtains shall be utilized during drilling of the well if, at the time of well construction, homes are occupied within 1,000 feet of the well.</li> </ul> </li> </ul> |                                                                                                         |                              |                               |
| <p><b>3.10-3 Future Phases Noise Control</b><br/>Prior to County approval of conditionally permitted uses which include more substantial exterior noise sources such as amphitheaters and event venues, a noise study shall be prepared by an acoustical engineer that identifies the necessary measures required to achieve compliance with the County's Noise Level Performance Standards at the nearest sensitive receptors. The County shall require that the measures identified in the noise study are implemented as a condition of approval of conditional use permits.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                  | (Use Permit COA)                                                                                        | Applicant/County             | County                        |
| <p><b>3.10-4 Restrict Aircraft and Non-Emergency Helicopter Flight Times</b><br/>Inbound and outbound flight times to and from the float dock and helicopter landing pads shall be limited to the hours of 7 A.M. to 7 P.M. every day of the week with exceptions for emergency situations only.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | County to incorporate this restriction into the Conditions of Approval of the project. (Use Permit COA) | County                       | County                        |
| <p><b>3.13 Transportation</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                         |                              |                               |
| <p><b>3.13-1 Implement Improvements at SR-29 and Butts Canyon Road</b><br/>Prior to issuance of grading permits for Phase 1, the Developer shall execute and deliver to Caltrans an agreement to mitigate the impacts to the intersection of SR-29 and Butts Canyon Road by paying to Caltrans the cost of the following:</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Applicant to enter into an agreement with Caltrans that meets the requirements of this                  | Applicant                    | County                        |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Implementation and Timing                                                                                                                                                                                                                            | Responsible for Implementing | Responsibility for Monitoring |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>State Route 29 at Butts Canyon Road (Intersection #7) – Installation of an intersection control improvement—roundabout or three-way traffic signal with crosswalks, depending on results of an Intersection Safety and Operational Assessment Process (ISOAP).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <p>Mitigation Measure prior to issuance of grading permits for Phase 1. (Use Permit COA)</p>                                                                                                                                                         |                              |                               |
| <p><b>3.13-2 Pay Fair Share towards Lake County Intersection Improvements</b><br/> The Developer shall execute and deliver to Caltrans an agreement that requires payment, or provides bonding for, a proportionate share of the construction costs of the following improvements. The timing for collection of the fees and implementation of the improvements will be at the discretion of Caltrans as the lead agency.</p> <ul style="list-style-type: none"> <li>State Route 29 at Hartmann Road (Intersection #5) – Expansion of the existing roundabout or other intersection control improvement, depending on the results of an Intersection Safety and Operational Assessment Process (ISOAP) (ISOAP; required under Baseline plus Phase 1).</li> <li>SR-29 at Spruce Grove Road South (Intersection #3) – Installation of an intersection control improvement—roundabout or three-way traffic signal with crosswalks, depending on results of an ISOAP (required under cumulative plus Phase 1).</li> <li>SR-29 at Hidden Valley Road (Intersection #4) – Installation of an intersection control improvement, roundabout or four-way traffic signal with crosswalks, depending on results of an ISOAP (required under cumulative plus Phase 1).</li> </ul> | <p>Applicant to enter into an agreement with Caltrans that meets the requirements of this Mitigation Measure prior to recordation of Final Maps. (TM COA)</p>                                                                                        | <p>Applicant</p>             | <p>County</p>                 |
| <p><b>3.13-3 Conduct Traffic Study and Implement Mitigation for Future Phases</b><br/> As specified in the Development Agreement, an updated Project Level traffic impact analysis shall be completed prior to approval of future Project phases to determine if future phases would conflict with adopted circulation plans and policies. Improvement measures determined for future phases shall be coordinated with applicable jurisdictional agencies as appropriate, including Lake County, Napa County, City of Calistoga, and Caltrans.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <p>Applicant to prepare updated project-level traffic impact analysis and submit to County with applications for future phases. County to review and make determinations/coordinate with other agencies prior to any approvals of future phases.</p> | <p>Applicant/County</p>      | <p>County</p>                 |
| <p><b>3.13-4 Implement a Transportation Demand Management Program</b><br/> Prior to issuance of occupancy permits for Phase 1, the Applicant shall develop and submit to the County a final Transportation Demand Management Program for the Proposed Project. The TDM plan shall identify all feasible measures to reduce the VMT per capita of the Proposed Project to below the regional average to the extent</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <p>Applicant to prepare TDM Program compliant with this Mitigation Measure and submit to County. County to review and approve prior to</p>                                                                                                           | <p>Applicant</p>             | <p>County</p>                 |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Implementation and Timing                                                   | Responsible for Implementing | Responsibility for Monitoring |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>feasible. The goal of the TDM Program shall be a 15 percent in reduction in the VMT generated by the Proposed Project. The County shall verify compliance with the plan prior to issuance of occupancy permits for the Proposed Project. Additionally, the Applicant shall undertake annual monitoring and reporting of the TDM Plan, in accordance with Section 1.4 of Appendix TDM. Section 1.4 of Appendix TDM includes provisions regarding the timing, scope, and implementation of monitoring and reporting requirements, and requires the Applicant to adjust the TDM plan based on the monitoring results. The following strategies shall be identified within the TDM plan to reduce the VMT generated by the Proposed Project:</p> <ul style="list-style-type: none"> <li>▪ <i>Private Shuttle Service</i> – There are currently no plans for Lake Transit to run buses along Butts Canyon Road near the project site and the nearest bus stops are about six miles away in Middletown. While it is possible Lake Transit might consider adding a stop on Butts Canyon Road in the future to serve project employees, it is our understanding that there is no funding available for it at this time. Alternatively, the project shall provide a frequent direct weekday shuttle service specifically for employees during the peak morning and evening commute periods. This could operate between the project site any and off-site work force housing with a stop at the Lake Transit bus transfer point in Middletown. Please note that shuttles would need be fully accessible to passengers using wheelchairs. It is recommended the applicant also explore providing a real-time smart-phone app that tracks arrivals to make shuttle use more reliable and convenient. Shuttle service for patrons of the project has been assumed as part of this analysis. The current assumption is that regular shuttle service to and from San Francisco and Sacramento will accommodate approximately 40% of resort patrons. The management shall monitor and provide adequate shuttle headways to accommodate all employees and guests who wish to use the shuttle services.</li> <li>▪ <i>On-call Dial-A-Ride Service</i> – The management shall provide free on-call dial-a-ride transportation service connecting the Guenoc Valley Site to the community of Middletown and to regional transit services. The service shall be made available to the general public within a 15-mile radius of the site, in addition to employees, patrons, and residents of the Proposed Project.</li> <li>▪ <i>Carpool and Ride-Matching Assistance Program</i> – Although on-site employee parking is limited, the management shall offer personalized ride-matching assistance to pair employees interested in forming commute carpools. As an</li> </ul> | <p>issuance of the first certificate of occupancy.<br/>(Use Permit COA)</p> |                              |                               |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Implementation and Timing | Responsible for Implementing | Responsibility for Monitoring |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------------------------------|-------------------------------|
| <p>enhancement, management may consider using specific services such as ZimRide, TwoGo by SAP, Enterprise RideShare, 511.org RideShare or the equivalent.</p> <ul style="list-style-type: none"> <li>▪ <i>Preferential Parking for Carpoolers/Vanpoolers</i> – The management shall offer preferential carpool parking for eligible commuters. To be eligible for carpool parking, the carpool shall consist of three or more people. The number of preferential parking spaces will be based on the number of participants in the program. The management shall monitor and provide adequate carpool spaces to meet or exceed potential demand.</li> <li>▪ <i>Dedicated Parking Spaces for Car Share Services</i> – The management will set aside parking spaces to be dedicated for use by car share services to serve employees. This is expected to reduce parking demand and GHG emissions associated with the project by providing more flexibility for employees who otherwise utilize alternate modes. The availability of car share services within a project can potentially reduce the demand for employees to own their own cars. Car share services allow for employees to make midday trips without needing to have their own personal vehicle on site. The availability of car share services within a project can potentially reduce the demand for employees to commute by car or even own their own cars. In addition to dedicating parking spaces for car share services for employees, the management may consider dedicating additional parking spaces for car share vehicles dedicated for guest use, if demand exists. The availability of such cars makes traveling to the Project site without a personal vehicle more appealing for some guests. The management shall monitor and provide adequate car share spaces to meet or exceed potential demand.</li> <li>▪ <i>On-Site Sales of Transit Passes</i> – The building management shall offer direct on-site sales of Lake County Transit Authority transit passes purchased and sold at a bulk group rate to employees. Although Lake Transit Authority does not currently operate transit service to the site directly, some employees who live in the greater Lake County and surrounding areas may take public transit to Middletown and then could take the private shuttle to the Project site. Offering on-site transit pass sales reduces the barrier of purchasing transit passes and provides a bulk discount to employees, further encouraging transit use as a primary commute mode.</li> <li>▪ <i>TDM Coordinator</i> – Management shall designate a “TDM coordinator” to coordinate, monitor and publicize TDM activities. The effectiveness of</li> </ul> |                           |                              |                               |



| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Implementation and Timing                                                                                                                                                                                                | Responsible for Implementing                             | Responsibility for Monitoring |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|-------------------------------|
| <p>providing a TDM Coordinator on auto mode share is uncertain but is generally seen as a supportive measure that is beneficial to implement the other TDM measures. The Project sponsor may instruct the management company to designate their on-site manager as the TDM coordinator, or they may designate someone else.</p> <ul style="list-style-type: none"> <li>▪ <i>Transportation and Commute Information Kiosks</i> - An information board or kiosk will be located in a common gathering area (e.g., lobby, employee entrance, break, or lunch room). The kiosk will contain transportation information, such as Emergency Ride Home (ERH), transit schedules, bike maps, and 511 ride- matching. Information will be updated periodically by the designated TDM Coordinator.</li> <li>▪ <i>Tenant Performance and Lease Language – TDM Requirements</i> - For all tenants, the applicant will draft lease language or side agreements that require the identification of a designated contact responsible for compliance and implementation of the TDM program.</li> <li>▪ <i>Tenant/Employer Commute Program Training</i> - As needed and applicable, the applicant or property management will provide individual tenants of the project with initial TDM (and commute) program training, and commute program start- up assistance. The overarching goals of this support function are to reduce commute trips for employees and assist with employee marketing and outreach.</li> <li>▪ <i>Employee Transportation Brochure</i> - All employees will be provided with an Employee Transportation Brochure regarding the Commute Program. This brochure will include (but not be limited to) information about shuttle service, carpool parking, transit opportunities, ride-matching services, bicycle routes, and emergency rides home.</li> </ul> |                                                                                                                                                                                                                          |                                                          |                               |
| <p><b>3.13-5 Pay a Fair Share towards Pedestrian and Bicycle Improvements</b><br/>Prior to issuance of occupancy permits for Phase 1 and future phases, the Applicant shall enter into an agreement with the Lake City/County Area Planning Council to pay a proportionate impact fee towards pedestrian and bicycle improvement projects in Lake County and Middletown.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <p>Applicant to enter into an agreement with Lake City/County Area Planning Council that meets the requirements of this Mitigation Measure prior to issuance of the first certificate of occupancy. (Use Permit COA)</p> | <p>Applicant/ Lake City/County Area Planning Council</p> | <p>County</p>                 |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Implementation and Timing                                                                                                                                                                                                                                                                                                         | Responsible for Implementing | Responsibility for Monitoring |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <b>3.16 Wildfire</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                                   |                              |                               |
| <p><b>3.16-1 Fire Prevention during Construction</b></p> <p>Any construction equipment that normally includes a spark arrester shall be equipped with an arrester in good working order. This includes, but is not limited to, vehicles, heavy equipment, and chainsaws. During construction, staging areas and areas slated for development using spark-producing equipment shall be cleared of dried vegetation or other materials that could serve as fire fuel. To the extent feasible, the contractor shall keep these areas clear of combustible materials in order to maintain a firebreak.</p> <p>Additionally, the following measures shall be required on the Guenoc Valley Site:</p> <ul style="list-style-type: none"> <li>▪ Every work area shall have one round tip shovel, and one water type fire extinguisher accessible within 10 feet.</li> <li>▪ Portable Fire Extinguisher rated at a minimum of 4/ABC or larger shall be in every vehicle, or piece of equipment except for privately owned vehicles.</li> <li>▪ In general, during fire season, mowing of vegetation should be completed prior to noon.</li> <li>▪ Hot Work shall have Fire Watch in place during and 30 minutes after.</li> <li>▪ Persons activating 911 shall know where they are on property to give directions.</li> <li>▪ All persons shall have access to a cell phone or radio system to activate 911.</li> <li>▪ Persons activating 911 shall arrange an escort from the entrance at 22000 Butts Canyon Road to the location of the emergency for the first arriving emergency apparatus.</li> <li>▪ Each construction site shall be provided with a hand-held pressurized air horn such as a marine device (or similar) to alert others of an emergency.</li> <li>▪ A certified firefighter shall be available on-site during construction.</li> </ul> | <p>Applicant to incorporate these measures into the Wildfire Prevention Plan and obtain County approval of revised Wildfire Prevention Plan prior to approval of Grading or Improvement Plans- (whichever occurs first). Wildfire Prevention Plan shall be issued to every contractor and construction crew. (Use Permit COA)</p> | <p>Applicant/County</p>      | <p>County</p>                 |
| <p><b>3.16-2 Post-Wildfire Emergency Response</b></p> <p>After a wildfire, response measures shall include actions to minimize slope instability and installation of warning signs. Immediate actions may include identifying impending threats to safety and property, checking all culverts to ensure proper drainage and installing erosion control mats and fiber rolls around steep areas. There shall also be long-term recovery and restoration actions to rehabilitate burned areas that have the potential to impact safety and property.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | <p>Applicant to incorporate these measures into the Wildfire Prevention Plan and obtain County approval of revised Wildfire Prevention Plan prior to approval of Grading or</p>                                                                                                                                                   | <p>Applicant/County</p>      | <p>County</p>                 |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Implementation and Timing                                                                                                                                                                                                                                      | Responsible for Implementing | Responsibility for Monitoring |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>The post wildfire emergency response plan (PWERP) will also include standards for a five-year long-term recovery and restoration plan to rehabilitate any burned areas that have the potential to impact safety and property. These measures could include restoring burned habitat, reforestation, mulching, and treating noxious weed infestations. This would be prepared by a qualified personnel with burned area restoration expertise and in coordination with and to the approval of the Lake County Department of Environmental Health.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <p>Improvement Plans- (whichever occurs first). (Use Permit COA)</p>                                                                                                                                                                                           |                              |                               |
| <p><b>3.16-3 Prepare South Lake County Evacuation Traffic Management Plan to Reduce Near-Term Evacuation Times, Incorporate in Updated Lake County Emergency Operations Plan (EOP), and Implement Evacuation Traffic Management Measures</b></p> <p>The applicant shall fund the administrative costs for preparation and adoption of a South Lake County Evacuation Traffic Management Plan, which shall be adopted prior to the issuance of the first certificate of occupancy for Phase 1. Lake County Office of Emergency Services (OES) shall be the Lead Agency for adoption of the plan and implementation of the traffic management measures, working in collaboration with other responsible agencies as noted below. The Evacuation Traffic Management Plan strategies, in combination with other mitigation measures described below, shall achieve a 15-minute reduction in total evacuation times for a full evacuation of South Lake County, thereby reducing the 30 minutes in added overall evacuation time due to Phase 1 Project evacuation trips. The Evacuation Traffic Management Plan shall be subject to the approval of the Lake County OES, the Lake County Sheriff, the South Lake County Fire Protection District, Caltrans, and the California Highway Patrol (CHP). The approved version of the South Lake County Evacuation Traffic Management Plan shall be incorporated into an updated version of the Lake County Emergency Operations Plan (Lake County Office of Emergency Services) and the Lake County Community Wildfire Protection Plan (CWPP), with evacuation management strategies and improvement measures to address major bottlenecks in the South Lake County evacuation network. These measures shall include but will not be limited to the following:</p> <ul style="list-style-type: none"> <li>▪ <i>SR 29 Evacuation Traffic Reduction Measure</i> – at the time of an evacuation order for a full South Lake County evacuation and as determined by the Incident Commander and County Sheriff, CHP and/or other police enforcement personnel shall implement measures to stop through traffic on SR 29 through the evacuation area such as stopping northbound SR 29 traffic at Tubbs Lane in Napa County and southbound SR 29 traffic at SR 53 in Lower Lake, thus reducing traffic levels on SR</li> </ul> | <p>Applicant shall prepare the South Lake County Evacuation Traffic Management Plan compliance with this Mitigation Measure and submit to County OES. County to review and adopt prior to issuance of the first certificate of occupancy. (Use Permit COA)</p> | <p>Applicant/County</p>      | <p>County</p>                 |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Implementation and Timing                                                                                              | Responsible for Implementing | Responsibility for Monitoring |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>29 during an evacuation. This measure would prevent inbound traffic on SR 29 from accessing the South Lake County evacuation network but would allow outbound evacuating vehicles to exit via SR 29.</p> <ul style="list-style-type: none"> <li>▪ <i>Hidden Valley Lake Evacuation Traffic Management Measure</i> – at the time of an evacuation order for a full South Lake County evacuation and as determined by the Incident Commander and County Sheriff, Lake County Sheriff and/or other police enforcement personnel shall implement traffic management for the Hidden Valley Lake community that addresses bottlenecks at the intersections of SR 29 and Hidden Valley Lake community egress roads. The officers would direct Hidden Valley Lake evacuating traffic away from the direction of the wildfire and in a coordinated direction to reduce or avoid conflicting movements at the intersections.</li> <li>▪ <i>Guenoc Valley Project SR 29 Evacuation Traffic Reduction Measure</i> – at the time of an evacuation order for a full South Lake County evacuation, evacuating project traffic shall be directed to alternate routes to SR 29. Unless precluded by wildfire, evacuating project traffic shall be directed to the planned project egress intersections on Butts Canyon Road and to the south on Butts Canyon Road. This measure would not apply if Butts Canyon Road were closed due to wildfire. In that event (such as under Scenario B), evacuating project trips would be directed to travel north on Butts Canyon Road (or via Grange Road as needed), south on SR 29 to Middletown, and then north on SR 175 (presuming that SR 29 to the south over Mt. St. Helena was also closed). Additional details are described for this measure in Mitigation Measure 3.16-4.</li> <li>▪ <i>SR 29 Traffic Signal Evacuation Operational Enhancement Measures</i> – a description of the traffic signal evacuation operational enhancement measures described in Mitigation Measure 3.16-5 shall be included in the Updated Lake County EOP.</li> </ul> |                                                                                                                        |                              |                               |
| <p><b>3.16-4 Reduce Evacuation Time Impacts on SR 29 by Minimizing Project-Related Evacuation Traffic on SR-29</b></p> <ul style="list-style-type: none"> <li>▪ Prior to occupancy of any project uses, the applicant shall install variable message signs at the outbound lanes of the three project egress roads that connect to Butts Canyon Road and Grange Road. Lake County shall be the Lead Agency to oversee installation of the variable message signs within the project site. The variable message signs shall be connected to the on-site Emergency Response Center so that evacuation-related messages can be controlled by fire personnel managing the evacuation. At the time of an evacuation order for a full South Lake County</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <p>Applicant shall complete improvements prior to issuance of the first certificate of occupancy. (Use Permit COA)</p> | <p>Applicant</p>             | <p>County</p>                 |



| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Implementation and Timing                                                                                                                                                                  | Responsible for Implementing       | Responsibility for Monitoring |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|-------------------------------|
| <p>evacuation, evacuating project traffic shall be directed to alternate routes to SR 29. Unless precluded by wildfire, evacuating Project traffic shall be directed to the planned egress intersections on Butts Canyon Road and to the south on Butts Canyon Road.</p> <ul style="list-style-type: none"> <li>The roundabout that will be constructed by the project applicant at the SR 29/Butts Canyon Road intersection shall include a southbound bypass lane to increase intersection capacity after preparation of an Intersection Safety and Operational Assessment Process (ISOAP).</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                            |                                    |                               |
| <p><b>3.16-5 Implement SR 29 Traffic Signal Evacuation Operational Enhancement Measures</b></p> <ul style="list-style-type: none"> <li>Prior to issuance of the first certificate of occupancy for any Project uses, the applicant shall design, obtain permits for, and install improvements to the signalized intersection of SR 29/SR 53 intersection in Lower Lake and the two signalized intersections on SR 29 in Middletown (SR 175 and Wardlaw Street). The improvements would be funded by the project applicant who shall obtain permits from Caltrans and/or Lake County. The variable message signs and traffic signal controllers shall be connected to Caltrans and Lake County traffic operations staff so they can be managed remotely during an evacuation. Improvements at the SR 29/SR 53 intersection in Lower Lake shall include extending the length of the northbound left turn pocket by 175 feet to a length of approximately 400 feet which could be accomplished by restriping the existing striped median, installing variable message signs on three approaches (i.e., eastbound, southbound, and westbound), and developing and installing wildfire signal timing plans that can be implemented by County staff during a wildfire that significantly extend maximum green times on the northbound approach. Improvements at the two intersections on SR 29 in Middletown include developing and installing wildfire signal timing plans that can be implemented by County staff during a wildfire that significantly extend maximum green times on the northbound and/or southbound approaches depending on conditions.</li> </ul> | <p>Applicant shall obtain permits for and complete improvements prior to issuance of the first certificate of occupancy. (Use Permit COA)</p>                                              | <p>Applicant, County, Caltrans</p> | <p>County, Caltrans</p>       |
| <p><b>3.16-6 Provide Dedicated Project Evacuation Shuttles for Phase 1 Hotel Uses</b></p> <ul style="list-style-type: none"> <li>Prior to the issuance of the first certificate of occupancy for any Project hotel uses, the applicant shall acquire and provide storage for dedicated evacuation shuttle buses that can serve 45 percent of all guests (i.e., six 20-person buses at full occupancy of all Phase 1 hotel uses). Applicant shall identify and provide signage for bus stop evacuation pick-up zones at all hotels, and identify evacuation routes and shelter locations. Applicant shall designate shuttle drivers (hotel staff) and provide ongoing training for staff and drivers for the shuttle buses.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | <p>Applicant shall acquire and provide storage for evacuation shuttle buses as required by Mitigation Measure prior to issuance of the first certificate of occupancy (Use Permit COA)</p> | <p>Applicant</p>                   | <p>County</p>                 |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Implementation and Timing                                                                                                                                                                                                                                                               | Responsible for Implementing | Responsibility for Monitoring |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <ul style="list-style-type: none"> <li>The Project shall obtain, maintain, and store dedicated evacuation shuttles for hotel guests, as individual hotel projects are completed, at a rate of 0.9 shuttle bus seats per room. If shuttle buses with a 20-person capacity are acquired, a total of six dedicated evacuation shuttle buses for hotel guests would be provided for the 127 hotel units when all Phase 1 hotels are completed. The Project shall train employees to operate the shuttles and be aware of alternative routes to designated shelter locations.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                         |                              |                               |
| <p><b>3.16-7 Updated South Lake County Evacuation Traffic Management Plan</b></p> <p>As part of the future project-level CEQA evacuation assessment of full build-out of the Project and prior to issuance of the first certificate of occupancy for any uses beyond those included in Phase 1, the Project shall develop evacuation time reduction strategies to reduce forecast evacuation levels in the Evacuation Area, which the Project will be required to implement after occupancy of such uses. The measures would include any combination of demand, supply, and/or communication strategies as described below such that (1) the added evacuation time estimates (ETEs) (i.e., time until the last evacuee leaves the Evacuation Area) due to Project full build-out evacuation trips shall not exceed one hour beyond the total cumulative no project ETEs for a full evacuation of the Evacuation Area under either Scenario A or B, and (2) the estimated number of added Project full build-out evacuation trips on Butts Canyon Road shall not exceed its evacuation capacity.</p> <p>Prior to issuance of the first certificate of occupancy for any use beyond those included in Phase 1, the applicant shall fund the administrative costs for preparation and adoption of a South Lake County Evacuation Plan (Evacuation Plan) that includes strategies to reduce overall cumulative ETEs for the Evacuation Area as described above, and the Evacuation Plan shall have been approved by the Lake County Office of Emergency Services (OES), the Lake County Sheriff, the South Lake County Fire Protection District, and the California Highway Patrol (CHP). Prior to the approval of the Evacuation Plan, a project-level CEQA analysis shall be conducted that analyzes the impacts of any proposed use beyond those included in Phase 1 on evacuation routes, and confirms that the strategies included in the Evacuation Plan meet the performance standards described above related to added ETEs and the evacuation capacity of Butts Canyon Road. The approved version of the South Lake County Evacuation Plan shall be incorporated into an updated version of the Lake County EOP (Lake County Office of Emergency Services).</p> | <p>Applicant shall complete prior to issuance of the first certificate of occupancy for future phases (any use beyond those included in Phase 1). County will ensure that this mitigation is implemented prior to issuance of the first certificate of occupancy for future phases.</p> | <p>Applicant/County</p>      | <p>County</p>                 |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Implementation and Timing                                                                                                                                                                                                                                        | Responsible for Implementing | Responsibility for Monitoring |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <ul style="list-style-type: none"> <li>▪ <i>Demand Strategies</i> – demand-side strategies that may reduce evacuation time estimates (ETEs) and evacuation trips include vehicle reduction and phased evacuation measures. A vehicle reduction strategy may include a combination of land use program reductions and/or measures to increase vehicle occupancy (i.e., additional shuttles). A community-wide policy encouraging households to limit the number of evacuating vehicles to one per household is another demand reduction strategy that could help reduce overall evacuation times. Reduction of the number of housing units shall be implemented as a strategy only if implementation of all other feasible demand-side, supply-side, and communication strategies would not reduce ETEs or exceedance of the capacity of Butts Canyon Road sufficiently to meet the performance standards described above.</li> <li>▪ <i>Supply Strategies</i> – supply-side strategies that may reduce ETEs include road lane widening, shoulder widening to provide an additional egress lane, contraflow lane operations (i.e., allowing two lanes of outbound traffic, if needed), and intersection traffic control measures.</li> <li>▪ <i>Communication Strategies</i> – communication strategies that may reduce ETEs include early warning systems, enhanced communication systems, and dynamic route guidance and monitoring.</li> </ul> <p>The above strategies are programmatic in nature and may be refined following the additional project-level CEQA analysis described above based on more specific details regarding future Project phases that will be included in application submittals for such phases, evolving evacuation analysis methods, any future changes to roadway infrastructure and/or capacity, and/or new or enhanced evacuation mitigation strategies.</p> |                                                                                                                                                                                                                                                                  |                              |                               |
| <b>3.16-8 Provide Dedicated Project Evacuation Shuttles for Full Build-out Hotel Uses</b><br>Consistent with Mitigation Measure 3.16-6, prior to the issuance of the first certificate of occupancy for any new hotel uses beyond those included in Phase 1, the applicant shall acquire and provide storage for dedicated evacuation shuttle buses that can serve 45 percent of all guests. Applicant shall identify and provide signage for bus stop evacuation pick-up zones at all hotels and identify evacuation routes and shelter locations. Applicant shall designate shuttle drivers and provide ongoing training for staff and drivers for the shuttle buses, including information on alternative evacuation routes and shelter locations. If shuttle buses with a 20-person capacity are acquired, a                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Applicant shall complete prior to issuance of the first certificate of occupancy for hotel uses in future phases. County will ensure that this mitigation is implemented prior to issuance of the first certificate of occupancy for hotels under future phases. | Applicant/County             | County                        |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Implementation and Timing  | Responsible for Implementing | Responsibility for Monitoring                |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------------------------|----------------------------------------------|
| total of up to eighteen dedicated evacuation shuttle buses for hotel guests would be provided for up to 400 hotel units when all hotels are completed.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                            |                              |                                              |
| <b>3.16-9 Implement Operational Wildfire Risk Reduction Activities</b><br>The Applicant and/or HOA shall ensure that the following wildfire risk reduction measures are conducted throughout the Guenoc Valley Site in accordance with the Wildfire Prevention Plan: <ul style="list-style-type: none"> <li>▪ <b>HOA contract with a wildfire expert for Project duration to support homeowner education and response planning.</b> The HOA will be required by its by-laws to contract with a wildfire expert for the duration of the Project, with costs paid by the HOA; the HOA shall consult with the wildfire expert in its implementation of wildfire prevention measures, including those identified within the WPP. The HOA will also cover the costs associated with having on-site at least one individual with wildfire expertise related to evacuation and emergency response at the Project's Emergency Response Center.</li> <li>▪ <b>Defensible space for all buildings (minimum 100 ft for residential, and 300 ft for non-residential).</b> The project CC&amp;Rs will require that homeowners and commercial/facility managers establish and maintain defensible space of no less than 100 feet for residential structures and no less than 300 feet for commercial structures in accordance with Zone 0, Zone 1, and Zone 2 guidance. Dead, dying, invasive, poorly-maintained, and fire-prone vegetation shall be removed and/or reduced within these areas in accordance with the WPP. Trees and shrubs should be selectively addressed to reduce flammable vegetation parts, including pruning dead or lower branches. The HOA and wildfire expert shall inspect properties annually to ensure compliance.</li> <li>▪ <b>Vegetation Management for fire risk reduction.</b> A Vegetation Management Plan (VMP) shall be prepared and updated annually by a qualified wildfire expert to organize and monitor active landscape management strategies as outlined in the WPP. The VMP shall include livestock grazing throughout the undeveloped rural landscapes as well as certain resort, residential, and vineyard landscapes and manual removal of dead, dying, or invasive vegetation through mowing, trimming, cutting, and brush removal. Ongoing vegetation management shall be conducted in accordance the VMP.</li> </ul> | At time of first occupancy | Project Applicant            | CAL FIRE & Community Development Department. |



| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Implementation and Timing                                                                                     | Responsible for Implementing | Responsibility for Monitoring |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <ul style="list-style-type: none"> <li>▪ <b>HOA funding for annual vegetation and defensible space management.</b> The HOA shall provide annual funding for implementation of the VMP, including vegetation management and defensible space upkeep.</li> <li>▪ <b>Strategically placed fire breaks and resort edge defensible space.</b> One-hundred-foot wide shaded fuel breaks shall be established and maintained at select vulnerable areas of the project boundary as indicated in the WPP. The fire break along the northern property boundary shall be installed prior to occupancy of structures north of Butts Canyon Road, and the fire break along the southern property boundary shall be installed prior to the occupancy of structures south of Butts Canyon Road.</li> <li>▪ <b>Roadside reduced fuel zone (40 ft on either side of road beyond 10ft hardscape shoulder).</b> All roadways shall be bordered on each side by a 50-foot fuel reduction zone, including to the extent that the topography feasibly permits, an area of approximately 10 feet on each side of the roadways improved with hardscape within the total 50-foot fuel reduction zone. Prior to issuance of the first certificate of occupancy for a structure within each subdivision under each final map, the full roadway fire break network for that subdivision shall have been completed.</li> <li>▪ <b>Restrictions on Debris Burning.</b> The project CC&amp;Rs will include strict prohibitions against burning of yard waste, cleared vegetation and other forms of debris. No open fires will be permitted.</li> <li>▪ <b>Parking restricted on primary access roads.</b> Signs shall be installed along project roadways to restrict parking and enforced by the HOA.</li> <li>▪ <b>Opt-out alert and communication system.</b> All residents, visitors, and employees will be enrolled in an opt-out phone-based communication system, such as Nixle, to receive emergency notifications. This system will supplement the site-wide emergency siren system to ensure that everyone is alerted of important emergency information and updates.</li> </ul> |                                                                                                               |                              |                               |
| <b>4.11 Tribal Cultural Resources</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                               |                              |                               |
| <b>TCR-1 Phase 1 TCR Avoidance Strategies</b><br>Mitigation Measure 3.5-1 shall be implemented to avoid all identified tribal cultural resource sites during project construction, development, and operation activities. A buffer of 50 feet shall be established around the perimeter of each tribal cultural site and a semi-permanent fence shall be erected that will remain in place throughout                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | The applicant shall implement surveys, avoidance and monitoring as described in Mitigation Measure 3.5-1. The | Applicant                    | County                        |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Implementation and Timing                                                                                                                                                                                     | Responsible for Implementing | Responsibility for Monitoring |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|-------------------------------|
| <p>construction. The fence shall be installed with a qualified archaeologist and tribal monitor in attendance, and shall determine the established buffer for the location. The buffer can be reduced or modified to accommodate sensitive environmental conditions, based on the assessment of the qualified archaeologist and tribal monitor or cultural advisor (see Mitigation Measure TCR-2).</p> <p>If construction will encroach closer than 50 feet, a qualified archaeological and tribal monitor shall be retained to monitor those activities. Should tribal cultural resources be uncovered within the buffer, all construction in the immediate area shall halt until the find can be assessed for NRHP/CRHR eligibility in accordance with current professional standards using minimization measures and the provisions of the Unanticipated Discoveries Plan developed in compliance with Mitigation Measure TCR-2.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | <p>applicant shall include all of these requirements in construction contracts. (Use Permit COA)</p>                                                                                                          |                              |                               |
| <p><b>TCR-2 Unanticipated Discoveries Plan and Construction Monitoring</b></p> <ol style="list-style-type: none"> <li>1) Tribal Cultural Advisor: Prior to initial ground disturbance, the Applicant shall retain a project Tribal Cultural Advisor designated by the Middletown Rancheria (Tribe), to direct all mitigation measures related to tribal cultural resources as defined by Public Resources Code 21074(a).</li> <li>2) Unanticipated Discoveries Plan: Prior to project construction, a qualified professional archaeologist shall be retained to prepare an Unanticipated Discoveries Plan in consultation with Middletown Rancheria, or to update an existing Unanticipated Discoveries Plan supplied by the Tribe. At a minimum, the Unanticipated Discoveries Plan shall include: <ul style="list-style-type: none"> <li>▪ Minimization of impact strategies to be agreed upon by the archaeological monitor and tribal monitor or tribal cultural advisor. Minimization measures mean: <ul style="list-style-type: none"> <li>○ Avoidance. Priority shall first be given to leaving cultural resources in place and avoidance of any further unnecessary disturbance. The highest priority is to avoid disturbance to cultural resources. All cultural resources shall be left in situ, that is, in place, in the same position in which they were discovered and shall not be removed from the discovery site until arrangements are made for reburial or transfer in accordance with the below. If leaving the resources in situ is not possible, temporary housing at a secured storage location at the discovery site mutually agreed upon by the archaeological and</li> </ul> </li> </ul> </li> </ol> | <p>The applicant shall implement monitoring and other actions as described in Mitigation Measure TCR-2. The applicant shall include all of these requirements in construction contracts. (Use Permit COA)</p> | <p>Applicant</p>             | <p>County</p>                 |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Implementation and Timing | Responsible for Implementing | Responsibility for Monitoring |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------------------------------|-------------------------------|
| <p>tribal monitor may be considered.</p> <ul style="list-style-type: none"> <li>○ Reburial. In situations where avoidance is not feasible, priority shall next be given to immediately reburying the cultural resources in the same location as found, only deeper. In the event that the cultural resources cannot be re-buried in the same location, only deeper, then priority shall next be given to immediately re-burying the cultural resources in an appropriate location within 100 feet of their original discovery in an area that shall not be subject to future subsurface disturbances. If for any reason immediate reburial in place, only deeper, or in an appropriate location within 100 feet of the original discovery is not feasible, then cultural resources may be re-buried in an appropriate location as determined by the Tribal Cultural Advisor in an area that shall not be subject to future subsurface disturbances.</li> <li>○ Transfer. In the event that avoidance and reburial above described is not feasible, cultural resources may be removed and transferred to a location designated by the Middletown Rancheria.</li> <li>○ Laboratory studies, scientific analysis, curation, or video recording shall only be permitted if required to assess CRHR eligibility, or if such strategies are the only means available to mitigate impacts to CRHR eligible resources. Prior to conducting any such studies, the tribal cultural advisor must be consulted. The archaeologist may draw the cultural resources for mapping purposes; however, no electronic means of recording the cultural resources shall be permitted without prior consultation with the Middletown Rancheria.</li> </ul> <ul style="list-style-type: none"> <li>▪ Description of field or laboratory methods to be used to investigate Unanticipated Discoveries (also applicable to known resources that will be impacted by project construction), to include types of excavation units, screening methods, and sample collection, as appropriate;</li> <li>▪ A list of permitted in-field analyses or laboratories to be used for specific analyses, as appropriate;</li> <li>▪ Provisions for reburial or transfer of recovered materials, developed in consultation with Middletown Rancheria.</li> <li>▪ Measures for documentation of results, including forwarding results to the NWIC as appropriate;</li> <li>▪ A Burial Treatment plan, provided by the Tribe, shall be followed if Native</li> </ul> |                           |                              |                               |

| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Implementation and Timing | Responsible for Implementing | Responsibility for Monitoring |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------------------------------|-------------------------------|
| <p>American remains are discovered during construction;</p> <ul style="list-style-type: none"> <li>▪ Maps (provided in pdf and shapefiles to the construction contractor, Applicant, and County) of areas that have not been included in a previous archaeological survey;</li> <li>▪ Maps of known resource locations (provided in pdf and shapefiles) shall be included in any construction documents that include identification of archaeological monitoring areas, identification of sites where pre-construction archaeological testing or archaeological and tribal monitoring during construction is required, identification of appropriate buffer zones for individual site protection during construction, cease work requirements, unanticipated finds reporting requirements;</li> <li>▪ Assessment criteria to determine NRHP/CRHR eligibility; and</li> <li>▪ A no-collections policy will be instituted for the Proposed Project, except where a site-specific treatment plan or the Unanticipated Discoveries Plan developed in consultation with the Tribe, calls for collection of a sample of artifacts or materials and analysis.</li> </ul> <p>Should any cultural resources, such as wells, foundations, or debris, or unusual amounts of bone, stone or shell, artifacts, burned or baked soils, or charcoal be encountered during ground-disturbing activities, work shall cease within 100 feet of the discovery and the Construction Contractor, Applicant, and Middletown Rancheria shall be notified immediately. The Applicant shall retain a qualified professional archaeologist to assess the find in consultation with the Tribal Cultural Advisor. The Tribe must have an opportunity to inspect and determine the nature of the resource and the best course of action for avoidance, protection and/or treatment of tribal cultural resources to the extent permitted by law, should the find consist of prehistoric or historic-era materials related to Native American occupation or use of the vicinity. If the find appears to be eligible for listing on the NRHP or CRHR, or is determined to be a tribal cultural resource by the Middletown Rancheria, then the provisions of the Unanticipated Discoveries Plan shall be adhered to, which will include consultation with Middletown Rancheria for tribal cultural resources. If the find consists of historic-era materials unrelated to the Native American community, the archaeologist shall determine its significance in compliance with NHPA and CEQA criteria. If adverse effects to a cultural resource cannot be avoided, the Minimization Measures described under the requirements for the Unanticipated Discovery Plan shall be implemented to the extent feasible.</p> |                           |                              |                               |



| Mitigation Measure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Implementation and Timing | Responsible for Implementing | Responsibility for Monitoring |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|------------------------------|-------------------------------|
| <p>3) Construction Monitoring: Consistent with Mitigation Measure 3.5-2, all ground disturbing activities shall be monitored by qualified tribal monitor(s). Ground disturbing activities occurring in conjunction with the Project include, but are not limited to, surveys, testing, concrete pilings, debris removal, rescrapes, punch lists, erosion control (mulching, waddles, hydroseeding, etc.), pot-holing or auguring, boring, grading, trenching, foundation work, excavations, and ground disturbance involving the moving of dirt or rocks with heavy equipment or hand tools within the Project area. Qualified tribal monitor(s) are defined as qualified individual(s) who have experience with identification, collection, and treatment of tribal cultural resources of value to the Tribe. Such individuals will include those who:</p> <ul style="list-style-type: none"> <li>a. Possess the desired knowledge, skills, abilities, and experience established by the Native American Heritage Commission (NAHC) through the NAHC's Guidelines for Native American Monitors/Consultants (2005) (<a href="https://nahc.ca.gov/wp-content/uploads/2019/04/SB-18-Tribal-Consultation-Guidelines.pdf">https://nahc.ca.gov/wp-content/uploads/2019/04/SB-18-Tribal-Consultation-Guidelines.pdf</a>); OR</li> <li>b. Members of culturally affiliated tribe(s) who: <ul style="list-style-type: none"> <li>i. Are culturally affiliated with the project area, as determined by the NAHC; and</li> <li>ii. Have been vetted by tribal officials of the Culturally Affiliated Tribes as having the desired knowledge, skills, abilities, and experience established by the Culturally Affiliated Tribes.</li> </ul> </li> </ul> |                           |                              |                               |

**Table 2: Project Commitments**

| Project Design Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Timing and Implementation | Implementing Party | Monitoring Party |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|--------------------|------------------|
| <p><b>1 Construction Project Design Features.</b></p> <p><b>The project applicant will implement the following construction equipment features for equipment operating at the Project Site, as well as the following construction protocols. These features and protocols would be included in applicable bid documents, and successful contractor(s) must demonstrate the ability to supply such equipment and comply with such protocols. Construction features would include the following:</b></p> |                           |                    |                  |

| Project Design Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Timing and Implementation   | Implementing Party                         | Monitoring Party                            |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|--------------------------------------------|---------------------------------------------|
| 1.1 A portion of the construction workers will stay in temporary on-site housing during construction to reduce traffic and minimize greenhouse gas contribution throughout all stages of construction. Even with accommodations on-site, employee shuttles will be available to move the contractors throughout the site, also reducing the traffic on Butts Canyon Road and any commuter traffic.                                                                                                                                                                                                                          | Construction only           | Project Applicant                          | Lake County                                 |
| 1.2 Any person entering the site will be required to pick up the emergency handout pamphlet, available at all the entrances. This pamphlet is co-authored by ranch management & CalFire personnel to ensure accurate emergency contact information, ember or spark suppression, and a Ranch Map. This plan shall be laminated, in color, and updated as necessary to include the most recent road layout in conjunction with site development.                                                                                                                                                                              | At all times.               | Project Applicant                          | Lake County                                 |
| 1.3 All construction, contractors, and resort vehicles on the Ranch shall be required to be equipped with a shovel, fire extinguisher, and water in the event any small fire is sparked, all vehicles and personnel will have the immediate ability to act.                                                                                                                                                                                                                                                                                                                                                                 | At all times.               | Project Applicant                          | Lake County                                 |
| 1.4 Educational training programs will be in place for all construction employees on fire prevention and safety.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Prior to construction.      | Project Applicant, Construction Management | Lake County                                 |
| 1.5 A full-time qualified Fire professional will be hired to advise on all on-site activities, future planning, and site maintenance activities.                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Prior to Construction.      | Project Applicant.                         | Lake County                                 |
| <b>2 Operations Project Design Features.</b><br><b>The project applicant will implement the following operational equipment requirements and operation protocols for equipment operating at the Project Site. These features would be included in applicable bid documents, and successful contractor(s) must demonstrate the ability to supply such equipment and comply with such protocols. Operation features would include the following:</b>                                                                                                                                                                          |                             |                                            |                                             |
| 2.1 The Project includes an on-site Emergency Response Center, which shall be designed to CalFire Standards. This emergency response center will house a helipad that is for essential services and emergency use only and will be built as the very first phase. All helipads will be built to accommodate larger, firefighting helicopters and will provide a fire- rated water source (hydrant or fire pump) to allow for refilling. The South Lake County Fire Protection District (SLCFPD) would provide fire protection and fire suppression services to the Guenoc Valley Site and would staff the on-site emergency | At time of first occupancy. | Project Applicant.                         | CalFire & Community Development Department. |

| Project Design Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Timing and Implementation       | Implementing Party | Monitoring Party                                                                                                         |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|--------------------|--------------------------------------------------------------------------------------------------------------------------|
| <p>response and fire center, which will ultimately become SLCFPD Station #61. Approximately 500 square feet of the emergency response and fire center would be dedicated to the Lake County Sheriff's Office for emergency response and law enforcement services.</p>                                                                                                                                                                                                                                                                                                                                                                                                               |                                 |                    |                                                                                                                          |
| 2.2 [Deleted and Moved to <b>Mitigation Measure 3.16-1</b> in <b>Table 1</b> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                 |                    |                                                                                                                          |
| 2.3 As part of the project intent to increase early warning systems for the Guenoc Valley and surrounding landscapes, a high-definition fire camera shall be placed at the highest topography or within key areas of the Project. This will be utilized by CalFire or any private Fire Security team.                                                                                                                                                                                                                                                                                                                                                                               | At time of first occupancy      | Project Applicant  | CalFire & Community Development Department.                                                                              |
| 2.4 An Emergency Evacuation Plan shall be provided to all residents, guests, and employees that identifies and describes emergency meeting areas, routes for safe egress, and protocol for fire safety. The plan shall be prepared consistent with the contents and information provided in the South Lake County Emergency Plan, and shall be provided to all guests that enter the property and posted within guest rooms. In addition, signage shall be installed for emergency meeting areas. The Wildfire Evacuation Plan must be prepared in cooperation with and approved by CalFire, the South Lake County Fire Protection District and the Lake County Sheriff Department. | At time of first occupancy      | Project Applicant  | Community Development Department, CalFire, South Lake County Fire Protection District and Lake County Sheriff Department |
| 2.5 Establish a separate Road Network plan for Emergency Personnel Ingress & Egress that notes the roads dedicated only for emergency access occasions during interim construction and development.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Prior to Construction. Ongoing. | Project Applicant  | Community Development Department, CalFire, South Lake County Fire Protection District and Lake County Sheriff Department |

| Project Design Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Timing and Implementation                                     | Implementing Party            | Monitoring Party                              |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|-------------------------------|-----------------------------------------------|
| 2.6 [Deleted and superseded by <b>Mitigation Measure 3.16-1</b> in <b>Table 1</b> ]                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                               |                               |                                               |
| 2.7 Security Patrol. The project will maintain 24-hour security patrols, which will aid in early identification of fire events.                                                                                                                                                                                                                                                                                                                                                                                                                | At time of occupancy.                                         | Project Applicant.            | HOA                                           |
| 2.10 Recycling and reuse of all wastewater generated by commercial and resort uses, and most wastewater generated by residential uses. Recycled water must account for approximately 25% of the outdoor water supply.                                                                                                                                                                                                                                                                                                                          | At time of occupancy                                          | Project Applicant             | Community Development Department              |
| 2.11 The use of drought tolerant native vegetation in landscaping                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | At time of occupancy.<br>Ongoing.                             | Project Applicant.            | Community Development Department              |
| 2.12 Electric fleet for the resort commercial uses (no less than 75 percent)                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | At time of occupancy.<br>Ongoing.                             | Project Applicant.            | Community Development Department              |
| 2.13 If the Off-Site Groundwater Well is utilized to supply water to the Project, monitoring consistent with Mitigation Measure 3.9-3 will continue for the life of the Project beyond the minimum 10-year period designated within the mitigation measure.                                                                                                                                                                                                                                                                                    | At use of the off-site well for Proposed Project water supply | Project Applicant             | Health Services Department                    |
| 2.14 Non-emergency aircraft flight times to and from the float dock and helicopter landing pad shall be further restricted to landing no earlier than 8 A.M. during winter months (November through March) and 8 A.M. to 7 P.M. in the summer months (April to October) when there is more daylight.                                                                                                                                                                                                                                           | At time of occupancy.<br>Ongoing.                             | Project Applicant             | Community Development Department              |
| <b>3 Project Design Features</b><br><b>The project applicant would implement the following project design features. These features would be included in applicable construction or building application documents. Many of these features are detailed within the Guenoc Valley District Zoning Ordinance and/or the Guenoc Valley District Design Guidelines. Design features would include the following:</b>                                                                                                                                |                                                               |                               |                                               |
| 3.1 All occupiable buildings shall be equipped with exterior fire suppression systems, Class A- rated roofs with non-combustible covering, fire-resistant eaves, non-combustible vents and leaf guards, fire-resistant material for exposed foundations, and fire-resistant decks. Exterior windows and doors should be multi-paned with a tempered layer and non-combustible. Fencing should be non-combustible and at least 5 feet from structures.<br><br>Exterior fire suppression systems shall be fully autonomous in the event power is | At time of Building Permit.                                   | Project Applicant, Architects | Community Development Department, Plan Check. |



| Project Design Features                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Timing and Implementation                                                                                                                                                                                                                                                                                                                                        | Implementing Party                                              | Monitoring Party                                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|-----------------------------------------------------------|
| cut/shut off, allowing the activation to be fully operational at all times without intervention or activation.                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                  |                                                                 |                                                           |
| 3.2 All roads within the Guenoc Valley District shall be two-way roads that comply with State slope and width requirements.                                                                                                                                                                                                                                                                                                                                                                                                                   | Vegetation Maintenance begins at time of first Occupancy of that road. Road and street standards shall be proven at time of grading permit.                                                                                                                                                                                                                      | Project Applicant, Civil Engineers, Construction & Site Manager | Community Development Department, Office of Public Works. |
| 3.3 All residential parcels, regardless of the size of the parcel, shall be restricted to the predetermined buildable envelope, as described in the Design Guidelines. The building envelope shall be 1.5 acres, unless the residential parcel is within oak woodland, in which case the buildable envelope shall be no greater than 1 acre. Additional, residential development shall only occur if further environmental review is conducted and any additional impacts are mitigated per the direction of the Oak Mitigation Plan and EIR. | At time of building permit.                                                                                                                                                                                                                                                                                                                                      | Project Applicant, Architects & Landscape Designers             | Community Development Department                          |
| 3.4 The Site shall maintain on-site irrigated vineyards, as described within the Wildfire Prevention Plan, to create and maintain irrigated buffers to act as fire breaks throughout the site. In the event the vineyards are removed an irrigated fire break will continue.                                                                                                                                                                                                                                                                  | Review at time of final map.                                                                                                                                                                                                                                                                                                                                     | Project Applicant,                                              | Community Development Department                          |
| 3.5 The Project will clear and maintain 50-foot vegetation management on either side of the roads within the Guenoc Valley for a total fire break of 125-feet, creating a roadway network that provides safe egress and access in the event of an emergency. Additionally, property boundary shaded fuel breaks shall be installed, as depicted on Figure 2-6 of the PREIR.                                                                                                                                                                   | At final occupancy of each structure, applicable fire breaks along roadways providing access to that structure shall be installed. At the time of the recording of the last final map for each of the four subdivision groups (Bohn Ridge Subdivision, Equestrian Subdivision, Maha Farms Subdivision, and Denniston Golf Estates Subdivision), the full roadway | Project Applicant.                                              | Community Development Department                          |

| Project Design Features                                                                                                                                                                                                                                              | Timing and Implementation                                                                                                                                           | Implementing Party | Monitoring Party                 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------------------------|
|                                                                                                                                                                                                                                                                      | fire break network shall be completed within that subdivision.                                                                                                      |                    |                                  |
| 3.6 Evacuation route signage shall meet all of the CalFire requirements and be included throughout the Guenoc Valley site. Specific signage shall be placed at emergency vehicle access roads, for emergency personnel only. Signage should indicate ingress/egress. | At time of first occupancy.<br>Ongoing                                                                                                                              | Project Applicant. | Community Development Department |
| 3.7 A Fire siren shall be placed within the Project Site that shall work in conjunction with the multiple early warning systems.                                                                                                                                     | At time of first occupancy.                                                                                                                                         | Project Applicant. | Community Development Department |
| 3.8 Interior Fire alarm systems shall be connected to the Project security systems.                                                                                                                                                                                  | At time of Building Permit.                                                                                                                                         | Project Applicant. | Community Development Department |
| 3.9 Joint trench design will include a hard-wired communication system for all residences.                                                                                                                                                                           | At time of Grading Permit.                                                                                                                                          | Project Applicant. | Community Development Department |
| 3.10 Each resident or guest unit will communicate with the security system when occupied for emergency evacuation communication purposes.                                                                                                                            | At time of occupancy.                                                                                                                                               | Project Applicant. | HOA                              |
| 3.11 The Project will establish 50 workforce housing units at the Middletown Housing Site, or 35 workforce housing units at the Guenoc Valley Site, or both.                                                                                                         | At time of first occupancy of resort uses.                                                                                                                          | Project Applicant. | Community Development Department |
| 3.14 Installation of 300 electric vehicle charging stations as part of Phase 1.                                                                                                                                                                                      | At time of occupancy of resort uses. The percentage of stations installed must be equal to the percentage of resort units (hotel and resort residential) developed. | Project Applicant. | Community Development Department |

| Project Design Features                                                                                                                                                                                                                              | Timing and Implementation                                                                                                                                                                                                                                                                                                                                                        | Implementing Party | Monitoring Party                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------------------------|
| 3.16 Providing on-site refuse collection bins for recyclable waste, compostable waste, and standard waste, in addition to on-site Compost and Recycling Centers                                                                                      | At time of first occupancy. Ongoing.                                                                                                                                                                                                                                                                                                                                             | Project Applicant. | Community Development Department |
| 3.17 Site-wide lighting design shall preserve nighttime dark skies by minimizing the use of outdoor lighting. Lighting fixtures shall utilize energy-efficient lamps and motion-sensing lighting systems to minimize unnecessary nighttime lighting. | At time of first occupancy. Ongoing.                                                                                                                                                                                                                                                                                                                                             | Project Applicant. | Community Development Department |
| 3.18 Existing overhead PG&E infrastructure will be placed underground and all new electrical infrastructure will be installed via trenching and underground.                                                                                         | Prior to the first certificate of occupancy for each of the four subdivision groups (Bohn Ridge Subdivision, Equestrian Subdivision, Maha Farms Subdivision, and Denniston Golf Estates Subdivision), the full electrical network serving that subdivision within the project site boundaries shall be relocated underground or shall be installed where site conditions permit. | Project Applicant. | Community Development Department |

**Table 3: Settlement Agreement Commitments**

| Required Project Modifications                                                                                                                                                                                                                                        | Timing and Implementation               | Implementing Party | Monitoring Party |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|--------------------|------------------|
| <b>A) Wildfire-Related Project Modifications and Measures</b>                                                                                                                                                                                                         |                                         |                    |                  |
| i. The Recreational and Camping Area depicted on Exhibit B-3 [of the Settlement Agreement] will be reserved only for recreational and camping uses. Open fires shall be strictly prohibited. <i>Note, the Camping Area has been voluntarily removed from Phase I.</i> | At all times. Shall be included in SPD. | Project Applicant  | Lake County      |

| Required Project Modifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Timing and Implementation                                                                              | Implementing Party | Monitoring Party      |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------------|-----------------------|
| ii. The area consisting of the twenty-five building sites depicted on Exhibit B-1 [of the Settlement Agreement] will not be developed, and the associated parcels shall be removed from any and all maps. Those residential units may be relocated to the area depicted on Exhibit B-2 [of the Settlement Agreement].                                                                                                                                                                                                                                                                | Applicant shall include in updated Tentative Subdivision Maps                                          | Project Applicant  | Lake County           |
| iii. The areas consisting of the thirty-nine building sites depicted on Exhibit C-1 [of the Settlement Agreement] will not be developed for residential use, and the associated parcels shall be removed from any and all maps. Those residential units may be relocated to the area depicted in Exhibit C-2 [of the Settlement Agreement].                                                                                                                                                                                                                                          | Applicant shall include in updated Tentative Subdivision Maps                                          | Project Applicant  | Lake County           |
| iv. As indicated on the Roadway Plan attached as Exhibit D [of the Settlement Agreement], no dead-end, non-looped road segment may exceed one mile in length.                                                                                                                                                                                                                                                                                                                                                                                                                        | Applicant shall include in updated Tentative Subdivision Maps                                          | Project Applicant  | Lake County           |
| v. To the extent that the topography feasibly permits, an area of approximately 10 feet on each side of the roadways will be improved with hardscape, as depicted on Exhibit E [of the Settlement Agreement].                                                                                                                                                                                                                                                                                                                                                                        | Applicant shall include in Updated Wildfire Prevention Plan (WPP)                                      | Project Applicant. | Lake County           |
| vi. The Guenoc Valley Project Homeowners Association (“HOA”) will be required by its by-laws to contract with a wildfire expert for the duration of the Project. The costs of retaining that service provider will be paid by the HOA, and will be covered as part of HOA dues. The HOA shall consult with the wildfire expert in its implementation of wildfire prevention measures, including those identified in the Wildfire Prevention Plan. The HOA shall send to the Attorney General’s Office a copy of the by-laws within thirty (30) calendar days of adoption by the HOA. | Applicant shall include in Updated WPP and in the CC&Rs and is the responsibility of the HOA. (TM COA) | Project Applicant  | Lake County           |
| vii. The Project’s Emergency Response Center will have on-site at least one individual with wildfire expertise related to evacuation and emergency access. The costs of retaining that individual or individuals will be paid by the HOA, which will be covered with HOA dues. After thirty (30) years from the date on which the HOA is established, the HOA may stop implementing and sunset this obligation upon a majority vote of the HOA membership and subsequent notice to the State of such vote.                                                                           | Applicant shall include in Updated WPP and in the CC&Rs and is the responsibility of the HOA. (TM COA) | Project Applicant. | Lake County           |
| viii. The Applicant shall pay to the Lake County Fire Protection District (“LCFPD”), on an annual basis, the amount determined by LCFPD to be necessary in order to staff and equip the Emergency Response Center for fire services, including wildfire response.                                                                                                                                                                                                                                                                                                                    | Ongoing                                                                                                | Project Applicant  | South Lake County FPD |



| Required Project Modifications             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Timing and Implementation                                                                                   | Implementing Party                            | Monitoring Party |
|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|-----------------------------------------------|------------------|
| <b>B) GHG Emissions Reduction Measures</b> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                             |                                               |                  |
| 1                                          | <i>Residential Land Uses</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                                             |                                               |                  |
| a.                                         | The Applicant shall install photovoltaic (“PV”) systems on all residential land use structures within the Project site where site parameters and constraints allow for adequate on-site rooftop and other on-site spaces (such as ground-mounted panels or panels on carports or other surfaces) to comply with Section 110.10(a) of the California Building Energy Efficiency Standards. The minimum electrical generation capacity of the PV Systems shall be equal to or greater than the projected energy needs, collectively, of all residential land use structures that the PV systems will serve. The Applicant shall inform residents, at the time of initial sale or at the time of subsequent sale of each residential land use structure, through placement of a requirement in the Covenants, Conditions and Restrictions (“CC&Rs”) that will govern the HOA for each residential land use structure, that the Applicant is responsible for the repair and maintenance of each PV system, or any cleaner or technologically superior system of greater efficacy that is installed, for at least thirty (30) years from the date of initial installation. | At time of first occupancy. Applicant shall include in CC&Rs and is the responsibility of the HOA. (TM COA) | Project Applicant                             | Lake County      |
| b.                                         | The Applicant shall install battery energy storage systems for all residential land use structures and shall design the battery energy storage systems to store the energy produced by the PV systems during daylight hours and discharge that stored energy during evening and nighttime hours, and sized to maximize self-generation and minimize electricity exports to the grid, with an efficiency of at least 80 percent (80%). The Applicant shall design and install the battery energy storage systems to provide energy savings benefits found in Section 150.1 of the California Building Energy Efficiency Standards for thirty (30) years from the date of initial installation.                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | At time of first occupancy.                                                                                 | Project Applicant                             | Lake County      |
| c.                                         | All PV systems and battery energy storage systems shall be installed and operated consistent with all applicable state laws, regulations and local ordinances, including building codes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Construction                                                                                                | Project Applicant and Construction Contractor | Lake County      |

| Required Project Modifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Timing and Implementation                                                                                   | Implementing Party                            | Monitoring Party |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|-----------------------------------------------|------------------|
| d. The Applicant shall install one fully operable Level 2 or higher-capacity Electric Vehicle Supply Equipment (“EVSE”) of at least 240 volts in an appropriate location at each residential land use structure within the Project site. The Applicant shall inform residents, at the time of initial sale or at the time of subsequent sale of each residential land use structure, through placement of a requirement in the CC&Rs that will govern the HOA for each residential land use structure, that the Applicant is responsible for the repair and maintenance of each EVSE, or any cleaner or technologically superior system of greater efficacy that is installed, for at least thirty (30) years from the date of initial installation. | At time of first occupancy. Applicant shall include in CC&Rs and is the responsibility of the HOA. (TM COA) | Project Applicant                             | Lake County      |
| e. The Applicant shall prohibit the use and extension of all natural gas infrastructure within the Project site. Specifically, the Project shall include in the CC&Rs and/or other enforceable obligations a prohibition on the installation or operation of natural gas infrastructure within the Project site for residential land use structures. Pre-existing natural gas infrastructure at the Project site, if any, shall be capped or removed.                                                                                                                                                                                                                                                                                                | Applicant shall include in CC&Rs                                                                            | Project Applicant.                            | Lake County      |
| f. The Applicant shall require that all appliances in residential land uses (including water heaters, space conditioning systems, and cooking stoves), operate on energy sources other than natural gas. Appliances, other than those used for stovetop cooking, shall operate on electricity.                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Applicant shall include in CC&Rs                                                                            | Project Applicant.                            | Lake County      |
| g. The Applicant shall install high-efficiency, variable capacity heat pumps at all residential land use structures that comply, at a minimum, with the 2022 edition of Title 24, California Code of Regulations, Part 6 and that will provide energy for space and water heating appliances and clothes drying.                                                                                                                                                                                                                                                                                                                                                                                                                                     | Prior to Certificate of Occupancy                                                                           | Project Applicant and Construction Contractor | Lake County      |
| <b>2 Non-Residential Land Uses</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                             |                                               |                  |
| a. The Applicant shall ensure that on-site generation of renewable energy is sufficient to produce electricity to supply energy for all nonresidential land use structures. To comply with this requirement, the Applicant shall install any combination of the following:<br>1. PV systems coupled with battery energy storage systems<br>A. PV systems on non-residential land use structures within the Project site (including parking structures) where site parameters and constraints allow for adequate on-site rooftop and other on-site spaces (such as ground-mounted panels or panels on carports or other surfaces) to comply with Section 110.10(a) of the California Building Energy Efficiency Standards.                            | At time of occupancy. Ongoing.                                                                              | Project Applicant.                            | Lake County      |

| Required Project Modifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Timing and Implementation | Implementing Party | Monitoring Party |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|--------------------|------------------|
| <p>The Applicant shall inform purchasers or tenants, at the time of initial sale or lease or at the time of subsequent sale or lease of each non-residential land use structure, through placement of a requirement in the CC&amp;Rs that will govern the HOA for each non-residential land use structure, that the Applicant is responsible for the repair and maintenance of each PV system, or any cleaner or technologically superior system of greater efficacy that is installed, for at least thirty (30) years from the date of initial installation.</p>                                                     |                           |                    |                  |
| <p>B. Battery energy storage systems for all nonresidential land use structures and shall design the battery energy storage systems to store the energy produced by the PV systems during daylight hours and discharge that stored energy during evening and nighttime hours, and sized to maximize self-generation and minimize electricity exports to the grid, with an efficiency of at least 80 percent (80%). The Applicant shall design and install the battery energy storage systems to provide energy savings benefits for thirty (30) years from the date of initial installation.</p>                      |                           |                    |                  |
| <p>C. All non-residential structures shall comply with the applicable prescriptive requirements for PV and battery energy storage systems sizing specified by the 2022 edition of Title 24, California Code of Regulations, Part 6, section 141.10, effective January 1, 2023, including any subsequently enacted revisions.</p>                                                                                                                                                                                                                                                                                      |                           |                    |                  |
| <p>D. All PV systems and battery energy storage systems shall be installed and operated consistent with all applicable state laws, regulations and local ordinances, including building codes.</p>                                                                                                                                                                                                                                                                                                                                                                                                                    |                           |                    |                  |
| <p>2. On-site solar farms</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                           |                    |                  |
| <p>A. On-site solar farms to reduce the Project's GHG emissions. The solar farms, in combination with any other on-site PV systems installed to serve the Project's non-residential land uses, shall have the capacity to generate an amount of renewable energy that is equivalent to, or exceeds, 5,500,000 kWh per year, which is the estimated electricity consumption for those land uses as described in the EIR. The Applicant shall site the solar farms in areas served by existing roads to the extent possible and in a manner that minimizes harm to biological resources and wildfire ignition risk.</p> |                           |                    |                  |

| Required Project Modifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | Timing and Implementation                                                                                              | Implementing Party       | Monitoring Party   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------|--------------------------|--------------------|
| <p>b. For the non-residential land uses of the Project, the Applicant shall install at least 300 fully-operable, publicly-accessible Level 2 or higher-capacity Electrical Vehicle Charging Stations (“EVCS”) of at least 240 volts with at least two ports per charger and 20 fully operable publicly-accessible Level 3 EVCS/Fast Chargers. The Applicant shall ensure that the EVCS are preferential parking spaces for electric vehicles (“EVs”) that comply with Tier 2 of Section A5.105.8.1 and Tier 2 of Section A5.106.5.3 of the California Green Building Standards and strategically located to maximize availability. The dedicated EVs spaces shall be in preferential locations, but shall not be located in a way that prevents compliance with requirements in the California Vehicle Code regarding parking spaces for disabled persons or disabled veterans. All publicly-accessible Level 2 and Level 3 EVCS shall be marked with signage indicating that improperly parked vehicles blocking access to the EV charging will be towed. Further, the Applicant shall inform purchasers or tenants, at the time of initial sale or lease, or at the time of subsequent sale or lease, of each non-residential land use structure, through placement of a requirement in the CC&amp;Rs that will govern the HOA for each nonresidential land use structure, that the Applicant is responsible for the repair and maintenance of each EVSC, or any cleaner or technologically superior system of greater efficacy that is installed, for at least thirty (30) years from the date of initial installation.</p> | <p>At time of first occupancy. Applicant shall include in CC&amp;Rs and is the responsibility of the HOA. (TM COA)</p> | <p>Project Applicant</p> | <p>Lake County</p> |
| <p>c. Except as set forth below, the Applicant shall prohibit the use and extension of all natural gas infrastructure within the Project site for all non-residential land use structures. Specifically, the Project shall include in the CC&amp;Rs and/or other enforceable obligations a prohibition on the installation or operation of natural gas infrastructure within the Project site for non-residential land use structures. Except as set forth below, any preexisting natural gas infrastructure shall be capped or removed, and outdoor fires and the use of natural gas-fueled appliances shall be prohibited within, the Project site.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | <p>Applicant shall include requirements in CC&amp;Rs</p>                                                               | <p>Project Applicant</p> | <p>Lake County</p> |



| Required Project Modifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Timing and Implementation                     | Implementing Party                            | Monitoring Party                                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|-----------------------------------------------|-------------------------------------------------------|
| <p>d. Except as set forth below, the Applicant shall require that nonresidential land use structures are all-electric, except where it is infeasible for a building to comply with the applicable building codes if it is all-electric. Further, the Applicant shall require that all non-residential land use structures are constructed to accommodate electric appliances exclusively, including water heaters, space conditioning systems, clothes drying and cooktops.</p> <ol style="list-style-type: none"> <li>1. The Applicant shall be permitted to install, and operate, natural gas-fueled or propane-cooktops in restaurant kitchens.</li> <li>2. The Applicant shall be permitted to install, and operate, natural gas-fueled or propane-fire pits in the outdoor patio areas of restaurants.</li> </ol>                                                                                                                                                                                                                                                                                                                                                                                                                             | Applicant shall include requirements in CC&Rs | Project Applicant.                            | Lake County                                           |
| <p>e. The Applicant shall install high-efficiency, variable capacity heat pumps at all non-residential land use structures that comply, at a minimum, with the 2022 edition of Title 24, California Code of Regulations, Part 6 and that will provide energy for space and water heating appliances and clothes drying.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Prior to Certificate of Occupancy             | Project Applicant and Construction Contractor | Lake County                                           |
| <p>3 <i>Off-Site GHG Emissions Reduction Measures</i></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                               |                                               |                                                       |
| <p>a. The Applicant's Obligation to Purchase GHG Offset Credits. The Applicant shall, for thirty (30) years from the date of issuance of the initial occupancy permit for the Project, annually purchase and retire voluntary market GHG Offset Credits listed with, and verified by, a CARB-approved Registry. Such credits shall be purchased annually in an amount sufficient to offset the Project's actual GHG emissions in each year. The current estimate is that 14,865 credits will be required annually for that purpose, and the Applicant will make an annual purchase in that amount by the issuance of the initial occupancy permit for Phase 1 of the Project. Future events or developments may affect the availability and utility of the GHG Offset Credits, and the Project's actual GHG emissions. These factors may support an adjustment to the amount of GHG Offset Credits that the Applicant is required to purchase under this Subsection. The Applicant may seek the State's consent in the future to an adjustment of this requirement, and the State will consider such request in good faith. Any adjustment to the amount of GHG Offset Credits to be purchased by the Applicant shall be consistent with CEQA.</p> | At time of initial occupancy. Ongoing.        | Project Applicant.                            | Community Development Department and Attorney General |

| Required Project Modifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Timing and Implementation                         | Implementing Party        | Monitoring Party                                             |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|---------------------------|--------------------------------------------------------------|
| <p>b. Performance Standards</p> <p>1. The Applicant shall ensure that all GHG Offset Credits purchased to comply with this Agreement:</p> <p>A. Are purchased for GHG Emissions Offsets with the following geographic priorities: (1) offsets within the County; (2) offsets within the State of California, only if in-county offsets are unavailable; (3) offsets within the United States, only if in-state offsets are unavailable; and (4) international offsets only if in-nation offsets are unavailable.</p> <p>B. Represent past reduction or sequestration of GHG emissions that is not otherwise required. (Cal. Code Regs., tit. 14, § 15126.4, subd. (c)(3).)</p> <p>C. Are “Real,” “Additional,” “Quantifiable,” “Permanent,” and “Verifiable,” as those terms are defined in California Code of Regulations, title 17, section 95802, subdivision (a).</p> <p>D. Comply with the “additionality requirements” for Offset Projects set forth in California Code of Regulations, title 17, section 95973, subdivision (a)(2).</p> <p>E. Comply with the Verification of GHG Emissions Reductions requirements for Offset Projects set forth in in California Code of Regulations, title 17, section 95977.</p> <p>F. Given a unique serial or tracking number to ensure there is no duplication or double counting.</p> <p>2. The Applicant shall not rely upon any GHG Offset Credit purchased to comply with this Agreement for any other project or to satisfy any other contractual obligation.</p> | <p>At time of initial occupancy.<br/>Ongoing.</p> | <p>Project Applicant.</p> | <p>Community Development Department and Attorney General</p> |
| <p>4 <i>Compliance Protocols</i></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                   |                           |                                                              |
| <p>a. The Applicant shall ensure that all GHG Offset Credits purchased to comply with this Agreement are purchased for GHG Emissions Offsets that comply with an applicable Offset Compliance Protocol from a CARB-approved Offset Registry that satisfies all of the CARB Offset Protocol standards in California Code of Regulations, title 17, section 95972, or any new standards that may become applicable to CARB Offset Protocols during the thirty (30) years starting from date of issuance of the initial occupancy permit for the Project.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | <p>At time of initial occupancy.<br/>Ongoing.</p> | <p>Project Applicant.</p> | <p>Community Development Department and Attorney General</p> |

| Required Project Modifications                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Timing and Implementation                                                                    | Implementing Party | Monitoring Party                 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|--------------------|----------------------------------|
| 5 <i>Monitoring, Reporting, and Recordkeeping</i>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                              |                    |                                  |
| a. The Applicant shall select and retain at least one independent, third-party expert on GHG mitigation and offsets to review the documentation provided by the Applicant relating to, among other data, construction- and operation-related emissions, and provide analysis and recommendations to the County, providing the State with a copy of same for information purposes, on whether the Applicant has complied with the off-site GHG emissions reduction measures set forth in this Agreement. The Applicant's selection of each expert, who shall not be a current or former employee or agent of the Applicant, shall be subject to the approval of the Attorney General's Office, which shall not be unreasonably withheld. The Applicant shall retain the expert(s) and fund the activities of the expert(s) starting from the issuance of the first site development permit or the first building permit, whichever occurs earliest, through thirty (30) years after an expert is retained. | Start with issuance of first building or site development permit, whichever occurs earliest. | Project Applicant. | Lake County                      |
| b. Each year, the expert(s) retained by the Applicant shall prepare a report and make specific findings as to whether the Applicant has met the requirements set forth in Sections 1(b)(i)–(iii) of this Agreement.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Ongoing.                                                                                     | Project Applicant. | Lake County                      |
| c. The Applicant shall provide the expert report and findings to the County and the Attorney General's Office on an annual basis. The Applicant shall also, upon request by the County or the Attorney General's Office, make available within a reasonable time all evidence upon which the expert relied to make such findings.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Ongoing.                                                                                     | Project Applicant. | Lake County and Attorney General |

April 15, 2026

Max Stockton  
County of Lake  
Department of Community Development

Re: PL-26-9 Anasu Farms Subdivision  
16,000-acre Guenoc Valley Site with the nearest property 21423 Butts Canyon Rd,  
Middletown; APNs 013-022-09, 10, 16, 17, 20, 21, 22, 23, 34

Dear Max,

Thank you for providing PG&E the opportunity to review the Anasu Farms Subdivision plans dated Feb 9, 2026.

PG&E does not have comments in regard to the tentative subdivision at this time because the plans do not have sufficient detail to determine what if any impact there will be to the Company's electric distribution and service lines within the project area.

However, plans for the Anasu Farms subdivision must include adequate clearance and protection for PG&E facilities and easements. Site plans showing the location of improvements relative to PG&E facilities should be sent to [PGEPlanreview@pge.com](mailto:PGEPlanreview@pge.com).


To request delineation maps for further review of PG&E's existing facilities, please submit to the following mailbox for gas maps: [DelineationMapRequests@pge.com](mailto:DelineationMapRequests@pge.com). For electric maps, submit through PG&E's JUMP Portal: [Joint Use Map Portal](#). Please note, when a request is submitted, the Delineation Team member will confirm with you if a Nondisclosure Agreement needs to be completed.

For any requests to modify or relocate PG&E existing facilities, or to request gas and/or electric service, please submit an application to PG&E's Service Planning department through PG&E's Your Project Portal: [Sign In \(yourprojects-pge.com\)](#).

As a reminder, before any digging or excavation occurs, please contact Underground Service Alert (USA) by dialing 811 a minimum of two (2) working days prior to commencing any work. This free and independent service will ensure that all existing underground utilities are identified and marked on-site.

If you have any questions regarding this response, please contact me at (916) 217-1057 or [Vincent.Fazzi@pge.com](mailto:Vincent.Fazzi@pge.com).

Sincerely,



Vince Fazzi  
Land Management



**From:** [Bryant, Claire@Wildlife](mailto:Bryant.Claire@Wildlife)  
**To:** [Max Stockton](#)  
**Subject:** [EXTERNAL] RE: Request for Review PL-26-9  
**Date:** Friday, March 20, 2026 11:20:40 AM  
**Attachments:** [image001.png](#)

---

Dear Max Stockton:

The California Department of Fish and Wildlife (CDFW) received and reviewed the Request for Review from Lake County Community Development Department (LCCDD) for the Anasu Farms Phased Vesting Tentative Map (Project). Thank you for the opportunity to provide comments and recommendations regarding those activities involved in the Project that may affect California fish, wildlife, native plants, and their habitat.

I recommend the proposed subdivision map page G0.02 key language be updated from Habitat Corridor to Habitat Connectivity Easement Area to be consistent with the Guenoc Valley Mixed Use Planned Development Project EIR's language usage.

Sincerely,

[Claire Bryant](#)

Environmental Scientist

CDFW Region 2

(530) 333-7748

---

**From:** Max Stockton <Max.Stockton@lakecountyca.gov>  
**Sent:** Tuesday, March 3, 2026 3:42 PM  
**To:** Vance Ricks <Vance.Ricks@lakecountyca.gov>; Cara Salmon <cara.salmon@lakecountyca.gov>; Ryan Lewelling <Ryan.Lewelling@lakecountyca.gov>; sham@blm.gov; cdavis@blm.gov; BLM\_CA\_Web\_ML@blm.gov; Michael.G.Nepstad@usace.army.mil; Zeferina.J.Ruvalcaba@usace.army.mil; Bryant, Claire@Wildlife <Claire.Bryant@Wildlife.ca.gov>; Wood, Dylan@Wildlife <Dylan.Wood@wildlife.ca.gov>; Christy.M.Morgan@usace.army.mil; Gjerde, Daniel W@DOT <Daniel.Gjerde@dot.ca.gov>; ROBERTSON, JESSE GRAHAM@DOT <jesse.robertson@dot.ca.gov>; WB-RB5S-CentralValleySacramento <CentralValleySacramento@waterboards.ca.gov>; Tadlock, Stephanie@Waterboards <Stephanie.Tadlock@waterboards.ca.gov>; Duncan, Paul@CALFIRE <Paul.Duncan@fire.ca.gov>; Wink, Mike@CALFIRE <Mike.Wink@fire.ca.gov>; alancaster@lakecountyfire.com; Katherine Vanderwall <Katherine.Vanderwall@lakecountyca.gov>; Douglas Gearhart <doug@lcaqmd.net>; Douglas Gearhart <doug@lcaqmd.net>; Elizabeth Knight <elizabethk@lcaqmd.net>; Katie Carpenter <Katie.Carpenter@lakecountyca.gov>; rvineyards@sonic.net; mathtownhall@gmail.com; lakecountycwa@gmail.com; PGEPlanReview@pge.com; roberta.lyons@att.net; redbud.audubon@gmail.com; donnammackiewicz@gmail.com; elioth@sscra.org; wshock@mchsi.com; nwic@sonoma.edu  
**Subject:** Request for Review PL-26-9

---

CALIFORNIA  
HISTORICAL  
RESOURCES  
INFORMATION  
SYSTEM



ALAMEDA  
COLUSA  
CONTRA COSTA  
DEL NORTE

HUMBOLDT  
LAKE  
MARIN  
MENDOCINO  
MONTEREY  
NAPA  
SAN BENITO

SAN FRANCISCO  
SAN MATEO  
SANTA CLARA  
SANTA CRUZ  
SOLANO  
SONOMA  
YOLO

**Northwest Information Center**  
Sonoma State University  
1400 Valley House Drive, Suite 210  
Rohnert Park, California 94928-3609  
Tel: 707.588.8455  
nwic@sonoma.edu  
<https://nwic.sonoma.edu>

March 19, 2026

File No.: 25-1314

Max Stockton, Project Planner  
Lake County  
Community Development Department  
255 N. Forbes Street  
Lakeport, CA. 95453

re: PL-26-9/ Bohn Valley 1, LLC and Butts Creek, LLC

Dear Max Stockton,

Records at this office were reviewed to determine if this project could adversely affect cultural resources.

**Please note that use of the term cultural resources includes both archaeological sites and historical buildings and/or structures. The review for possible historic-era building/structures, however, was limited to references currently in our office and should not be considered comprehensive.**

**Project Description:**

Anasu Farms is the first Phased Vesting Tentative Map (PVTM) package for the Guenoc Valley project. It includes up to 8 distinct phases (see sheet AF1.30), with the inclusion of 1 encroachment from Butts Canyon Road (Entry Intersection 2 of approximately 0.6ac per sheet AF1.01) for 34 new parcels (30 resort residential, 1 commercial, 3 facility) and 6 peripheral parcels (from 9 existing parcels). Work proposed will include applicable road infrastructure, Water Reclamation Facility (WRF), fire suppression tanks, and an electrical substation.

**Previous Studies:**

XX This office has record of the below listed previous cultural resource studies by a professional archaeologist or architectural historian that include portions of the proposed project areas:

| Report No. | Authors                            | Year | Title                                                                                                                   |
|------------|------------------------------------|------|-------------------------------------------------------------------------------------------------------------------------|
| S-000639   | Roger Werner                       | 1977 | An Archaeological Reconnaissance of the Proposed Expansion of Detert Reservoir, Guenoc Valley, Lake County, California. |
| S-012398   | Mark Gary                          | 1991 | Archaeological Review of Guenoc VMP (RX-I-008-LNU) (letter report)                                                      |
| S-016195   | Thomas M. Origer                   | 1994 | A Cultural Resources Survey for the Guenoc Ranch Vineyard Driveway, Lake County, California                             |
| S-020737   | Patti J. Johnson and Ann S. Peak   | 1974 | Survey of Cultural Resources, Guenoc Ranch, Lake and Napa Counties, California                                          |
| S-021248   | Vicki R. Beard                     | 1997 | A Cultural Resources Study of Portions of the Guenoc Ranch, Lake and Napa Counties, California                          |
| S-023131   | Thomas Origer and Sue-Ann Schroder | 2000 | A Cultural Resources Survey of Selected Portions of Guenoc Ranch, Lake and Napa Counties, California                    |

|          |                                                                    |      |                                                                                                               |
|----------|--------------------------------------------------------------------|------|---------------------------------------------------------------------------------------------------------------|
| S-032559 | J. Charles Whatford                                                | 2006 | Archaeological Survey Report, Guenoc VMP, RX North-061 LNU                                                    |
| S-047017 | J. Charles Whatford                                                | 2015 | Jerusalem Fire, Cultural Resources Narrative                                                                  |
| S-047190 | J. Charles Whatford                                                | 2015 | Valley Fire Cultural Resources Narrative                                                                      |
| S-047663 | Michael Darcangelo and Jennifer Thomas                             | 2016 | Cultural Resources Monitoring for the Valley Fire in Lake, Napa, and Sonoma Counties, California              |
| S-051359 | Nationwide Infrastructure Support Technical Assistance Consultants | 2017 | Cultural Resource Inventory, Hazardous Tree Removal Project, Lake County, California, FEMA-4240-DR-CA PW 33-B |

#### **Archaeological and Native American Resources Recommendations:**

XX The proposed project area contains or is adjacent to the archaeological sites. It is recommended that a qualified professional archaeologist update the conditions of these sites on Office of Historic Preservation's DPR 523 resource recordation forms, assess potential impacts of the proposed project activities on these resources, and provide project-specific recommendations as warranted prior to commencement of project activities.

| Primary No. | Trinomial      |
|-------------|----------------|
| P-17-000116 | CA-LAK-000091  |
| P-17-000255 | CA-LAK-000234  |
| P-17-000400 | CA-LAK-000388  |
| P-17-000402 | CA-LAK-000390  |
| P-17-000403 | CA-LAK-000391  |
| P-17-000404 | CA-LAK-000392  |
| P-17-000405 | CA-LAK-000393  |
| P-17-000406 | CA-LAK-000394H |
| P-17-000409 | CA-LAK-000397  |
| P-17-000418 | CA-LAK-000406  |
| P-17-000425 | CA-LAK-000413H |
| P-17-001363 | CA-LAK-001821  |
| P-17-001959 | CA-LAK-001885  |
| P-17-001960 | CA-LAK-001886  |
| P-17-001961 | CA-LAK-001887  |
| P-17-001962 | CA-LAK-001888  |
| P-17-001963 | CA-LAK-001889  |
| P-17-001964 |                |
| P-17-001965 | CA-LAK-001890  |
| P-17-001969 |                |
| P-17-001970 |                |
| P-17-001971 |                |
| P-17-001972 |                |
| P-17-001973 |                |
| P-17-001974 |                |
| P-17-001975 |                |

| Primary No. | Trinomial       |
|-------------|-----------------|
| P-17-001976 |                 |
| P-17-001977 |                 |
| P-17-001978 |                 |
| P-17-002028 | CA-LAK-001929   |
| P-17-002029 | CA-LAK-001930H  |
| P-17-002030 | CA-LAK-001931   |
| P-17-002034 | CA-LAK-001935   |
| P-17-002040 | CA-LAK-001939   |
| P-17-002045 | CA-LAK-001941   |
| P-17-002046 | CA-LAK-001942/H |
| P-17-002947 | CA-LAK-002261   |
| P-17-002952 | CA-LAK-002266H  |
| P-17-002954 |                 |
| P-17-002960 | CA-LAK-002272H  |
| P-17-003012 | CA-LAK-002310H  |

XX We recommend the lead agency contact the local Native American tribe(s) regarding traditional, cultural, and religious heritage values. For a complete listing of tribes in the vicinity of the project, please contact the Native American Heritage Commission at 916/373-3710.

**Built Environment Recommendations:**


XX The 1958 USGS Aetna Springs, Detert Reservoir, and Morgan Valley 7.5' quads depict buildings and/or structures in the proposed project area. If present, these unrecorded buildings or structures meet the Office of Historic Preservation's (OHP) minimum age standard that buildings, structures, and objects 45 years or older may be of historical value, and therefore, it is recommended that prior to commencement of project activities, a qualified professional familiar with the architecture and history of Lake County conduct a formal CEQA evaluation.

Due to processing delays and other factors, not all of the historical resource reports and resource records that have been submitted to the Office of Historic Preservation are available via this records search. Additional information may be available through the federal, state, and local agencies that produced or paid for historical resource management work in the search area. Additionally, Native American tribes have historical resource information not in the California Historical Resources Information System (CHRIS) Inventory, and you should contact the California Native American Heritage Commission for information on local/regional tribal contacts.

The California Office of Historic Preservation (OHP) contracts with the California Historical Resources Information System's (CHRIS) regional Information Centers (ICs) to maintain information in the CHRIS inventory and make it available to local, state, and federal agencies, cultural resource professionals, Native American tribes, researchers, and the public. Recommendations made by IC coordinators or their staff regarding the interpretation and application of this information are advisory only. Such recommendations do not necessarily represent the evaluation or opinion of the State Historic Preservation Officer in carrying out the OHP's regulatory authority under federal and state law.

For your reference, a list of qualified professionals in California that meet the Secretary of the Interior's Standards can be found at <http://www.chrisinfo.org>. If archaeological resources are encountered during the project, work in the immediate vicinity of the finds should be halted until a qualified archaeologist has evaluated the situation. If you have any questions please give us a call (707) 588-8455.

Sincerely,

A handwritten signature in black ink, appearing to read 'Dana Richards', with a stylized flourish at the end.

Dana Richards  
Researcher





**COUNTY OF LAKE**  
Health Services Department  
Environmental Health Division  
922 Bevins Court  
Lakeport, California 95453-9739  
Telephone 707/263-1090  
FAX 707/263-4395

Denise Pomeroy  
Health Services Director

Erin Gustafson, MD  
Public Health Officer

Jasjit Kang  
Environmental Health Director

## *Promoting an Optimal State of Wellness in Lake County*

### **Memorandum**

**DATE:** August 21, 2019  
**TO:** Byron Turner, Principal Planner  
**FROM:** Tina Dawn-Rubin, Environmental Health Aide  
**RE:** GPAP 18-01 General Plan of Development Guenoc Valley Mixed Use Project  
**APN:** 014-310-091 22000 Butts Canyon Rd, Middletown – Various APNS for development project

The applicant must meet the Lake County Division of Environmental Health requirements regarding on-site wastewater treatment and potable water requirements if a public sewer and/or water system will not be utilized.

Applicant may need to obtain a water supply permit from the State Water Resources Control Board – Division of Drinking Water.

The applicant must comply with the California Retail Food Code Regulations and applicant must have a potable water supply.

The applicant must apply and pay for plan check application: submit three sets of complete plans and supporting documents for review of any proposed retail food facility and must obtain approval from the Division of Environmental Health for construction before obtaining any building permits. Food facilities must be permitted and inspected prior to opening to the public.

The applicant must comply with the California Health and Safety Code for the construction and operation of a public swimming pool and/or spa. The applicant must submit complete sets of plans to this Division for approval, before obtaining any building permits. The pool/spa must be permitted and inspected by this Division.



COUNTY OF LAKE  
HEALTH SERVICES  
prevent.promote.protect.

If the applicant stores hazardous materials equal or greater than 55 gallons of a liquid, 500 pounds of a solid or 200 cubic feet of compressed gas, the applicant will be required to submit a Hazardous Materials Inventory Disclosure Statement/ Business Plan to the Environmental Health Division via the California Electronic Reporting System (CERS) and it shall be renewed and updated annually or if quantities increase.

If the amount of hazardous materials is less than the above quantities, the applicant will need to complete and submit a Hazardous Materials/Waste Declaration stating the name of the material and the quantity to be stored on site.

If the applicant increases hazardous material storage, they will need to update their Hazardous Materials Business Plan.

All wells shall be located an adequate horizontal distance from potential sources of contamination and pollution. The storage of hazardous materials shall be located a safe distance from any water well to prevent contamination. The applicant is required to implement measures to prevent contamination of the well(s).

Hazardous materials shall not be allowed to leak onto the ground or contaminate surface waters. Any release of a hazardous material must immediately be reported to Lake County Environmental Health (LCEH).

Collected hazardous or toxic materials shall be recycled or disposed of through a registered waste hauler to an approved site authorized to accept such materials.

Industrial Waste shall not be disposed of on-site without review or permit from the Environmental Health Division or the Regional Water Quality Control Board.

Hazardous Waste must be handled according to all Hazardous Waste Control Laws. Any generation of a hazardous waste must be reported to Lake County Environmental Health (LCEH) within thirty (30) days.

If Underground Storage Tanks will be on-site: The applicant must comply with the California Health and Safety Code 25280 et seq. Underground Storage Tank Laws. The applicant will need to apply and pay for an Underground Storage Tank System installation permit and submit three (3) sets of full plans to the Environmental Health Division for review and approval. The applicant shall comply with all Above Ground Petroleum Storage Tank Regulations.



**COUNTY OF LAKE**  
Health Services Department  
Environmental Health Division  
922 Bevins Court  
Lakeport, California 95453-9739  
Telephone 707/263-1164.  
FAX 707/263-1681

Craig Wetherbee  
Environmental Health Director

## *Promoting an Optimal State of Wellness in Lake County*

### **Memorandum**

**DATE:** April 28, 2026

**TO:** Max Stockton, Associate Planner

**FROM:** Pheakdey Preciado, Senior EHS

**RE:** RFR Tentative Subdivision PL-26-09, Package 1:  
Anasu Farms Subdivision/SR0017447

**APNS:** 013-022-09, ...-10, ...-16, ...-17, ...-20, ...21, ...-22,  
...-23, and ...-24

The Environmental Health Division recommends the developer contacts the Regional Water Control Board for permits and requirements to build a wastewater collection treatment plant due to volume of wastewater that will be generated. Please see our office's Memorandum dated 08/21/2019 that is attached for the Guenoc Valley mixed use planned development project.

